THE DATASHEET OF

TSF20L120C

www.win-source.net 0086-755-83957316

20A, 100V - 200V Trench Schottky Rectifier

FEATURES

- Patented Trench Schottky technology
- Excellent high temperature stability
- Low forward voltage
- Low power loss/ high efficiency
- High forward surge capability
- Compliant RoHS
- Halogen-free according to IEC 61249-2-21

APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Lighting application
- On-board DC/DC converter

MECHANICAL DATA

- Case: ITO-220AB
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Mounting torque: 0.56 N·m maximum
- Polarity: As marked
- Weight: 1.70g (approximately)

KEY PARAMETERS		
PARAMETER	**VALUE**	**UNIT**
I_F	20	A
V_{RRM}	100 - 200	V
I_{FSM}	100	A
$T_{J\ MAX}$	150	°C
Package	ITO-220AB	
Configuration	Dual dies	

Pb-Free RoHS COMPLIANT HALOGEN FREE



ITO-220AB

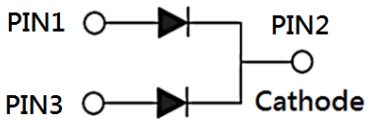

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C unless otherwise noted)

PARAMETER	SYMBOL	TSF20L 100C	TSF20L 120C	TSF20L 150C	TSF20L 200C	UNIT
Marking code on the device		TSF20L 100C	TSF20L 120C	TSF20L 150C	TSF20L 200C	
Repetitive peak reverse voltage	V_{RRM}	100	120	150	200	V
Reverse voltage, total rms value	$V_{R(RMS)}$	70	84	105	140	V
Forward current	I_F	20				A
Surge peak forward current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	100				A
Critical rate of rise of off-state voltage	dv/dt	10,000				V/μs
Junction temperature	T_J	-55 to +150				°C
Storage temperature	T_{STG}	-55 to +150				°C

THERMAL PERFORMANCE

PARAMETER	SYMBOL	TYP	UNIT
Junction-to-case thermal resistance	$R_{\Theta JC}$	4	°C/W

ELECTRICAL SPECIFICATIONS (T_A = 25°C unless otherwise noted)

PARAMETER		CONDITIONS	SYMBOL	TYP	MAX	UNIT
Forward voltage per diode[1]	TSF20L100C	I_F = 5A, T_J = 25°C	V_F	0.62	-	V
	TSF20L120C			0.68	-	V
	TSF20L150C			0.78	-	V
	TSF20L200C			0.81	-	V
	TSF20L100C	I_F = 10A, T_J = 25°C		-	0.86	V
	TSF20L120C			-	0.92	V
	TSF20L150C			-	0.95	V
	TSF20L200C			-	0.98	V
	TSF20L100C	I_F = 5A, T_J = 125°C		0.55	-	V
	TSF20L120C			0.58	-	V
	TSF20L150C			0.64	-	V
	TSF20L200C			0.67	-	V
	TSF20L100C	I_F = 10A, T_J = 125°C		0.64	0.72	V
	TSF20L120C			0.67	0.76	V
	TSF20L150C			0.71	0.80	V
	TSF20L200C			0.74	0.83	V
Reverse current @ rated V_R per diode[2]	TSF20L100C TSF20L120C TSF20L150C TSF20L200C	T_J = 25°C	I_R	-	100	μA
	TSF20L100C TSF20L120C	T_J = 125°C		-	15	mA
	TSF20L150C TSF20L200C			-	10	mA

Notes:

1. Pulse test with PW = 0.3ms
2. Pulse test with PW = 30ms

ORDERING INFORMATION

ORDERING CODE[1]	PACKAGE	PACKING
TSF20LxC	ITO-220AB	50 / Tube

Notes:

1. “x” defines voltage from 100V(TSF20L100C) to 200V(TSF20L200C)

CHARACTERISTICS CURVES

(T_A = 25°C unless otherwise noted)

Fig.1 Forward Current Derating Curve

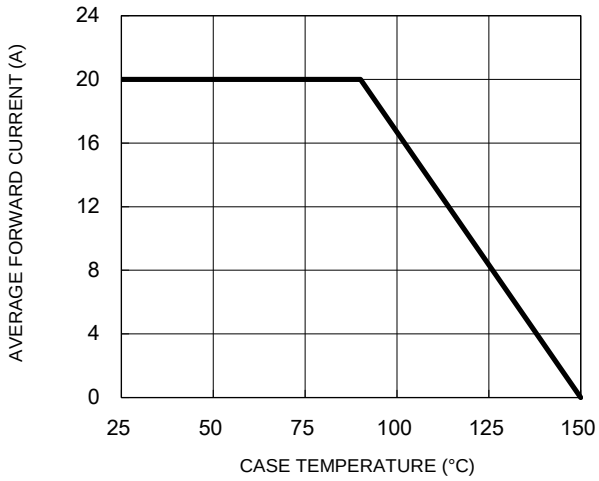

Fig.2 Typical Junction Capacitance

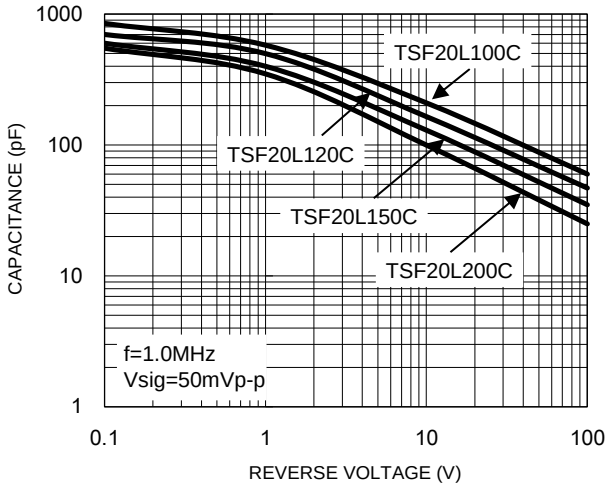

Fig.3 Typical Reverse Characteristics

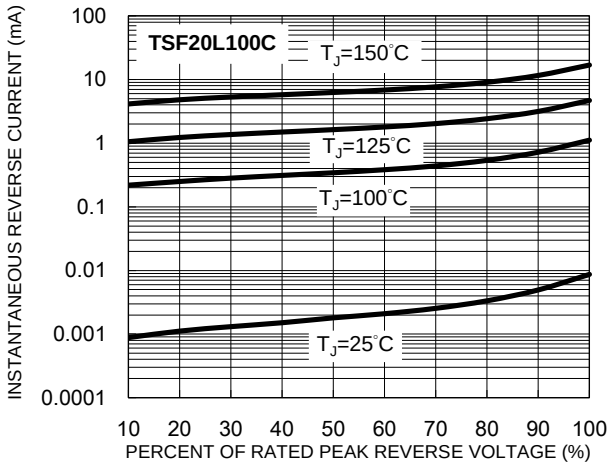

Fig.4 Typical Forward Characteristics

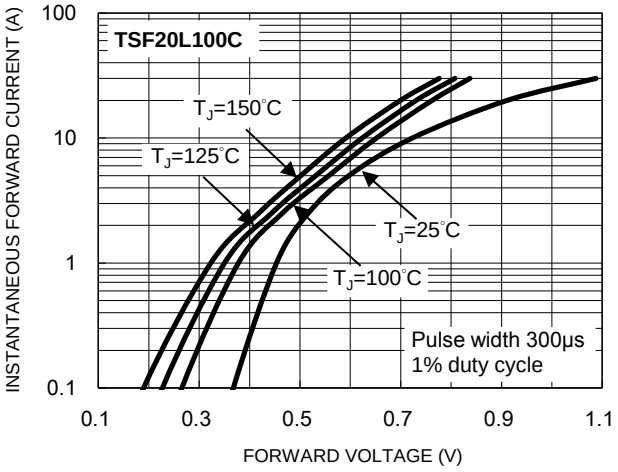

Fig.5 Typical Reverse Characteristics

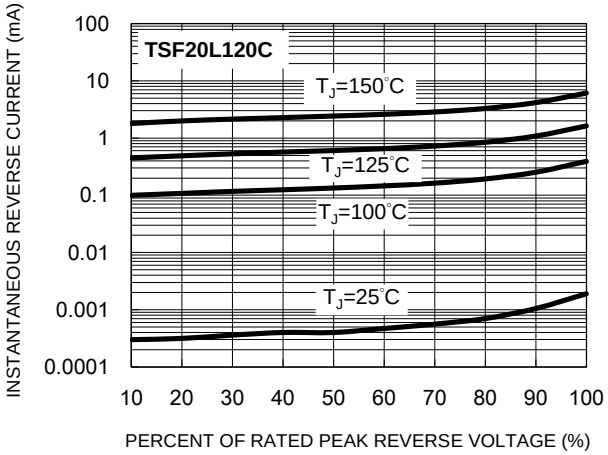

Fig.6 Typical Forward Characteristics

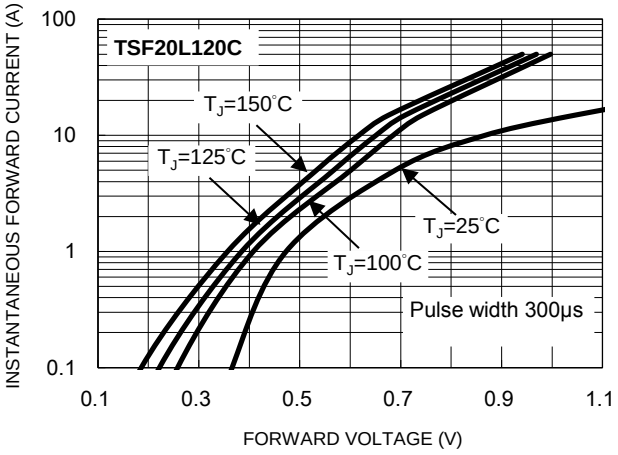

CHARACTERISTICS CURVES

(T_A = 25°C unless otherwise noted)

Fig.7 Typical Reverse Characteristics

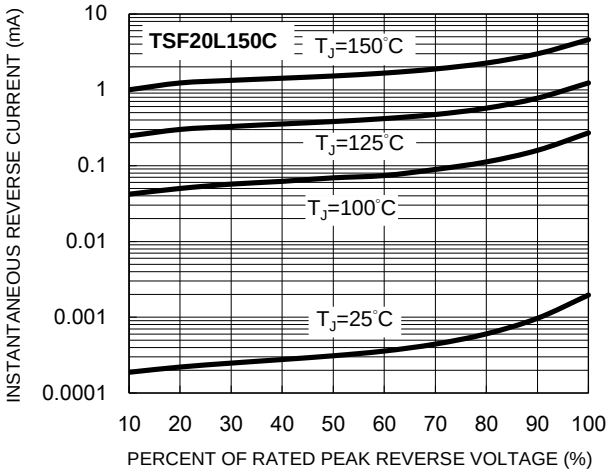

Fig.8 Typical Forward Characteristics

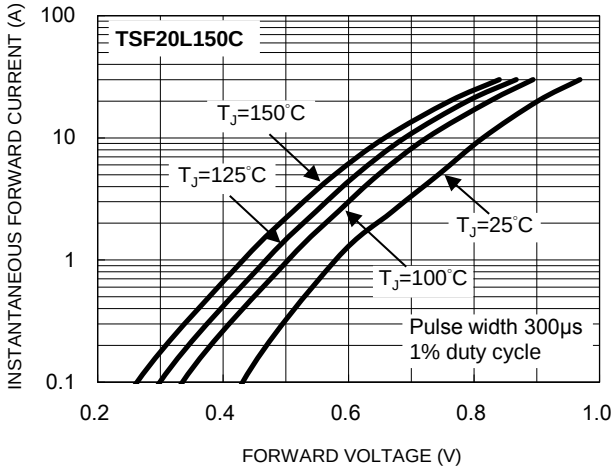

Fig.9 Typical Reverse Characteristics

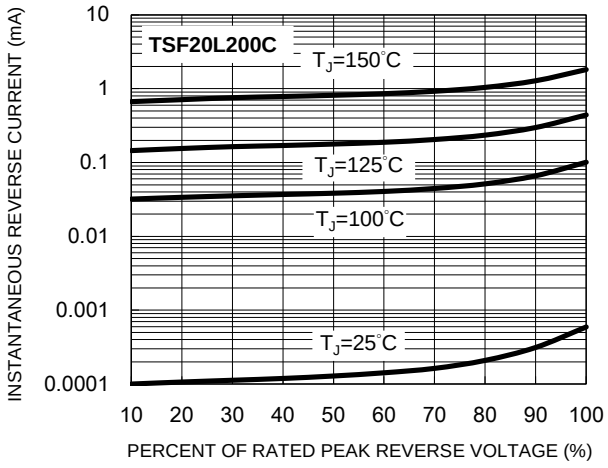

Fig.10 Typical Forward Characteristics

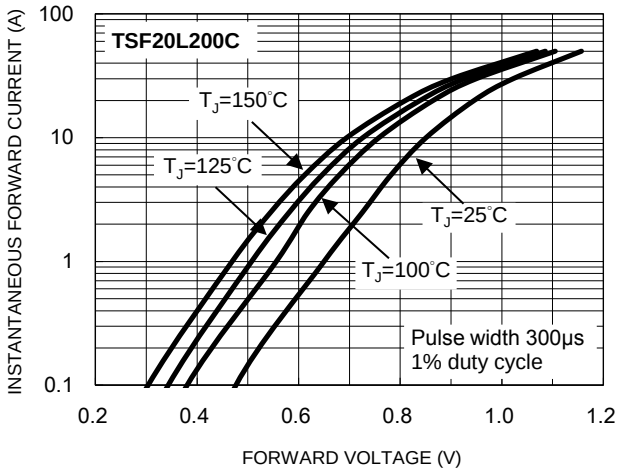

PACKAGE OUTLINE DIMENSIONS

ITO-220AB

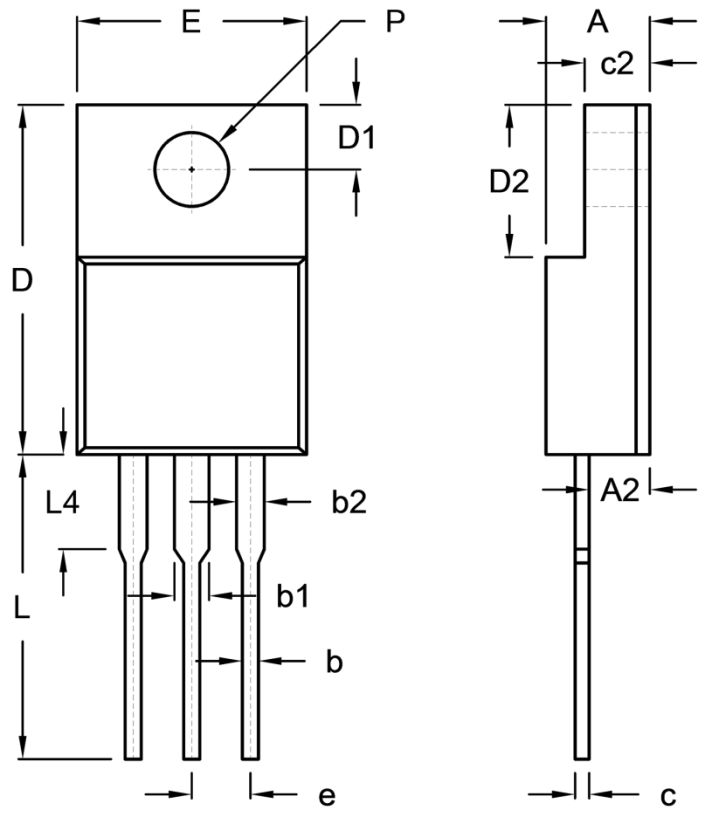

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	4.30	4.70	0.169	0.185
A2	2.30	2.96	0.091	0.117
b	0.50	0.90	0.020	0.035
b1	-	1.80	-	0.071
b2	0.95	1.45	0.037	0.057
c	0.46	0.76	0.018	0.030
c2	2.50	3.16	0.098	0.124
D	14.80	15.50	0.583	0.610
D1	2.40	3.20	0.094	0.126
D2	6.30	6.90	0.248	0.272
E	9.60	10.30	0.378	0.406
e	2.41	2.67	0.095	0.105
L	12.60	13.80	0.496	0.543
L4	-	4.10	-	0.161
P	3.00	3.40	0.118	0.134

MARKING DIAGRAM

P/N = Marking Code
G = Green Compound
YWW = Date Code
F = Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View TSF20L120C on WIN SOURCE
- Taiwan Semiconductor Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management