



**THE DATASHEET OF
DSSK28-0045B**





Power Schottky Rectifier with common cathode

$$I_{FAV} = 2 \times 15 \text{ A}$$

$$V_{RRM} = 45 \text{ V}$$

$$V_F = 0.43 \text{ V}$$

V_{RSM}	V_{RRM}	Type
V	V	
45	45	DSSK 28-0045B


**TO-220 AB
(B-Type)**


A = Anode, C = Cathode, TAB = Cathode

Symbol	Conditions	Maximum Ratings	Features
I_{FRMS}		35 A	<ul style="list-style-type: none"> • International standard package • Very low V_F • Extremely low switching losses • Low I_{RM}-values • Epoxy meets UL 94V-0
I_{FAV}	$T_C = 135^\circ\text{C}$; rectangular, $d = 0.5$	15 A	
I_{FAV}	$T_C = 135^\circ\text{C}$; rectangular, $d = 0.5$; per device	30 A	
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$; $t_p = 10 \text{ ms}$ (50 Hz), sine	320 A	
E_{AS}	$I_{AS} = 15 \text{ A}$; $L = 180 \mu\text{H}$; $T_{VJ} = 25^\circ\text{C}$; non repetitive	32 mJ	
I_{AR}	$V_A = 1.5 \cdot V_{RRM}$ typ.; $f = 10 \text{ kHz}$; repetitive	1.5 A	
$(dv/dt)_{cr}$		1000 V/ μs	Applications <ul style="list-style-type: none"> • Rectifiers in switch mode power supplies (SMPS) • Free wheeling diode in low voltage converters Advantages <ul style="list-style-type: none"> • High reliability circuit operation • Low voltage peaks for reduced protection circuits • Low noise switching • Low losses
T_{VJ}		-55...+150 $^\circ\text{C}$	
T_{VJM}		150 $^\circ\text{C}$	
T_{stg}		-55...+150 $^\circ\text{C}$	
P_{tot}	$T_C = 25^\circ\text{C}$	90 W	
M_d	mounting torque (Version B only)	0.4...0.6 Nm	
Weight	typical	2 g	

Symbol	Conditions	Characteristic Values	
		typ.	max.
I_R ①	$V_R = V_{RRM}$; $T_{VJ} = 25^\circ\text{C}$		20 mA
	$V_R = V_{RRM}$; $T_{VJ} = 100^\circ\text{C}$		100 mA
V_F	$I_F = 15 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$		0.43 V
	$I_F = 15 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$		0.48 V
	$I_F = 30 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$		0.60 V
R_{thJC}			1.4 K/W
R_{thCH}	0.5		K/W

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0 %
Data according to IEC 60747 and per diode unless otherwise specified.

Dimensions see Outlines.pdf

**Recommended replacement:
DSB30C45PB/DSB60C45PB**

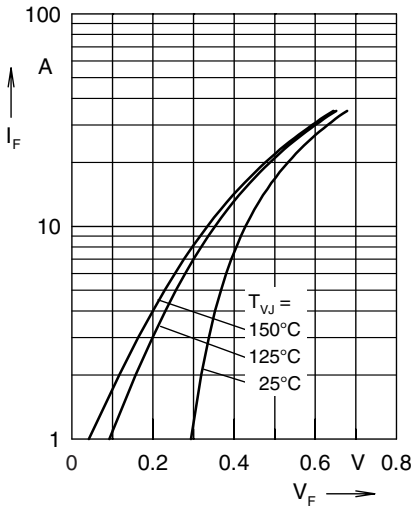


Fig. 1 Maximum forward voltage drop characteristics

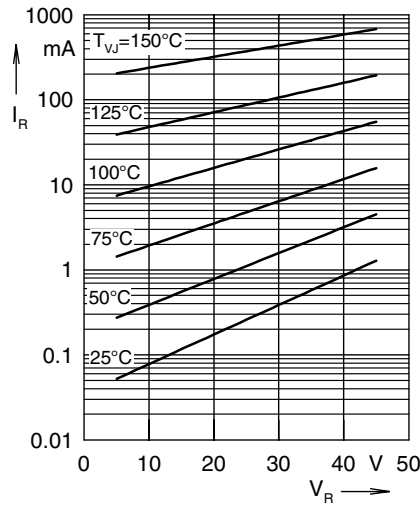


Fig. 2 Typ. value of reverse current I_R versus reverse voltage V_R

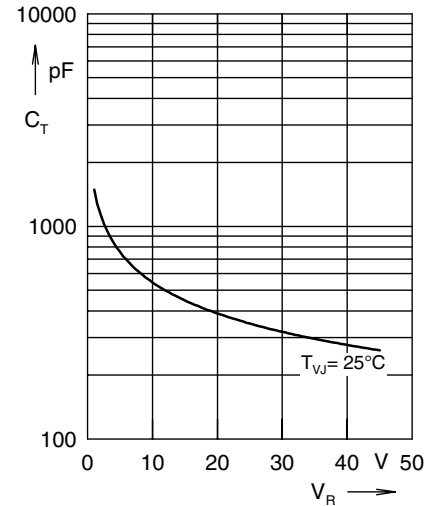


Fig. 3 Typ. junction capacitance C_T versus reverse voltage V_R

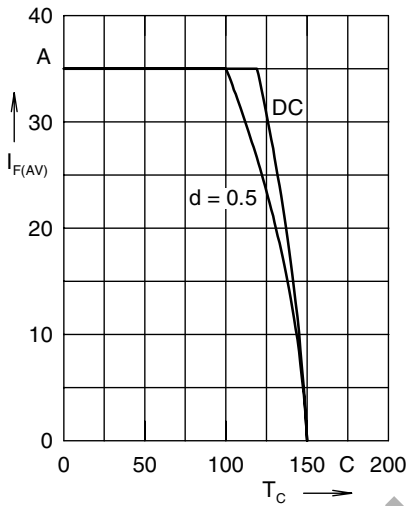


Fig. 4 Average forward current $I_{F(AV)}$ versus case temperature T_C

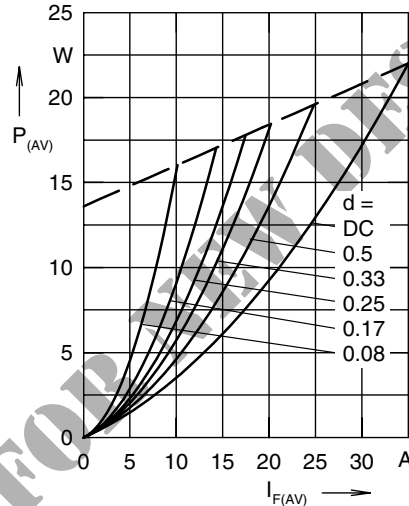


Fig. 5 Forward power loss characteristics

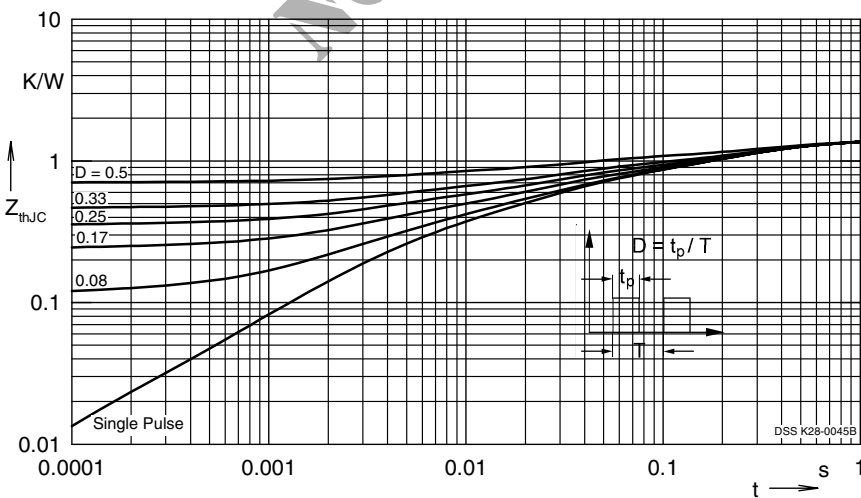




Fig. 6 Transient thermal impedance junction to case at various duty cycles

Note: All curves are per diode







IXYS reserves the right to change limits, Conditions and dimensions.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View DSSK28-0045B on WIN SOURCE](#)
-  [IXYS Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management