





ELECTRONICS, INC.  
 44 FARRAND STREET  
 BLOOMFIELD, NJ 07003  
 (973) 748-5089  
<http://www.nteinc.com>

## 1N4001 thru 1N4007 1.0A Standard Recovery Rectifier

**Features:**

- Diffused Junction
- Low Forward Voltage Drop
- High Current Capability
- High Surge Current Capability
- RoHS Compliant

**Mechanical Data:**

- Case: DO-41, Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.35 grams (approx.)
- Mounting Position: Any
- Marking: Type Number

**Absolute Maximum Ratings and Electrical Characteristics:** ( $T_A = +25^\circ\text{C}$ , unless otherwise specified)

Peak Repetitive Voltage,  $V_{RRM}$

Working Peak Reverse Voltage,  $V_{RWM}$

DC Blocking Voltage,  $V_R$

1N4001	50V
1N4002	100V
1N4003	200V
1N4004	400V
1N4005	600V
1N4006	800V
1N4007	1000V

RMS Reverse Voltage,  $V_{R(RMS)}$

1N4001	35V
1N4002	70V
1N4003	140V
1N4004	280V
1N4005	420V
1N4006	560V
1N4007	700V

Average Rectified Output Current ( $T_A = +75^\circ\text{C}$ , Note 1),  $I_O$  ..... 1.0A

Non-Repetitive Peak Forward Surge Current,  $I_{FSM}$

(8.3ms Single half sine-wave superimposed on rated load, JEDEC Method) ..... 30A

Forward Voltage ( $I_F = 1.0\text{A}$ ),  $V_{FM}$  ..... 1.0V

Peak Reverse Current ( $T_A = +25^\circ\text{C}$ ),  $I_{RM}$  ..... 5.0 $\mu\text{A}$

At Rated DC Blocking Voltage ( $T_A = +100^\circ\text{C}$ ) ..... 50 $\mu\text{A}$

Typical Junction Capacitance (Note 2),  $C_j$  ..... 15pF


Typical Thermal Resistance, Junction-to-Ambient,  $R_{thJA}$  ..... 50 $^\circ\text{C/W}$

Operating Temperature Range,  $T_j$  .....  $-65^\circ$  to  $+125^\circ\text{C}$

Storage Temperature Range,  $T_{STG}$  .....  $-65^\circ$  to  $+150^\circ\text{C}$

Note 1. Leads maintained at ambient temperature at a distance of 9.5mm from the case

Note 2. Measured at 1.0MHz and Applied Reverse Voltage of 4.0V D.C.

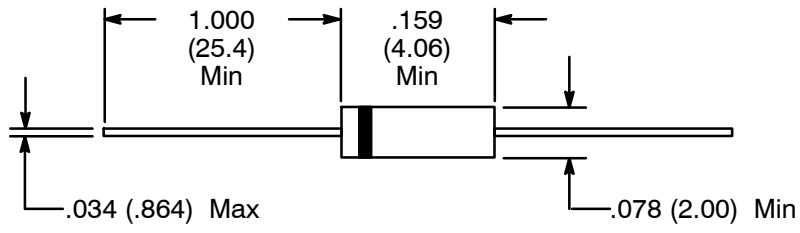

Color Band Denotes Cathode

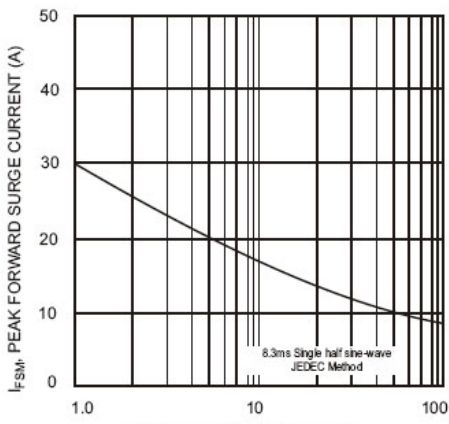


Fig. 3 Max Non-Repetitive Peak Fwd Surge Current

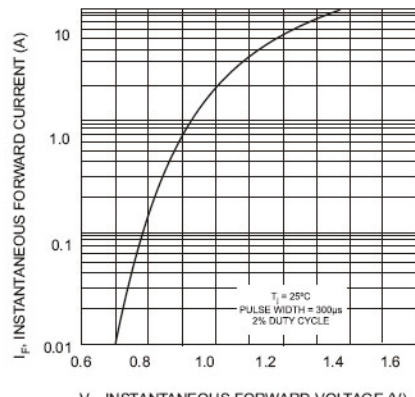


Fig. 2 Typical Forward Characteristics

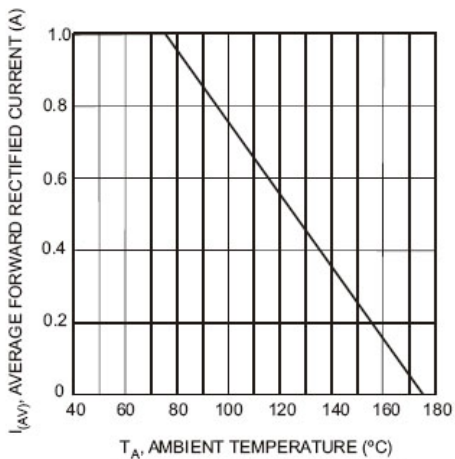


Fig. 1 Forward Current Derating Curve

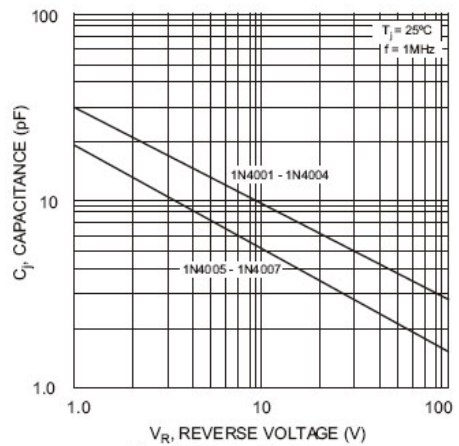



Fig. 4 Typical Junction Capacitance

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 1N4005 on WIN SOURCE](#)

 [NTE Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management