



**THE DATASHEET OF
FMS006-2310-0**



SPECIFICATIONS:

Insulation Resistance: 500M Ω min. at 500V DC
 Withstanding Voltage: 250Vrms for 1min
 Voltage Rating: 5Vrms DC
 Current Rating: 0.5A
 Contact Resistance: 100m Ω max. at 20mV max.
 Operating Temp.: - 55°C ~ +85°C
 Mating Cycle: 5,000 times

PART NUMBER:
FMS006-2310-0

Series Name

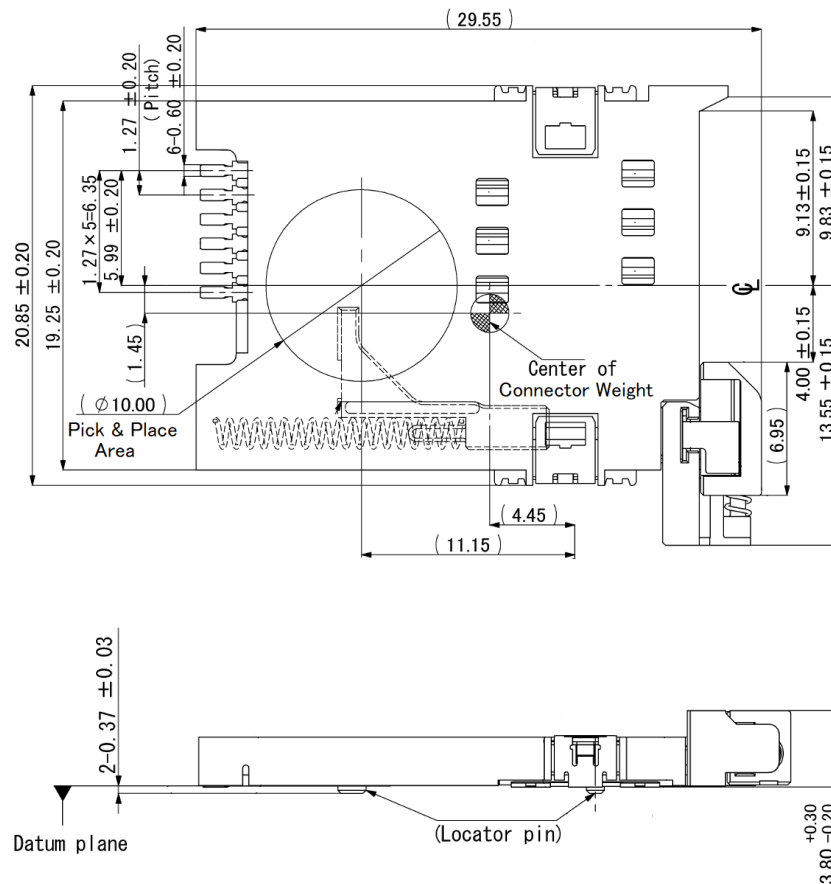
6 Pins SIM Card


MATERIALS AND FINISH:

- Contacts: Ni-Au/SnCu Alloy
- Insulator: LCP


FEATURES:

- High impact and vibration resistance
- One-action Push-Lock latch prevents SIM card ejection during vehicular operation
- RoHS and REACH Compliant

OUTLINE DIMENSIONS (mm):


Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View FMS006-2310-0 on WIN SOURCE](#)

 [Yamaichi Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management