



THE DATASHEET OF
ADP-2-1+



Power Splitter/Combiner

ADP-2-1+

2 Way-0° 50Ω 0.5 to 400 MHz



Generic photo used for illustration purposes only

CASE STYLE: CD636

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200
13"	500, 1000

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.5W max.
Internal Dissipation	0.125W max.

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

SUM PORT	1
PORT 1	3
PORT 2	4
GROUND	6
Externally connect together & isolate	2,5

Outline Drawing

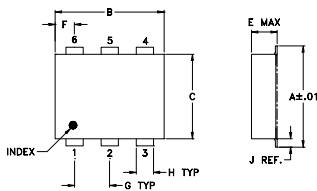

PCB Land Pattern




Suggested Layout, Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	
.272	.310	.220	.100	.162	.055	.100	
6.91	7.87	5.59	2.54	4.11	1.40	2.54	
H	J	K	L				wt
.030	.026	.065	.300				grams
0.76	0.66	1.65	7.62				0.25

Demo Board MCL P/N: TB-208 Suggested PCB Layout (PL-116)

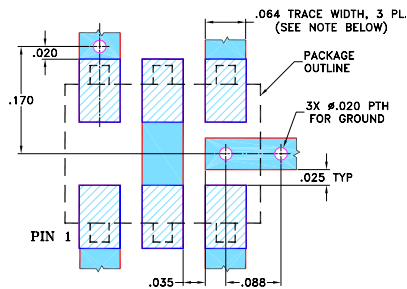

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low insertion loss, 0.3 dB typ.
- excellent amplitude unbalance, 0.10 dB typ.
- very good phase unbalance, 0.5 deg. typ.
- aqueous washable
- protected under U.S. Patent 6,133,525

Applications

- instrumentation
- VHF/UHF

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 3.0 dB			PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L	M	U	L	M	U	L	M	U	L	M	U
f _L -f _U	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Max.	Typ. Max.	Typ. Max.	Max.	Max.	Max.	Max.	Max.	Max.
0.5-400	25	20	25	20	25	20	0.2	0.4	0.3	0.6	0.5	1.0
							1.0	2.0	3.0	0.1	0.2	0.3

L = 0.5-5 MHz M = 5-200 MHz U = 200-400 MHz
 See Notes below.

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
0.50	3.13	3.13	0.00	30.12	0.03	1.06	1.08	1.08
10.00	3.13	3.13	0.00	34.46	0.05	1.03	1.01	1.01
30.00	3.16	3.16	0.00	33.18	0.04	1.03	1.01	1.01
60.00	3.18	3.19	0.01	31.23	0.04	1.04	1.01	1.01
90.00	3.21	3.21	0.00	29.53	0.11	1.05	1.01	1.01
120.00	3.21	3.22	0.01	28.15	0.07	1.06	1.02	1.02
160.00	3.26	3.25	0.01	26.67	0.12	1.08	1.02	1.02
200.00	3.28	3.27	0.01	25.63	0.08	1.09	1.03	1.03
240.00	3.29	3.27	0.01	24.87	0.14	1.09	1.04	1.04
280.00	3.34	3.35	0.00	24.45	0.19	1.09	1.05	1.05
320.00	3.33	3.32	0.00	24.36	0.26	1.08	1.07	1.07
340.00	3.37	3.37	0.01	24.50	0.29	1.07	1.08	1.08
360.00	3.38	3.37	0.00	24.69	0.24	1.07	1.09	1.09
380.00	3.42	3.42	0.00	24.97	0.28	1.05	1.10	1.10
400.00	3.41	3.41	0.00	25.39	0.37	1.04	1.11	1.12

1. Total Loss = Insertion Loss + 3dB splitter loss.

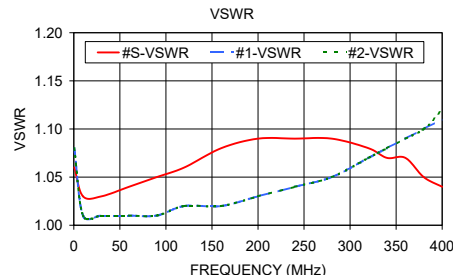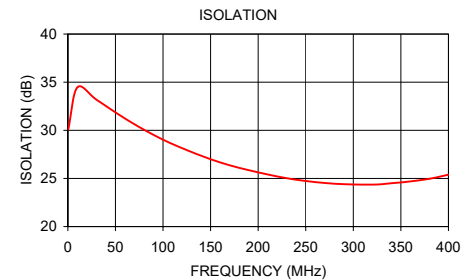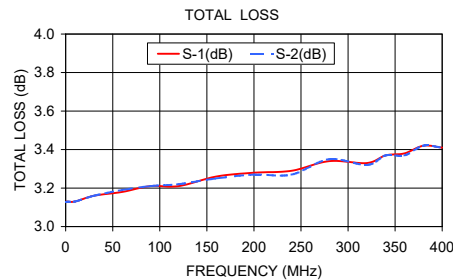

electrical schematic




Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View ADP-2-1+ on WIN SOURCE](#)

 [Mini-Circuits Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management