



**THE DATASHEET OF  
BX4286LNLT**



# 30MHz VDSL2 & Vectored VDSL Transformer



- POTS VDSL2 and Vectored Transformer
- Compatible with Broadcoms BCM65x00 chipset family integrating Vectoring Technology
- Designed to help Meet ITU K20e Level Testing Requirements
- EN60950-1 Functional Isolation Compliant - 250Vrms
- RoHS-6 Compliant SMD Product
- Available on Tape & Reel

Electrical Specifications @ 25°C - Operating Temperature -40°C to +85°C

Part Number	OCL Line (1-4) with (2-3) shorted 10kHz, 100mVrms ±10%	Turns Ratio (1-4): (8-5) with (2-3, 6-7) shorted 100kHz, 100mVrms ±2%	Leakage Inductance (1-4) with others shorted 100kHz, 100mVrms (uH, Max)	LB 12MHz (dB, Max)	LB 17MHz (dB, Max)	LB 30MHz (dB, Max)	THD 30kHz 3.0Vrms (dB, Min)	THD 30kHz 3.0Vrms (dB, Typical) @ -40°C
BX4285LNL	430	1.4:1	1.0	-45	-42	-30	-60	-60
BX4286LNL	100	1.4:1	1.0	-45	-42	-30	-60	-60
	DCR (1-4) with(2-3) shorted (OHMS Max)	DCR (8-5) with(6-7) shorted (OHMS Max)	C <sub>ww</sub> Line to Chip 100kHz, 100mVrms (pF Max)	IL 300kHz ~ 8MHz (dB Max)	IL 8MHz ~ 30MHz (dB Max)	Isolation Voltage (1-3) to (2-4) (Vrms, 6Sec)	Isolation Voltage Line to Chip (Vrms, 60Sec)	
BX4285LNL	1.0	1.0	35	0.5	3.5	750	1500	
BX4286LNL	1.0	1.0	35	0.5	3.5	750	1500	



**Notes:**

Add "T" suffix to part number to order on Tape & Reel i.e. BX4285LNLT, BX4286LNLT

## Mechanical

## Schematic

### BX4285LNL/BX4286LNL

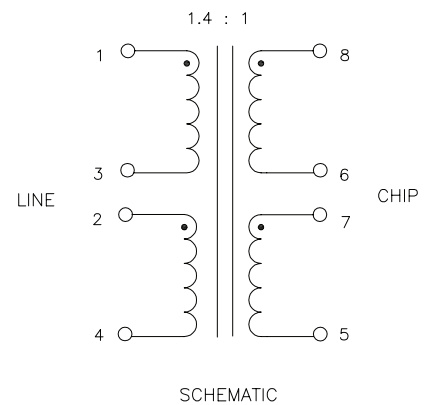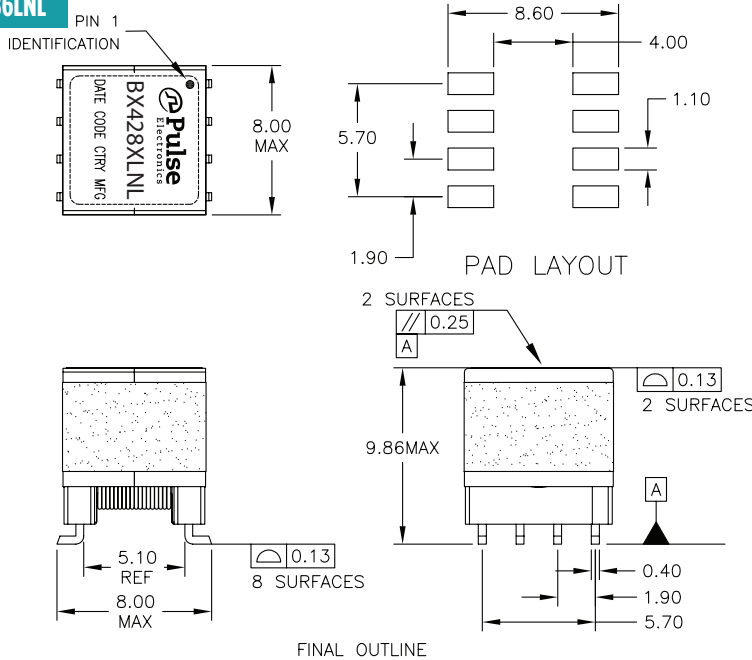

Weight .....1.4 grams  
 Tray .....100/tray  
 Tape & Reel.....300/tray  
**Dimensions:** mm  
 Unless otherwise specified,  
 all tolerances are ± 0.1

# 30MH VDSL2 & Vectored VDSL Transformer

---

## For More Information

### Pulse Worldwide Headquarters

12220 World Trade Drive  
San Diego, CA  
92128  
U.S.A.

Tel: 858 674 8100  
Fax: 858 674 8262

### Pulse Europe

Einsteinstrasse 1  
D-71083 Herren-  
berg  
Germany

Tel: 49 7032 78060  
Fax: 49 7032 7806 135

### Pulse China Headquarters

B402, Shenzhen Academy of  
Aerospace Technol-  
ogy Bldg.  
10th Kejinan Road  
High-Tech Zone  
Nanshan District  
Shenzen, PR China  
518057  
Tel: 86 755 33966678  
Fax: 86 755 33966700

### Pulse North China

Room 2704/2705  
Super Ocean Finance  
Ctr.  
2067 Yan An Road  
West  
Shanghai 200336  
China

Tel: 86 21 62787060  
Fax: 86 2162786973

### Pulse South Asia

135 Joo Seng Road  
#03-02  
PM Industrial Bldg.  
Singapore 368363

Tel: 65 6287 8998  
Fax: 65 6287 8998

### Pulse North Asia

3F, No. 198  
Zhongyuan Road  
Zhongli City  
Taoyuan County 320  
Taiwan R. O. C.

Tel: 886 3 4356768  
Fax: 886 3 4356823 (Pulse)  
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2014. Pulse Electronics, Inc. All rights reserved.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View BX4286LNL](#) on WIN SOURCE

 [Pulse Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management