





MMIC SURFACE MOUNT


# Power Splitter/Combiner

GP2Y+

2 Way-0° 50Ω 1600 to 3300 MHz

## FEATURES

- Wide bandwidth, 1600 to 3300 MHz
- Excellent isolation, 24 dB typ.
- Excellent amplitude unbalance, 0.02 dB typ.
- Good phase unbalance, 0.3 deg. typ.
- Small size, 0.118"x0.118"x0.035"
- High ESD level
- Aqueous washable



Generic photo used for illustration purposes only

CASE STYLE: DQ1225

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

## APPLICATIONS

- WCDMA
- DCS
- Radar
- Navigation
- Instrumentation
- Korea PCS
- WiMax

## ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Frequency Range		1600		3300	MHz
Insertion Loss* (above 3.0 dB)	1600-3300	—	0.8	1.5	dB
Isolation	1600-3300	17	24	—	dB
Amplitude Unbalance	1600-3300	—	—	0.2	dB
Phase Unbalance	1600-3300	—	—	4.0	deg.
VSWR (Port S)	1600-3300	—	1.2	—	:1
VSWR (Ports 1,2)	1600-3300	—	1.2	—	

\* De-embedded from demo board loss.

## MAXIMUM RATINGS

Parameter	Ratings
Operating temperature	-40°C to 85°C
Storage temperature	-65°C to 150°C
Power Input (as a splitter)	1.5W max.
Internal Dissipation	0.75W max.

Permanent damage may occur if any of these limits are exceeded.

## ELECTRICAL SCHEMATIC



REV. D  
ECO-015315  
GP2Y+  
MCL NY  
220912






### PAD CONNECTIONS

SUM PORT	2
PORT 1	7
PORT 2	9
GROUND	1,3,4,5,6,8,10,11,12, paddle

### DEMO BOARD MCL P/N: TB-453-GP2Y+ SUGGESTED PCB LAYOUT (PL-282)

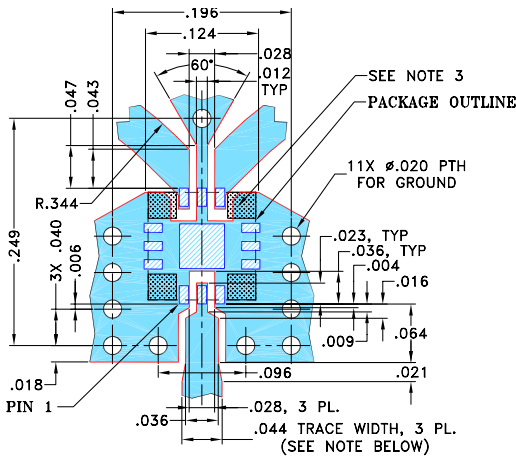


#### NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. SIGNAL TRACES ARE NOT ALLOWED INSIDE HATCHED AREAS (APPROX. .030 X .030) AT 4 PLACES AS SHOWN.


- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### PRODUCT MARKING

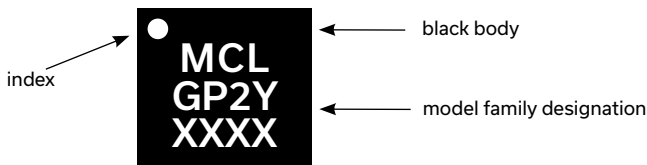


Marking may contain other features or characters for internal lot control

### OUTLINE DRAWING

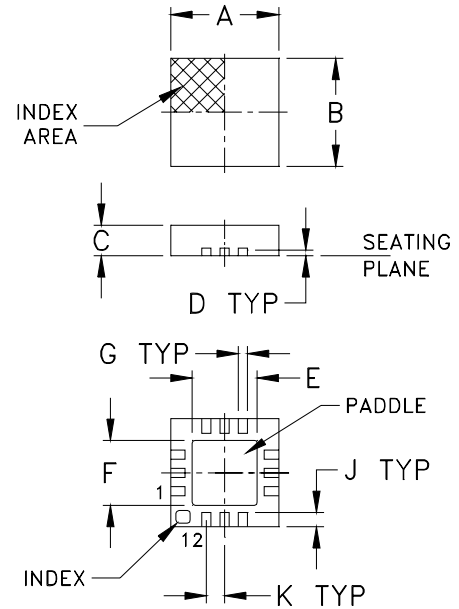

### PCB Land Pattern

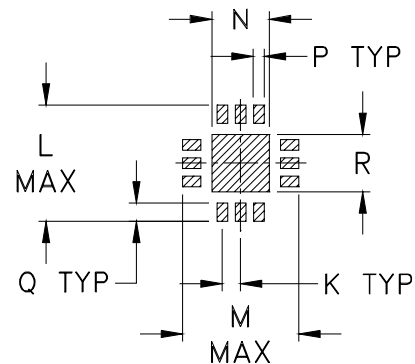

Suggested Layout,  
Tolerance to be within ±.002

### OUTLINE DIMENSIONS (Inch/mm)

A	B	C	D	E	F	G	H	J
.118	.118	.035	.008	.057	.057	.009	---	.016
3.00	3.00	0.89	0.20	1.45	1.45	0.23	---	0.41
K	L	M	N	P	Q	R		wt
.020	.127	.127	.049	.010	.020	.049		grams
0.51	3.23	3.23	1.24	0.25	0.51	1.24		0.02

### TAPE & REEL INFORMATION: F66



MMIC SURFACE MOUNT

# Power Splitter/Combiner

GP2Y+


2 Way-0° 50Ω 1600 to 3300 MHz

### TYPICAL PERFORMANCE DATA AND CHARTS


Frequency (MHz)	Total Loss <sup>1</sup> (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
1600.00	3.99	3.98	0.01	26.03	0.38	1.26	1.19	1.21
1780.00	3.77	3.77	0.00	28.31	0.44	1.07	1.13	1.14
1870.00	3.74	3.74	0.00	24.68	0.47	1.16	1.14	1.15
1960.00	3.72	3.73	0.01	22.92	0.47	1.24	1.15	1.16
2140.00	3.70	3.72	0.02	21.93	0.54	1.31	1.17	1.19
2230.00	3.69	3.71	0.02	22.14	0.58	1.32	1.17	1.19
2320.00	3.67	3.69	0.02	22.75	0.57	1.30	1.16	1.17
2490.00	3.64	3.66	0.02	24.97	0.59	1.23	1.12	1.15
2580.00	3.63	3.64	0.01	26.91	0.55	1.18	1.10	1.12
2760.00	3.62	3.63	0.01	33.79	0.51	1.08	1.07	1.09
2940.00	3.64	3.65	0.00	33.00	0.45	1.10	1.09	1.08
3030.00	3.67	3.67	0.00	28.80	0.45	1.15	1.13	1.12
3120.00	3.70	3.70	0.00	25.78	0.45	1.21	1.17	1.15
3210.00	3.73	3.73	0.00	23.47	0.46	1.29	1.20	1.19
3300.00	3.77	3.78	0.01	21.67	0.49	1.36	1.24	1.24

1. Total Loss = Insertion Loss + 3dB splitter loss.


GP2X+ TOTAL LOSS

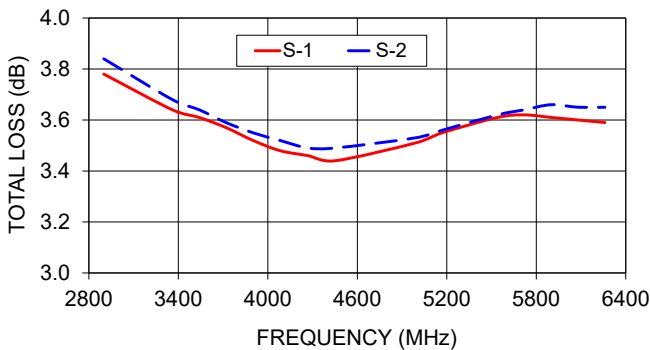

GP2X+ ISOLATION

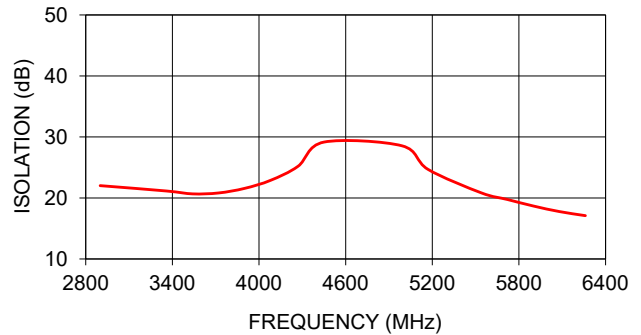

GP2X+ VSWR

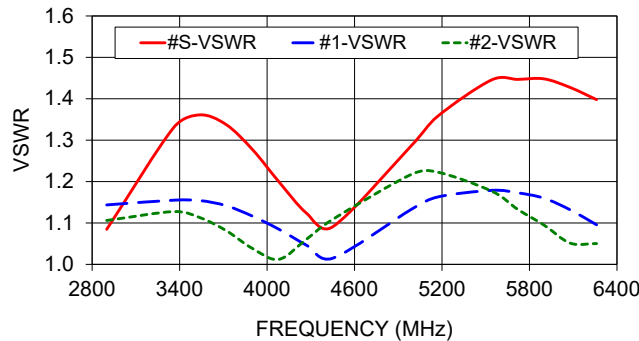

### ESD RATING

Human Body Model (HBM): Class 1A (250 to < 500V) in accordance with ANSI/ESD STM 5.1 - 2001

Machine Model (MM): Class M2 (100V to < 250V) in accordance with ANSI/ESD STM 5.2 - 1999



#### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View GP2Y+ on WIN SOURCE](#)
-  [Mini-Circuits Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management