



THE DATASHEET OF SYM-25DLHW+



Surface Mount Frequency Mixer

SYM-25DLHW+ SYM-25DLHW

Level 10 (LO Power +10 dBm) 40 to 2500 MHz



Generic photo used for illustration purposes only

CASE STYLE: TTT167

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200
13"	500

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO	2
RF	1
IF	3
GROUND	4,5,6

Features

- wide bandwidth, 40 to 2500 MHz
- low conversion loss, 6.3 dB typ.
- good L-R isolation, 40 dB typ.
- IF response to DC

Applications

- cellular
- PCS
- satellite distribution

Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS* (dB)	LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)						IP3 at center band (dBm)	
		Mid-Band		Total Range		L	M	U	L	M	U				
40-2500	DC-1000*	6.3	.10	7.5	8.8	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	22

1 dB COMP: +5 dBm typ.

*Conversion loss increases up to 6 dB higher as IF frequency decreases from 5MHz to DC.


L = low range [f_L to 10 f_L]

m = mid band [$2f_L$ to $f_U/2$]

M = mid range [$10f_L$ to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

Outline Drawing

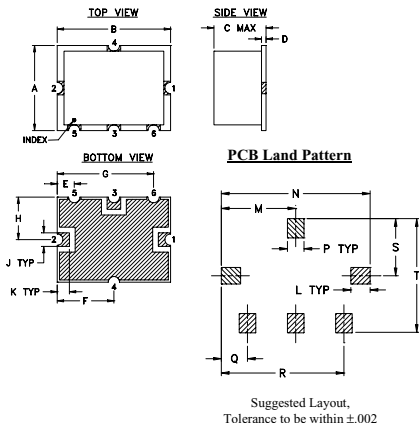


Suggested Layout, Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K
.38	.50	.23	.020	.075	.250	.425	.187	.050	.050
9.65	12.70	5.84	0.51	1.91	6.35	10.80	4.75	1.27	1.27
L	M	N	P	Q	R	S	T	wt.	
.070	.270	.540	.060	.095	.445	.208	.415	grams	
1.78	6.86	13.72	1.52	2.41	11.30	5.28	10.54	0.8	

Demo Board MCL P/N: TB-12 Suggested PCB Layout (PL-079)

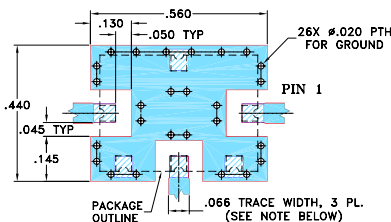

NOTE:

1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. THE USE OF SOLDER MASK OVER THE GROUND AREA UNDER THE UNIT AS SHOWN IS RECOMMENDED TO PREVENT POTENTIAL SHORTING. IF USER CHOOSES TO EXPOSE METAL UNDER THE ENTIRE UNIT GROUND PAD FOR IMPROVED GROUNDING, IT IS RECOMMENDED A SOLDER MASK DAM BE APPLIED AROUND EACH GROUND PAD TO ENSURE FILLET AND CONNECTION AT GROUND PADS.
3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
 - DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER). SEE NOTE 2.
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp




www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com







Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm
30.26	60.26	6.28	60.74	38.48	1.12	1.57
110.92	140.92	6.34	62.91	37.88	1.15	1.50
211.74	241.74	6.35	59.37	37.88	1.20	1.48
312.56	342.56	6.41	55.65	38.03	1.27	1.44
413.38	443.38	6.40	53.27	38.02	1.35	1.39
514.20	544.20	6.43	51.22	37.46	1.42	1.34
615.02	645.02	6.45	49.78	36.59	1.51	1.29
816.66	846.66	6.57	44.86	34.93	1.64	1.18
1018.30	1048.30	6.70	41.69	34.07	1.77	1.08
1240.10	1270.10	6.85	38.25	33.62	1.80	1.09
1401.41	1431.41	7.07	37.62	34.60	1.78	1.22
1502.23	1532.23	7.21	38.08	36.08	1.78	1.31
1643.38	1673.38	7.45	39.08	38.33	1.80	1.43
1804.69	1834.69	7.80	40.55	46.51	1.81	1.57
1905.51	1935.51	8.02	40.98	50.46	1.81	1.65
2006.33	2036.33	8.24	40.99	42.85	1.78	1.74
2207.97	2237.97	8.36	38.87	34.59	1.65	1.89
2308.79	2338.79	8.33	37.86	32.15	1.61	1.96
2409.61	2439.61	8.32	36.39	30.29	1.57	2.00
2510.43	2540.43	8.28	34.69	28.65	1.56	2.04

Electrical Schematic

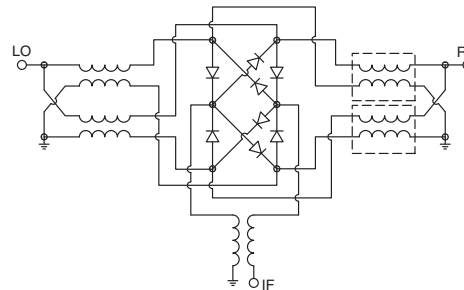

Performance Charts

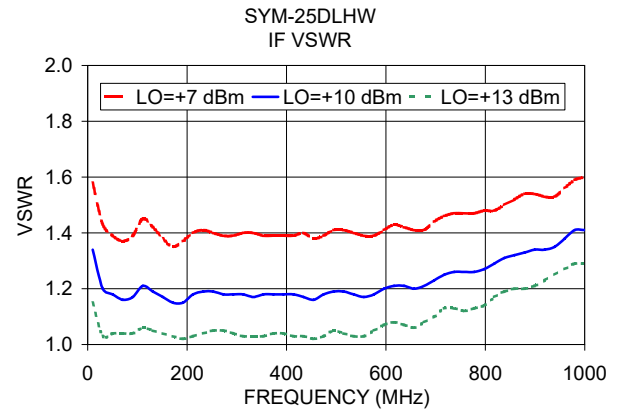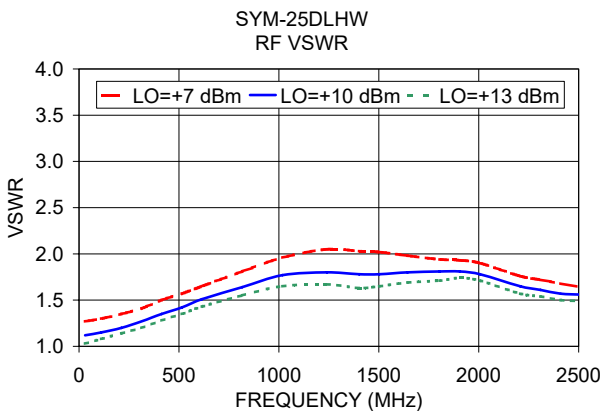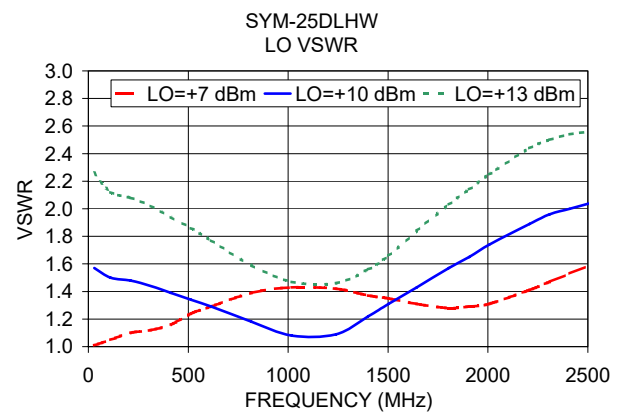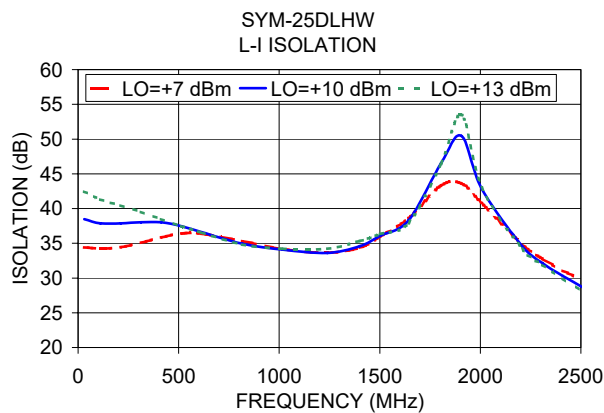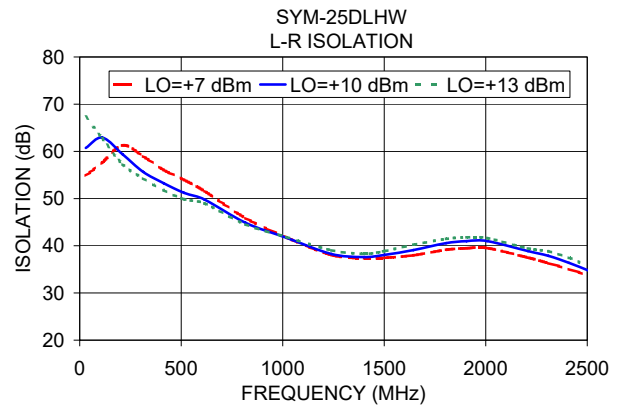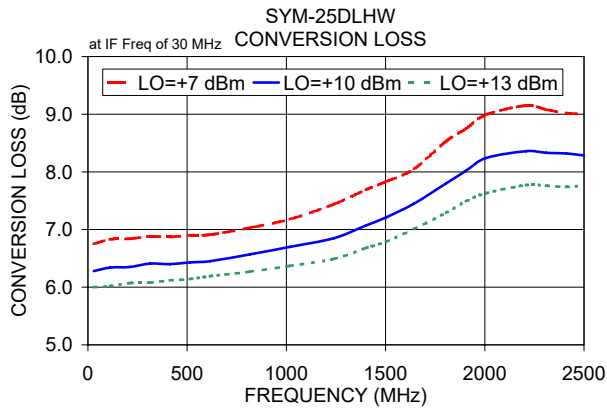

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SYM-25DLHW+ on WIN SOURCE](#)

 [Mini-Circuits Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management