



THE DATASHEET OF TCD-9-1WX+





FEATURES

- Wideband, 5 to 2000 MHz
- Low mainline loss, 1.2 dB typ. (5-1000 MHz)
- Aqueous washable
- Leads for excellent solderability
- Protected by US Patent 6,140,887



Generic photo used for illustration purposes only

CASE STYLE: DB1627

APPLICATIONS

- GPS
- Cellular
- Satellite distribution
- CABLE TV

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range	—	5	—	2000	MHz
Mainline Loss ¹ (above theoretical 0.1 dB)	5-50	—	1.2	2.1	dB
	50-500	—	1.2	1.8	
	500-1000	—	1.5	2.1	
	1000-2000	—	2.5	—	
Coupling	5-1000	—	8.9±0.5	—	dB
	1000-2000	—	8.9±0.5	—	
Coupling Flatness (±)	5-2000	—	±0.6	—	
Directivity	5-50	17	21	—	dB
	50-500	13	17	—	
	500-1000	10	13	—	
	1000-2000	—	10	—	
VSWR	5-1000	—	1.30	—	:1
	1000-2000	—	1.60	—	
Input Power	5-1000	—	—	0.5	W
	1000-2000	—	—	1.0	


1. Mainline loss includes theoretical power loss at coupled port.

MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C*
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.
* Case temperature is defined as temperature on ground leads.

ELECTRICAL SCHEMATIC



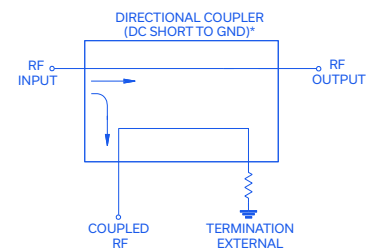


*Electrical schematic is for Directional coupler with internal transformer(s) and external termination



TYPICAL PERFORMANCE DATA

Frequency (MHz)	Mainline Loss (dB)		Coupling (dB)	Directivity (dB)	Return Loss (dB)		
	In-Out	In-Cpl			In	Out	Cpl
5.00	1.11	8.96	21.65	19.14	27.81	18.92	
200.00	1.14	8.97	20.18	20.84	30.26	20.66	
600.00	1.26	8.67	15.41	21.16	22.87	20.18	
800.00	1.38	8.61	13.30	20.11	22.87	18.90	
1000.00	1.54	8.48	11.72	18.37	22.07	17.30	
1200.00	1.74	8.57	10.31	16.42	21.82	15.67	
1400.00	2.04	8.57	9.19	14.49	22.16	14.29	
1600.00	2.32	8.61	8.42	12.72	21.46	12.97	
1800.00	2.72	8.75	7.63	11.17	23.19	11.93	
2000.00	3.07	8.76	7.28	9.96	22.33	10.99	

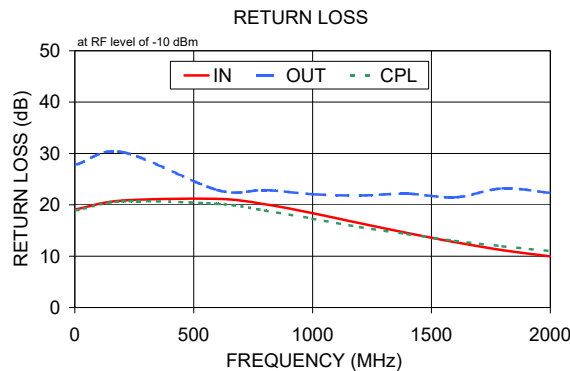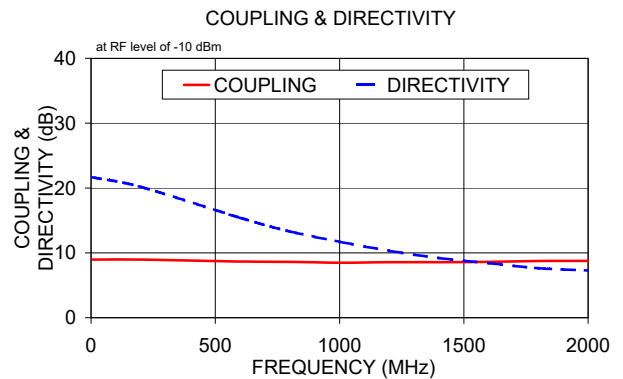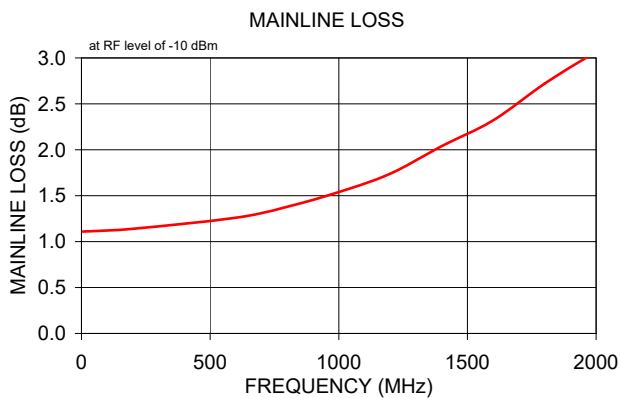

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View TCD-9-1WX+](#) on WIN SOURCE

 [Mini-Circuits](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management