



THE DATASHEET OF BPF-B48+



Bandpass Filter

BPF-B48+

50Ω 47 to 49 MHz

Maximum Ratings


| | |
|-----------------------|----------------|
| Operating Temperature | -40°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| RF Power Input | 0.15W Max. |

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

| | |
|--------|------------|
| INPUT | 1 |
| OUTPUT | 2 |
| GROUND | 3, 4, 5, 6 |

Outline Drawing

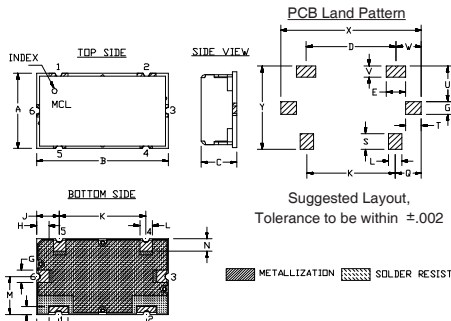


Outline Dimensions (inch/mm)

| | | | | | | | | | | | |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|---|
| A | B | C | D | E | F | G | H | J | K | L | M |
| .472" | .826" | .220" | .551" | .118" | .047" | .078" | .142" | .543" | .078" | .236" | |
| 11.99 | 20.98 | 5.59 | 14.00 | 3.00 | 1.19 | 1.98 | 3.61 | 13.79 | 1.98 | 5.99 | |
| N | P | Q | S | T | U | V | W | X | Y | wt | |
| .079" | .138" | .162" | .098" | .096" | .217" | .067" | .157" | .866" | .512" | grams | |
| 2.01 | 3.51 | 4.11 | 2.49 | 2.44 | 5.51 | 1.70 | 3.99 | 22.00 | 13.00 | 6.0 | |

Note: Please refer to case style drawing for details

Demo Board MCL P/N: TB-400+ Suggested PCB Layout (PL-247)

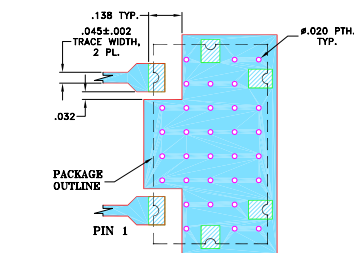

- NOTES:
- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025"±.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Features

- High rejection
- Good VSWR, 1.2:1 typ @ passband
- Shielded case
- Aqueous washable

Applications

- Military
- Lab
- Harmonic rejection
- Transmitters/receivers



Generic photo used for illustration purposes only
CASE STYLE: HZ1198


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Bandpass Filter Electrical Specifications (T_{AMB} = 25°C)

| CENTER FREQ. (MHz) | PASSBAND (MHz) (Loss < 4dB) | STOPBANDS (MHz) | | | | VSWR (:1) | | |
|--------------------|---------------------------------|-----------------|----------------|----------------|----------------|-----------|------|----------|
| | | Loss > 20dB | | Loss > 40dB | | Passband | | Stopband |
| F _c | F ₁ - F ₂ | F ₃ | F ₄ | F ₅ | F ₆ | Typ. | Max. | Typ. |
| 48 | 47 - 49 | 41 | 56 | 37 | 64 - 2400 | 1.2 | 1.5 | 20 |

Typical Frequency Response



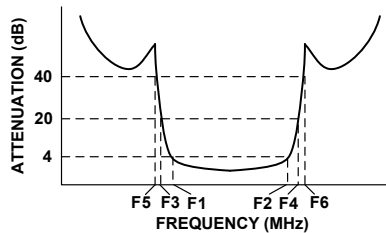


Functional Schematic

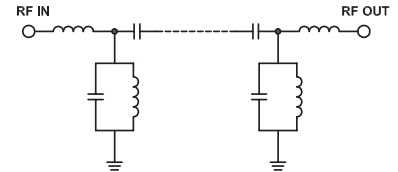

Typical Performance Data at 25°C

| Frequency (MHz) | Insertion Loss (dB) | | Return Loss (dB) | Frequency (MHz) | Group Delay (nsec) |
|-----------------|---------------------|----------|------------------|-----------------|--------------------|
| | \bar{x} | σ | | | |
| 0.5 | 78.03 | 4.46 | 1.85 | 46.00 | 167.71 |
| 37.0 | 49.10 | 0.39 | 0.12 | 46.25 | 161.42 |
| 41.0 | 30.99 | 0.52 | 0.47 | 46.50 | 154.52 |
| 44.0 | 12.42 | 0.63 | 2.64 | 47.00 | 142.38 |
| 45.0 | 6.45 | 0.44 | 6.93 | 47.25 | 137.66 |
| 46.0 | 3.43 | 0.15 | 19.20 | 47.50 | 134.06 |
| 47.0 | 2.73 | 0.03 | 17.62 | 47.75 | 131.25 |
| 47.5 | 2.67 | 0.02 | 18.05 | 48.00 | 129.14 |
| 48.0 | 2.68 | 0.02 | 20.70 | 48.25 | 127.37 |
| 48.5 | 2.72 | 0.03 | 26.66 | 48.50 | 126.62 |
| 49.0 | 2.77 | 0.03 | 32.10 | 48.75 | 126.57 |
| 51.0 | 4.54 | 0.37 | 15.56 | 49.00 | 127.40 |
| 52.0 | 9.10 | 0.73 | 6.47 | 49.25 | 129.07 |
| 53.0 | 14.81 | 0.76 | 3.42 | 49.50 | 132.10 |
| 56.0 | 28.44 | 0.55 | 1.32 | 49.75 | 136.34 |
| 64.0 | 48.44 | 0.36 | 0.45 | 50.00 | 142.10 |
| 500.0 | 80.99 | 2.23 | 0.03 | 50.25 | 148.26 |
| 2400.0 | 47.70 | 0.53 | 0.47 | 50.50 | 154.45 |

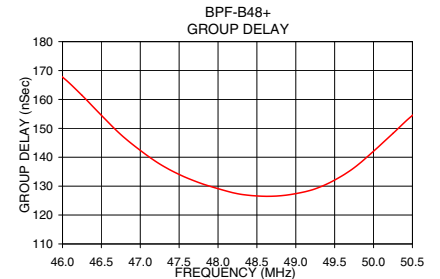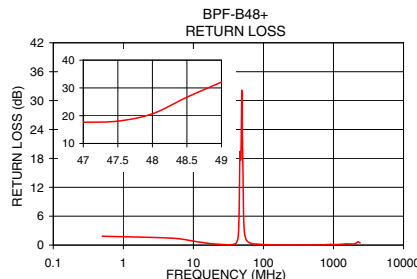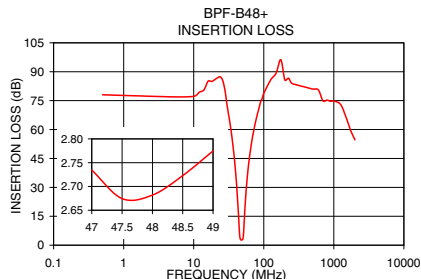

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View BPF-B48+](#) on WIN SOURCE

 [Mini-Circuits](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management