





**THE DATASHEET OF
06FMN-SMT-A-TF(LF)(SN)**





FMN CONNECTOR

1.0mm pitch/Connectors for FFC

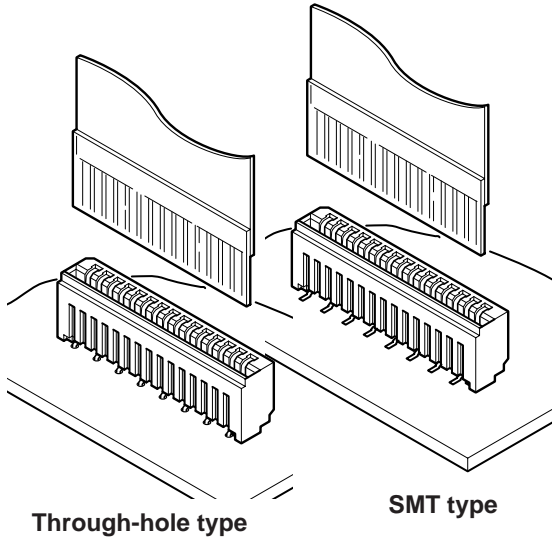

Through-hole type

SMT type

- Compact
- Low insertion force
- Both through-hole and SMT types are available
- Embossed tape for automatic mounting

Specifications

- Current rating: 0.5 A DC
 - Voltage rating: 50 V DC
 - Temperature range: -25°C to +85°C
(including temperature rise in applying electrical current)
 - Contact resistance: Initial value/ 30 mΩ max.
After environmental tests/ 50 mΩ max.
 - Insulation resistance: 500 MΩ min.
 - Withstanding voltage: 500 VAC/minute
 - Applicable FFC: Conductor pitch/ 1.0 mm
Conductor width/ 0.7 mm
Mating part thickness/ 0.3 ± 0.05 mm
 - Applicable PC board thickness: 1.6 mm
- Note: FFC to be actually used should be checked for applicability.
- * Refer to "General Instruction and Notice when using Terminals and Connectors" at the end of this catalog.
 - * Contact JST for details.
 - * Compliant with RoHS.

Standards

Recognized E60389


Certified LR20812

PC board layout and Assembly layout



<Through-hole type>

Top entry type

Normal type

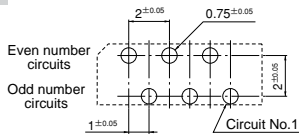


Reverse type


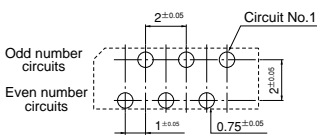


Side entry type

Normal type



Reverse type

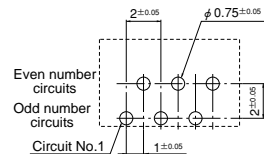


<SMT type>


Top entry type

<In-line>

Normal type




Reverse type





<Staggered>



Normal type



Reverse type

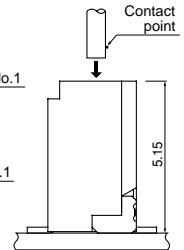

Side entry type




- Note:
1. The above figure is the figure viewed from the connector mounting side.
 2. Tolerances are non-cumulative: ±0.05 mm for all centers.
 3. Hole dimensions differ according to the type of PC board and piercing method. The dimensions above should serve as a guideline. Contact JST for details.

- Note:
1. The above figure is the figure viewed from the connector mounting side.
 2. Tolerances are non-cumulative: ±0.05 mm for all centers.
 3. The dimensions above should serve as a guideline. Contact JST for details.


FMN CONNECTOR

Lead section dimensions of FFC

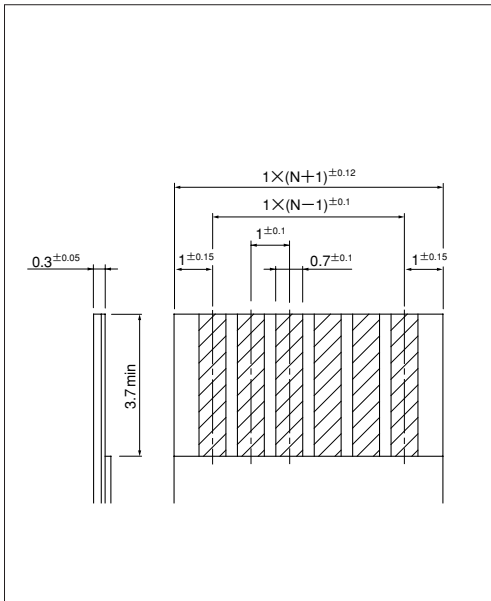

Note: N --- Number of circuits

Through-hole type Connector

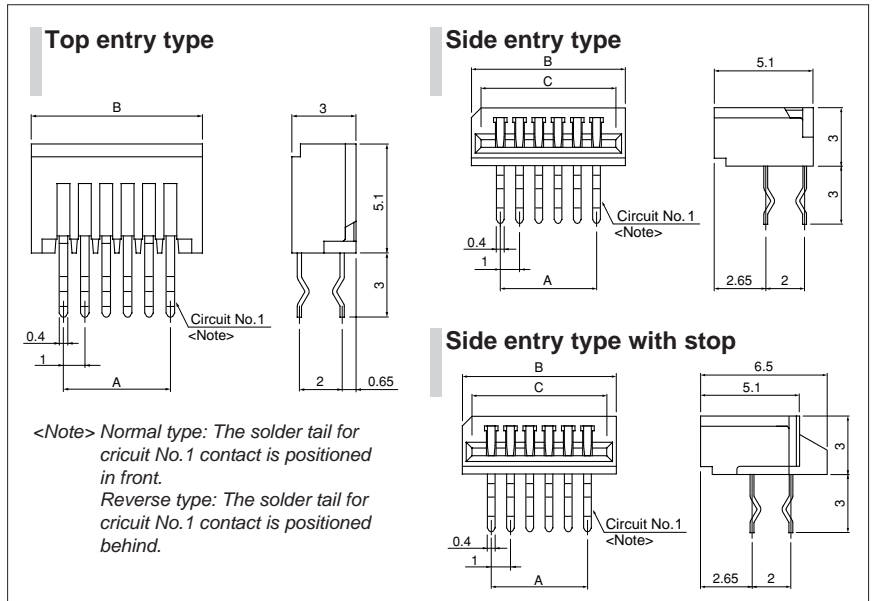

| Circuits | Model No. | | | | | | Dimensions (mm) | | | Q'ty/box | | |
|----------|----------------|--------------|-----------------|--------------|---------------------------|---------------|-----------------|------|------|----------------|-----------------|---------------------------|
| | Top entry type | | Side entry type | | Side entry type with stop | | A | B | C | Top entry type | Side entry type | Side entry type with stop |
| | Normal type | Reverse type | Normal type | Reverse type | Normal type | Reverse type | | | | | | |
| 4 | 04FMN-BTK-A | 04FMN-BTRK-A | 04FMN-STK-A | 04FMN-STRK-A | 04FMN-SSTK-A | 04FMN-SSTRK-A | 3.0 | 6.0 | 5.0 | 3,600 | 2,160 | 2,520 |
| 5 | 05FMN-BTK-A | 05FMN-BTRK-A | 05FMN-STK-A | 05FMN-STRK-A | 05FMN-SSTK-A | 05FMN-SSTRK-A | 4.0 | 7.0 | 6.0 | 3,100 | 1,860 | 2,170 |
| 6 | 06FMN-BTK-A | 06FMN-BTRK-A | 06FMN-STK-A | 06FMN-STRK-A | 06FMN-SSTK-A | 06FMN-SSTRK-A | 5.0 | 8.0 | 7.0 | 2,700 | 1,620 | 1,890 |
| 7 | 07FMN-BTK-A | 07FMN-BTRK-A | 07FMN-STK-A | 07FMN-STRK-A | 07FMN-SSTK-A | 07FMN-SSTRK-A | 6.0 | 9.0 | 8.0 | 2,400 | 1,440 | 1,680 |
| 8 | 08FMN-BTK-A | 08FMN-BTRK-A | 08FMN-STK-A | 08FMN-STRK-A | 08FMN-SSTK-A | 08FMN-SSTRK-A | 7.0 | 10.0 | 9.0 | 2,100 | 1,260 | 1,470 |
| 9 | 09FMN-BTK-A | 09FMN-BTRK-A | 09FMN-STK-A | 09FMN-STRK-A | 09FMN-SSTK-A | 09FMN-SSTRK-A | 8.0 | 11.0 | 10.0 | 1,900 | 1,140 | 1,330 |
| 10 | 10FMN-BTK-A | 10FMN-BTRK-A | 10FMN-STK-A | 10FMN-STRK-A | 10FMN-SSTK-A | 10FMN-SSTRK-A | 9.0 | 12.0 | 11.0 | 1,800 | 1,080 | 1,260 |
| 11 | 11FMN-BTK-A | 11FMN-BTRK-A | 11FMN-STK-A | 11FMN-STRK-A | 11FMN-SSTK-A | 11FMN-SSTRK-A | 10.0 | 13.0 | 12.0 | 1,600 | 960 | 1,120 |
| 12 | 12FMN-BTK-A | 12FMN-BTRK-A | 12FMN-STK-A | 12FMN-STRK-A | 12FMN-SSTK-A | 12FMN-SSTRK-A | 11.0 | 14.0 | 13.0 | 1,500 | 900 | 1,050 |
| 13 | 13FMN-BTK-A | 13FMN-BTRK-A | 13FMN-STK-A | 13FMN-STRK-A | 13FMN-SSTK-A | 13FMN-SSTRK-A | 12.0 | 15.0 | 14.0 | 1,400 | 840 | 980 |
| 14 | 14FMN-BTK-A | 14FMN-BTRK-A | 14FMN-STK-A | 14FMN-STRK-A | 14FMN-SSTK-A | 14FMN-SSTRK-A | 13.0 | 16.0 | 15.0 | 1,300 | 780 | 910 |
| 15 | 15FMN-BTK-A | 15FMN-BTRK-A | 15FMN-STK-A | 15FMN-STRK-A | 15FMN-SSTK-A | 15FMN-SSTRK-A | 14.0 | 17.0 | 16.0 | 1,200 | 720 | 840 |
| 16 | 16FMN-BTK-A | 16FMN-BTRK-A | 16FMN-STK-A | 16FMN-STRK-A | 16FMN-SSTK-A | 16FMN-SSTRK-A | 15.0 | 18.0 | 17.0 | 1,200 | 720 | 840 |
| 17 | 17FMN-BTK-A | 17FMN-BTRK-A | 17FMN-STK-A | 17FMN-STRK-A | 17FMN-SSTK-A | 17FMN-SSTRK-A | 16.0 | 19.0 | 18.0 | 1,100 | 660 | 770 |
| 18 | 18FMN-BTK-A | 18FMN-BTRK-A | 18FMN-STK-A | 18FMN-STRK-A | 18FMN-SSTK-A | 18FMN-SSTRK-A | 17.0 | 20.0 | 19.0 | 1,000 | 600 | 700 |
| 19 | 19FMN-BTK-A | 19FMN-BTRK-A | 19FMN-STK-A | 19FMN-STRK-A | 19FMN-SSTK-A | 19FMN-SSTRK-A | 18.0 | 21.0 | 20.0 | 1,000 | 600 | 700 |
| 20 | 20FMN-BTK-A | 20FMN-BTRK-A | 20FMN-STK-A | 20FMN-STRK-A | 20FMN-SSTK-A | 20FMN-SSTRK-A | 19.0 | 22.0 | 21.0 | 900 | 540 | 630 |
| 21 | 21FMN-BTK-A | 21FMN-BTRK-A | 21FMN-STK-A | 21FMN-STRK-A | 21FMN-SSTK-A | 21FMN-SSTRK-A | 20.0 | 23.0 | 22.0 | 900 | 540 | 630 |
| 22 | 22FMN-BTK-A | 22FMN-BTRK-A | 22FMN-STK-A | 22FMN-STRK-A | 22FMN-SSTK-A | 22FMN-SSTRK-A | 21.0 | 24.0 | 23.0 | 900 | 540 | 630 |
| 23 | 23FMN-BTK-A | 23FMN-BTRK-A | 23FMN-STK-A | 23FMN-STRK-A | 23FMN-SSTK-A | 23FMN-SSTRK-A | 22.0 | 25.0 | 24.0 | 800 | 480 | 560 |
| 24 | 24FMN-BTK-A | 24FMN-BTRK-A | 24FMN-STK-A | 24FMN-STRK-A | 24FMN-SSTK-A | 24FMN-SSTRK-A | 23.0 | 26.0 | 25.0 | 800 | 480 | 560 |
| 25 | 25FMN-BTK-A | 25FMN-BTRK-A | 25FMN-STK-A | 25FMN-STRK-A | 25FMN-SSTK-A | 25FMN-SSTRK-A | 24.0 | 27.0 | 26.0 | 800 | 480 | 560 |
| 26 | 26FMN-BTK-A | 26FMN-BTRK-A | 26FMN-STK-A | 26FMN-STRK-A | 26FMN-SSTK-A | 26FMN-SSTRK-A | 25.0 | 28.0 | 27.0 | 700 | 420 | 490 |
| 27 | 27FMN-BTK-A | 27FMN-BTRK-A | 27FMN-STK-A | 27FMN-STRK-A | 27FMN-SSTK-A | 27FMN-SSTRK-A | 26.0 | 29.0 | 28.0 | 700 | 420 | 490 |
| 28 | 28FMN-BTK-A | 28FMN-BTRK-A | 28FMN-STK-A | 28FMN-STRK-A | 28FMN-SSTK-A | 28FMN-SSTRK-A | 27.0 | 30.0 | 29.0 | 700 | 420 | 490 |
| 29 | 29FMN-BTK-A | 29FMN-BTRK-A | 29FMN-STK-A | 29FMN-STRK-A | 29FMN-SSTK-A | 29FMN-SSTRK-A | 28.0 | 31.0 | 30.0 | 700 | 420 | 490 |
| 30 | 30FMN-BTK-A | 30FMN-BTRK-A | 30FMN-STK-A | 30FMN-STRK-A | 30FMN-SSTK-A | 30FMN-SSTRK-A | 29.0 | 32.0 | 31.0 | 600 | 360 | 420 |
| 31 | 31FMN-BTK-A | 31FMN-BTRK-A | 31FMN-STK-A | 31FMN-STRK-A | 31FMN-SSTK-A | 31FMN-SSTRK-A | 30.0 | 33.0 | 32.0 | 600 | 360 | 420 |
| 32 | 32FMN-BTK-A | 32FMN-BTRK-A | 32FMN-STK-A | 32FMN-STRK-A | 32FMN-SSTK-A | 32FMN-SSTRK-A | 31.0 | 34.0 | 33.0 | 600 | 360 | 420 |
| 33 | 33FMN-BTK-A | 33FMN-BTRK-A | 33FMN-STK-A | 33FMN-STRK-A | 33FMN-SSTK-A | 33FMN-SSTRK-A | 32.0 | 35.0 | 34.0 | 600 | 360 | 420 |
| 34 | 34FMN-BTK-A | 34FMN-BTRK-A | 34FMN-STK-A | 34FMN-STRK-A | 34FMN-SSTK-A | 34FMN-SSTRK-A | 33.0 | 36.0 | 35.0 | 600 | 360 | 420 |
| 35 | 35FMN-BTK-A | 35FMN-BTRK-A | 35FMN-STK-A | 35FMN-STRK-A | 35FMN-SSTK-A | 35FMN-SSTRK-A | 34.0 | 37.0 | 36.0 | 500 | 300 | 350 |
| 36 | 36FMN-BTK-A | 36FMN-BTRK-A | 36FMN-STK-A | 36FMN-STRK-A | 36FMN-SSTK-A | 36FMN-SSTRK-A | 35.0 | 38.0 | 37.0 | 500 | 300 | 350 |
| 37 | 37FMN-BTK-A | 37FMN-BTRK-A | 37FMN-STK-A | 37FMN-STRK-A | 37FMN-SSTK-A | 37FMN-SSTRK-A | 36.0 | 39.0 | 38.0 | 500 | 300 | 350 |
| 38 | 38FMN-BTK-A | 38FMN-BTRK-A | 38FMN-STK-A | 38FMN-STRK-A | 38FMN-SSTK-A | 38FMN-SSTRK-A | 37.0 | 40.0 | 39.0 | 500 | 300 | 350 |
| 39 | 39FMN-BTK-A | 39FMN-BTRK-A | 39FMN-STK-A | 39FMN-STRK-A | 39FMN-SSTK-A | 39FMN-SSTRK-A | 38.0 | 41.0 | 40.0 | 500 | 300 | 350 |
| 40 | 40FMN-BTK-A | 40FMN-BTRK-A | 40FMN-STK-A | 40FMN-STRK-A | 40FMN-SSTK-A | 40FMN-SSTRK-A | 39.0 | 42.0 | 41.0 | 500 | 300 | 350 |


Material and Finish

Contact: Phosphor bronze, copper-undercoated, tin-plated (reflow treatment)
Housing: 4 to 22 circuits/PBT, UL94V-0, Normal type...gray Reverse type...brown
23 to 40 circuits/PA 6T, UL94V-0, Normal type...gray Reverse type...black

RoHS compliance This product displays (LF)(SN) on a label.

FMN CONNECTOR

SMT type Connector

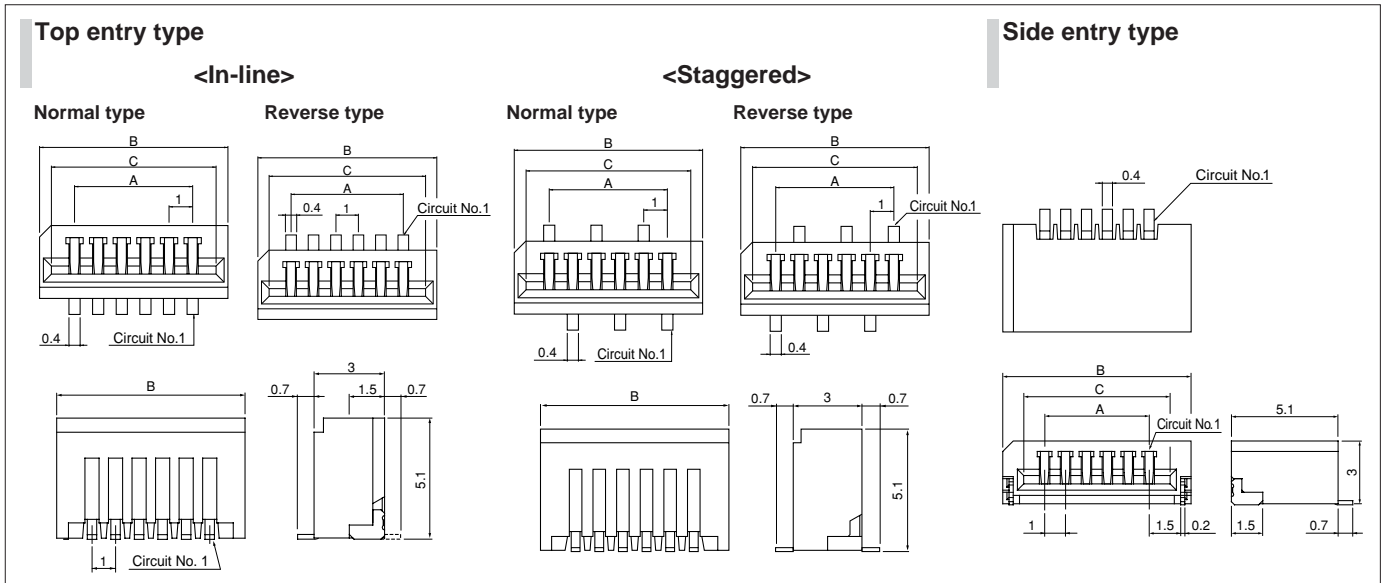

| Circuits | Model No. | | | | | Dimensions (mm) | | | Qty/reel | | |
|----------|----------------|-----------------|------------------|------------------|-----------------|-----------------|----------------|-----------------|----------|-----------------|-----------------|
| | Top entry type | | | | | A | B | | C | Side entry type | |
| | In-line | | Staggered | | Side entry type | | Top entry type | Side entry type | | Top entry type | Side entry type |
| | Normal type | Reverse type | Normal type | Reverse type | Side entry type | | | | | | |
| 4 | 04FMN-BMT-A-TF | 04FMN-BMTR-A-TB | 04FMN-BMTTN-A-TF | 04FMN-BMTTR-A-TB | 04FMN-SMT-A-TF | 3.0 | 6.0 | 7.0 | 5.0 | 1,000 | 2,000 |
| 5 | 05FMN-BMT-A-TF | 05FMN-BMTR-A-TB | 05FMN-BMTTN-A-TF | 05FMN-BMTTR-A-TB | 05FMN-SMT-A-TF | 4.0 | 7.0 | 8.0 | 6.0 | 1,000 | 2,000 |
| 6 | 06FMN-BMT-A-TF | 06FMN-BMTR-A-TB | 06FMN-BMTTN-A-TF | 06FMN-BMTTR-A-TB | 06FMN-SMT-A-TF | 5.0 | 8.0 | 9.0 | 7.0 | 1,000 | 2,000 |
| 7 | 07FMN-BMT-A-TF | 07FMN-BMTR-A-TB | 07FMN-BMTTN-A-TF | 07FMN-BMTTR-A-TB | 07FMN-SMT-A-TF | 6.0 | 9.0 | 10.0 | 8.0 | 1,000 | 2,000 |
| 8 | 08FMN-BMT-A-TF | 08FMN-BMTR-A-TB | 08FMN-BMTTN-A-TF | 08FMN-BMTTR-A-TB | 08FMN-SMT-A-TF | 7.0 | 10.0 | 11.0 | 9.0 | 1,000 | 2,000 |
| 9 | 09FMN-BMT-A-TF | 09FMN-BMTR-A-TB | 09FMN-BMTTN-A-TF | 09FMN-BMTTR-A-TB | 09FMN-SMT-A-TF | 8.0 | 11.0 | 12.0 | 10.0 | 1,000 | 2,000 |
| 10 | 10FMN-BMT-A-TF | 10FMN-BMTR-A-TB | 10FMN-BMTTN-A-TF | 10FMN-BMTTR-A-TB | 10FMN-SMT-A-TF | 9.0 | 12.0 | 13.0 | 11.0 | 1,000 | 2,000 |
| 11 | 11FMN-BMT-A-TF | 11FMN-BMTR-A-TB | 11FMN-BMTTN-A-TF | 11FMN-BMTTR-A-TB | 11FMN-SMT-A-TF | 10.0 | 13.0 | 14.0 | 12.0 | 1,000 | 2,000 |
| 12 | 12FMN-BMT-A-TF | 12FMN-BMTR-A-TB | 12FMN-BMTTN-A-TF | 12FMN-BMTTR-A-TB | 12FMN-SMT-A-TF | 11.0 | 14.0 | 15.0 | 13.0 | 1,000 | 2,000 |
| 13 | 13FMN-BMT-A-TF | 13FMN-BMTR-A-TB | 13FMN-BMTTN-A-TF | 13FMN-BMTTR-A-TB | 13FMN-SMT-A-TF | 12.0 | 15.0 | 16.0 | 14.0 | 1,000 | 2,000 |
| 14 | 14FMN-BMT-A-TF | 14FMN-BMTR-A-TB | 14FMN-BMTTN-A-TF | 14FMN-BMTTR-A-TB | 14FMN-SMT-A-TF | 13.0 | 16.0 | 17.0 | 15.0 | 1,000 | 2,000 |
| 15 | 15FMN-BMT-A-TF | 15FMN-BMTR-A-TB | 15FMN-BMTTN-A-TF | 15FMN-BMTTR-A-TB | 15FMN-SMT-A-TF | 14.0 | 17.0 | 18.0 | 16.0 | 1,000 | 2,000 |
| 16 | 16FMN-BMT-A-TF | 16FMN-BMTR-A-TB | 16FMN-BMTTN-A-TF | 16FMN-BMTTR-A-TB | 16FMN-SMT-A-TF | 15.0 | 18.0 | 19.0 | 17.0 | 1,000 | 2,000 |
| 17 | 17FMN-BMT-A-TF | 17FMN-BMTR-A-TB | 17FMN-BMTTN-A-TF | 17FMN-BMTTR-A-TB | 17FMN-SMT-A-TF | 16.0 | 19.0 | 20.0 | 18.0 | 1,000 | 2,000 |
| 18 | 18FMN-BMT-A-TF | 18FMN-BMTR-A-TB | 18FMN-BMTTN-A-TF | 18FMN-BMTTR-A-TB | 18FMN-SMT-A-TF | 17.0 | 20.0 | 21.0 | 19.0 | 1,000 | 2,000 |
| 19 | 19FMN-BMT-A-TF | 19FMN-BMTR-A-TB | 19FMN-BMTTN-A-TF | 19FMN-BMTTR-A-TB | 19FMN-SMT-A-TF | 18.0 | 21.0 | 22.0 | 20.0 | 1,000 | 2,000 |
| 20 | 20FMN-BMT-A-TF | 20FMN-BMTR-A-TB | 20FMN-BMTTN-A-TF | 20FMN-BMTTR-A-TB | 20FMN-SMT-A-TF | 19.0 | 22.0 | 23.0 | 21.0 | 1,000 | 2,000 |
| 21 | 21FMN-BMT-A-TF | 21FMN-BMTR-A-TB | — | 21FMN-BMTTR-A-TB | 21FMN-SMT-A-TF | 20.0 | 23.0 | 24.0 | 22.0 | 1,000 | 2,000 |
| 22 | 22FMN-BMT-A-TF | 22FMN-BMTR-A-TB | 22FMN-BMTTN-A-TF | 22FMN-BMTTR-A-TB | 22FMN-SMT-A-TF | 21.0 | 24.0 | 25.0 | 23.0 | 1,000 | 2,000 |
| 23 | 23FMN-BMT-A-TF | 23FMN-BMTR-A-TB | 23FMN-BMTTN-A-TF | — | 23FMN-SMT-A-TF | 22.0 | 25.0 | 26.0 | 24.0 | 1,000 | 2,000 |
| 24 | 24FMN-BMT-A-TF | 24FMN-BMTR-A-TB | 24FMN-BMTTN-A-TF | — | 24FMN-SMT-A-TF | 23.0 | 26.0 | 27.0 | 25.0 | 1,000 | 2,000 |
| 25 | 25FMN-BMT-A-TF | 25FMN-BMTR-A-TB | 25FMN-BMTTN-A-TF | 25FMN-BMTTR-A-TB | 25FMN-SMT-A-TF | 24.0 | 27.0 | 28.0 | 26.0 | 1,000 | 2,000 |
| 26 | 26FMN-BMT-A-TF | 26FMN-BMTR-A-TB | 26FMN-BMTTN-A-TF | — | 26FMN-SMT-A-TF | 25.0 | 28.0 | 29.0 | 27.0 | 1,000 | 2,000 |
| 27 | 27FMN-BMT-A-TF | 27FMN-BMTR-A-TB | 27FMN-BMTTN-A-TF | 27FMN-BMTTR-A-TB | 27FMN-SMT-A-TF | 26.0 | 29.0 | 30.0 | 28.0 | 1,000 | 2,000 |
| 28 | — | 28FMN-BMTR-A-TB | 28FMN-BMTTN-A-TF | 28FMN-BMTTR-A-TB | 28FMN-SMT-A-TF | 27.0 | 30.0 | 31.0 | 29.0 | 1,000 | 2,000 |
| 29 | 29FMN-BMT-A-TF | 29FMN-BMTR-A-TB | 29FMN-BMTTN-A-TF | 29FMN-BMTTR-A-TB | 29FMN-SMT-A-TF | 28.0 | 31.0 | 32.0 | 30.0 | 1,000 | 2,000 |
| 30 | 30FMN-BMT-A-TF | 30FMN-BMTR-A-TB | 30FMN-BMTTN-A-TF | 30FMN-BMTTR-A-TB | 30FMN-SMT-A-TF | 29.0 | 32.0 | 33.0 | 31.0 | 1,000 | 2,000 |
| 31 | 31FMN-BMT-A-TF | 31FMN-BMTR-A-TB | 31FMN-BMTTN-A-TF | 31FMN-BMTTR-A-TB | 31FMN-SMT-A-TF | 30.0 | 33.0 | 34.0 | 32.0 | 1,000 | 2,000 |
| 32 | 32FMN-BMT-A-TF | 32FMN-BMTR-A-TB | 32FMN-BMTTN-A-TF | 32FMN-BMTTR-A-TB | 32FMN-SMT-A-TF | 31.0 | 34.0 | 35.0 | 33.0 | 1,000 | 2,000 |
| 33 | 33FMN-BMT-A-TF | — | 33FMN-BMTTN-A-TF | 33FMN-BMTTR-A-TB | 33FMN-SMT-A-TF | 32.0 | 35.0 | 36.0 | 34.0 | 1,000 | 2,000 |
| 34 | 34FMN-BMT-A-TF | — | 34FMN-BMTTN-A-TF | 34FMN-BMTTR-A-TB | 34FMN-SMT-A-TF | 33.0 | 36.0 | 37.0 | 35.0 | 1,000 | 2,000 |
| 35 | 35FMN-BMT-A-TF | 35FMN-BMTR-A-TB | 35FMN-BMTTN-A-TF | 35FMN-BMTTR-A-TB | 35FMN-SMT-A-TF | 34.0 | 37.0 | 38.0 | 36.0 | 1,000 | 2,000 |
| 36 | 36FMN-BMT-A-TF | 36FMN-BMTR-A-TB | 36FMN-BMTTN-A-TF | 36FMN-BMTTR-A-TB | 36FMN-SMT-A-TF | 35.0 | 38.0 | 39.0 | 37.0 | 1,000 | 2,000 |
| 37 | 37FMN-BMT-A-TF | 37FMN-BMTR-A-TB | 37FMN-BMTTN-A-TF | 37FMN-BMTTR-A-TB | 37FMN-SMT-A-TF | 36.0 | 39.0 | 40.0 | 38.0 | 1,000 | 2,000 |
| 38 | 38FMN-BMT-A-TF | 38FMN-BMTR-A-TB | 38FMN-BMTTN-A-TF | 38FMN-BMTTR-A-TB | 38FMN-SMT-A-TF | 37.0 | 40.0 | 41.0 | 39.0 | 1,000 | 2,000 |
| 39 | 39FMN-BMT-A-TF | 39FMN-BMTR-A-TB | 39FMN-BMTTN-A-TF | 39FMN-BMTTR-A-TB | 39FMN-SMT-A-TF | 38.0 | 41.0 | 42.0 | 40.0 | 1,000 | 2,000 |
| 40 | 40FMN-BMT-A-TF | 40FMN-BMTR-A-TB | 40FMN-BMTTN-A-TF | 40FMN-BMTTR-A-TB | 40FMN-SMT-A-TF | 39.0 | 42.0 | 43.0 | 41.0 | 1,000 | 2,000 |

Material and Finish

Contact: Phosphor bronze, copper-undercoated, tin-plated (reflow treatment)
Housing: PA 6T, UL94V-0, black
Solder tab: Brass, copper-undercoated, tin-plated (reflow treatment)

RoHS compliance This product displays (LF)(SN) on a label.

Note: 1. The products listed above are supplied on embossed tape.

2. Contact JST for the top entry type headers with suction cap.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View 06FMN-SMT-A-TF\(LF\)\(SN\) on WIN SOURCE](#)
- [JST Sales America Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management