




**THE DATASHEET OF  
153CMQ080**



SCHOTTKY RECTIFIER

150 Amp




Major Ratings and Characteristics

| Characteristics                              | 153CMQ...  | Units      |
|--|------------|------------|
| $I_{F(AV)}$ Rectangular waveform             | 150        | A          |
| $V_{RRM}$ range                              | 80 to 100  | V          |
| $I_{FSM}$ @ $t_p = 5 \mu s$ sine             | 7000       | A          |
| $V_F$ @ 75Apk, $T_J = 125^\circ C$ (per leg) | 0.80       | V          |
| $T_J$ range                                  | -55 to 175 | $^\circ C$ |

Description/ Features

The 153CMQ isolated center tap Schottky rectifier module series has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 175° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 175° C  $T_J$  operation
- Isolated heatsink
- Center tap module
- Multiple leads per terminal for high frequency, high current PC board mounting
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Low profile, high current package

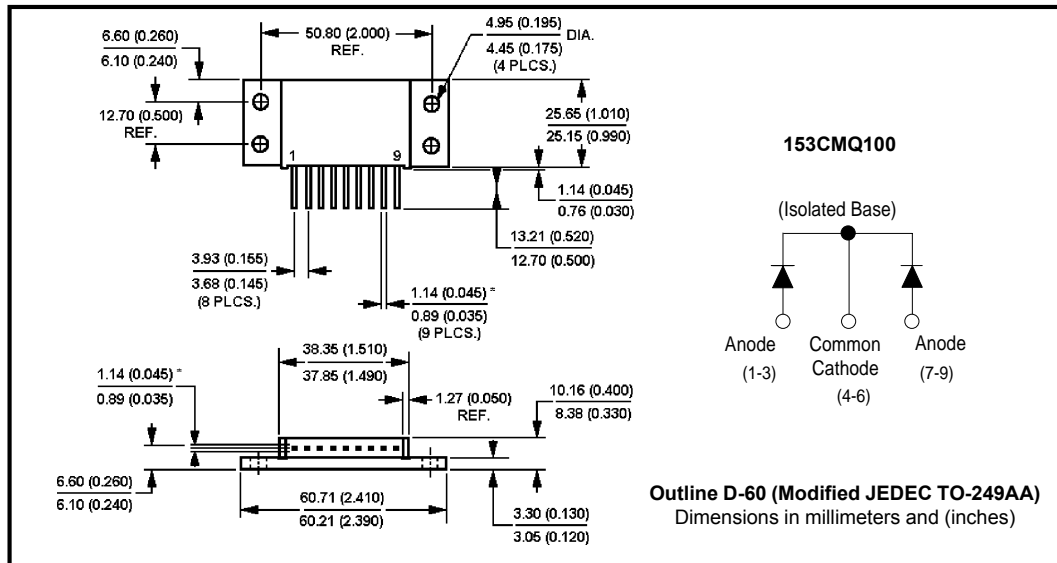

## Voltage Ratings

| Part number                                     | 153CMQ080 | 153CMQ090 | 153CMQ100 |
|---|-----------|-----------|-----------|
| $V_R$ Max. DC Reverse Voltage (V)               | 80        | 90        | 100       |
| $V_{RWM}$ Max. Working Peak Reverse Voltage (V) |           |           |           |

## Absolute Maximum Ratings

| Parameters  | 153CMQ | Units | Conditions   |
|---|--------|-------|--|
| $I_{F(AV)}$ Max. Average Forward Current<br>* See Fig. 5                          | 150    | A     | 50% duty cycle @ $T_C = 90^\circ\text{C}$ , rectangular wave form  |
| $I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7 | 7000   | A     | Following any rated load condition and with rated $V_{RWM}$ applied  |
|   | 720    |       |  |
| $E_{AS}$ Non-Repetitive Avalanche Energy (Per Leg)                                | 15     | mJ    | $T_J = 25^\circ\text{C}$ , $I_{AS} = 1$ Amps, $L = 30$ mH  |
| $I_{AR}$ Repetitive Avalanche Current (Per Leg)                                   | 1      | A     | Current decaying linearly to zero in 1 $\mu\text{sec}$<br>Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical |

## Electrical Specifications

| Parameters   | 153CMQ | Units            | Conditions  |
|--|--------|------------------|---|
| $V_{FM}$ Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1)    | 0.96   | V                | @ 75A   |
|  | 1.19   | V                | @ 150A  |
|  | 0.80   | V                | @ 75A   |
|  | 0.99   | V                | @ 150A  |
| $I_{RM}$ Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1) | 1.5    | mA               | $T_J = 25^\circ\text{C}$  |
|  | 20     | mA               | $T_J = 125^\circ\text{C}$   |
| $C_T$ Max. Junction Capacitance (Per Leg)                        | 1400   | pF               | $V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$ |
| $L_S$ Typical Series Inductance (Per Leg)                        | 9.2    | nH               | Measured lead to lead 5mm from package body                           |
| $dv/dt$ Max. Voltage Rate of Change (Rated $V_R$ )               | 10000  | V/ $\mu\text{s}$ |   |

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle <2%

## Thermal-Mechanical Specifications

| Parameters  | 153CMQ          | Units              | Conditions                           |
|---|-----------------|--------------------|--------------------------------------|
| $T_J$ Max. Junction Temperature Range                             | -55 to 175      | $^\circ\text{C}$   |                                      |
| $T_{stg}$ Max. Storage Temperature Range                          | -55 to 175      | $^\circ\text{C}$   |                                      |
| $R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Leg)     | 1.0             | $^\circ\text{C/W}$ | DC operation * See Fig. 4            |
| $R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Package) | 0.50            | $^\circ\text{C/W}$ | DC operation                         |
| $R_{thCS}$ Typical Thermal Resistance, Case to Heatsink           | 0.10            | $^\circ\text{C/W}$ | Mounting surface, smooth and greased |
| wt Approximate Weight   | 56 (2.0)        | g (oz.)            |                                      |
| T Mounting Torque   | Min. 40 (35)    | Kg-cm<br>(lbf-in)  |                                      |
|   | Max. 58 (50)    |                    |                                      |
| Case Style  | D-60 (TO-249AA) |                    | Modified JEDEC                       |

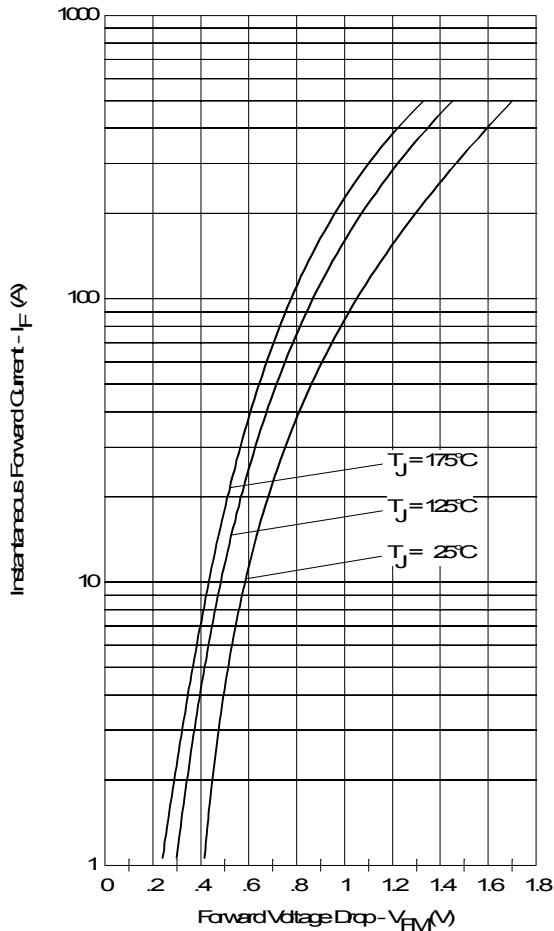


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

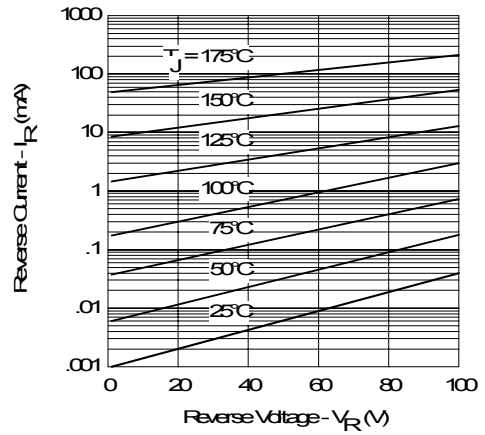


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

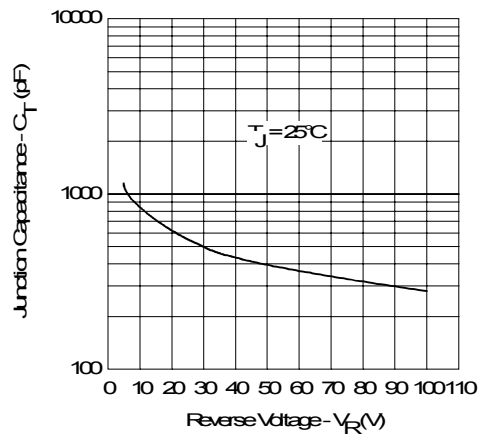


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

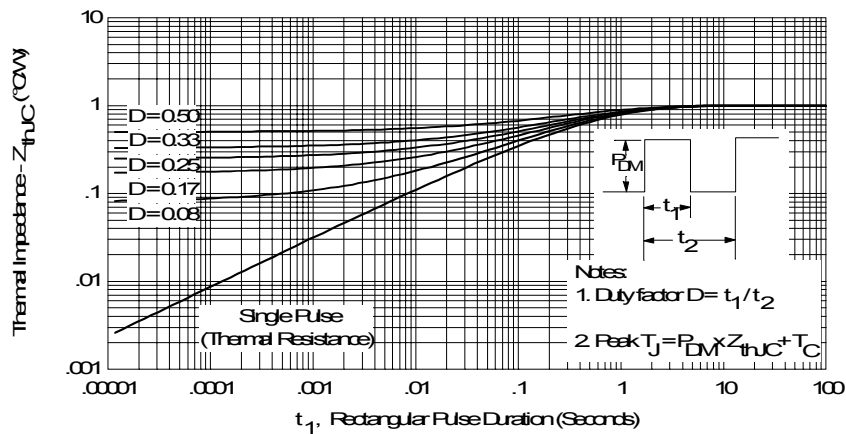


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

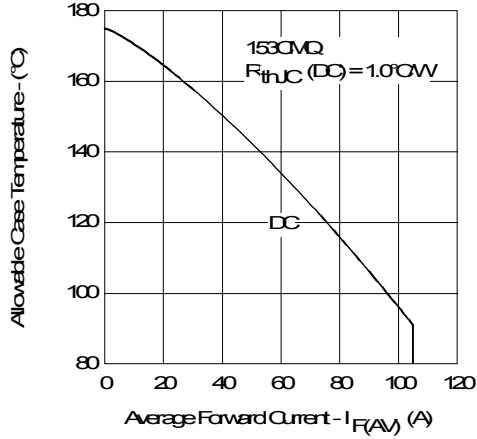


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

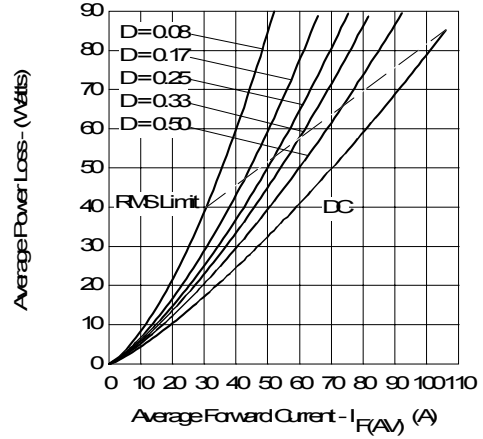


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

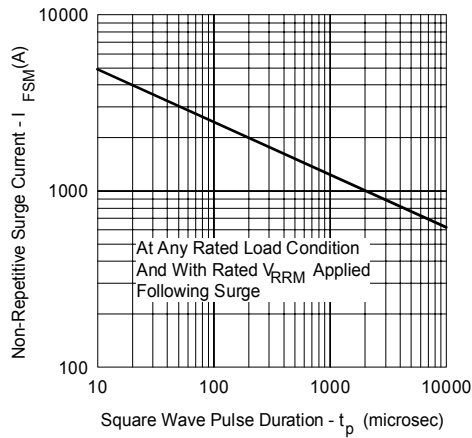


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

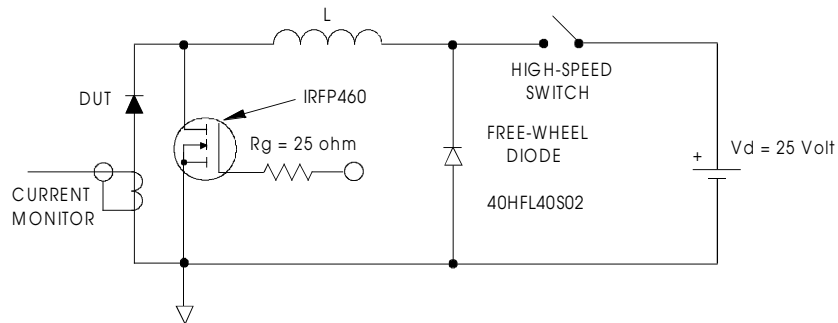


Fig. 8 - Unclamped Inductive Test Circuit



Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level.  
Qualification Standards can be found on IR's Web site.

International  
**IOR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 05/02

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 153CMQ080 on WIN SOURCE](#)
-  [Vishay Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management