




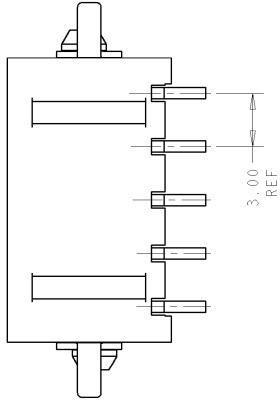


THE DATASHEET OF
2-1445057-3

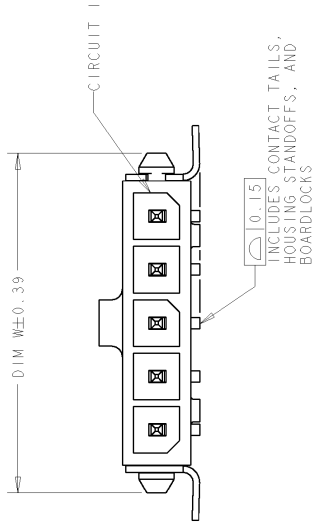

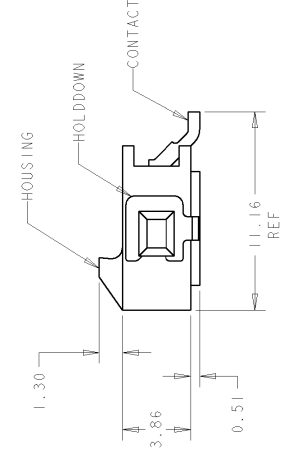


- △ MATERIAL: CONTACTS - BRASS;
 HOUSING - UL 94V-0 RATED
 HOLDDOWNS: - PHOSPHOR BRO
 NICKEL.
- △ PLATING: CONTACTS- 2.54µm MINIMUM
 NICKEL.
 HOLDDOWNS- 2.54µm MINIMUM
 NICKEL.
- △ RECOMMENDED PC BOARD THICKNESS OF
 NICKEL
- △ PLATING: CONTACTS-2.54µm MINIMUM
 NICKEL
 HOLDDOWNS- 2.54µm MINIMUM
 NICKEL.

△5	3.00	10
△2	33.00	40
△2	30.00	37
△2	27.00	34
△2	24.00	31
△2	21.00	28
△2	18.00	25
△2	15.00	22
△2	12.00	19
△2	9.00	16
△2	6.00	13
△2	3.00	10
FINISH	DIM Z	DIM

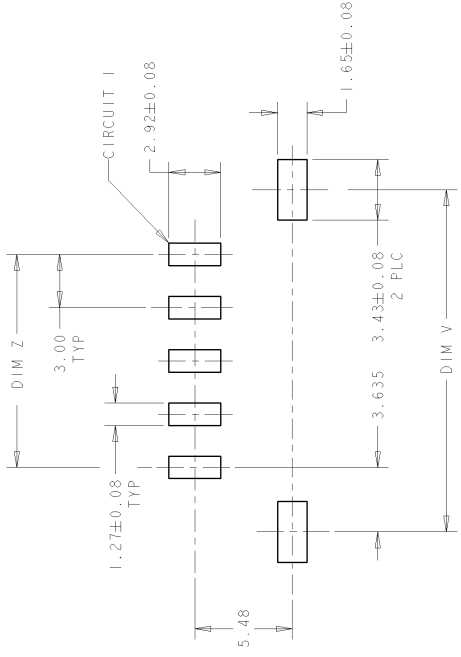

PCB LAYOUT COMPONENT SIDE △



THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP. UNAUTHORIZED REPRODUCTION OR DISSEMINATION OF THIS DOCUMENT IS PROHIBITED.	
DATE	03-OCT
CHKD	ROOT
APPD	WHIT
BY	3-MAY
PRODUCT SPEC	
APPLICATION SPEC	
WEIGHT	
CUSTOMER DRAWING	

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 2-1445057-3 on WIN SOURCE](#)

 [TE Connectivity](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management