



**THE DATASHEET OF**  
**27632602RP2**





RIGHT ANGLE

ELECTRICAL CHARACTERISTICS

- VOLTAGE: 250 VAC (RMS) Max.
- CURRENT RATING: 2 AMPS
- CONTACT RESISTANCE: 20 mΩ Max.
- INSULATION RESISTANCE: 5000 MΩ Min.
- DIELECTRIC WITHSTANDING: 500 VAC
- OPERATING TEMPERATURE: -40°C TO +105°C
- PROCESSING TEMPERATURE: 260°C FOR 10 SECONDS

MATERIAL CHARACTERISTICS

- HOUSING: PA9T, UL94V-0, BLACK
- CONTACTS: COPPER ALLOY
- PLATING: GOLD FLASH ENTIRE CONTACT

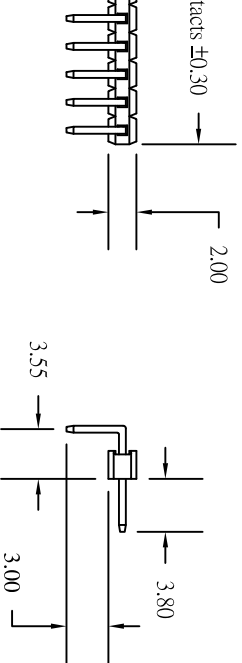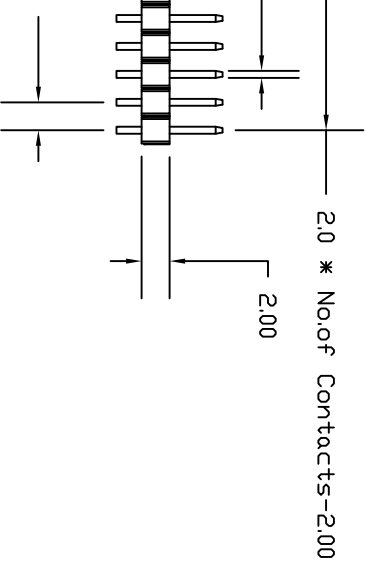



**2763YY02RP2**

SERIES \_\_\_\_\_  
 2763 = SINGLE ROW  
 POSITIONS \_\_\_\_\_  
 SINGLE-INCREMENTS OF 1  
 (01 TO 36)

TYPE \_\_\_\_\_  
 02 = RIGHT ANGLE

PLATING \_\_\_\_\_  
 P2 = GOLD FLASH

Recommended P.C. Board  
 Hole Layout

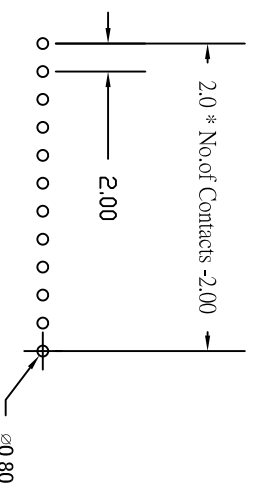

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED. THIS DRAWING IS THE PROPERTY OF NORCOMP. IT IS TO BE USED AS THE BASIS FOR THE FABRICATION OF THE PRODUCT. NO PART OF THIS DRAWING IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF NORCOMP.

DRAWN: P. JENKINS  
 DATE: 01/27/2006

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:	SHEET	OF	REV
NTS	1	1	4
DWG NO.	2763YY02RP2		

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 27632602RP2 on WIN SOURCE](#)

 [NorComp Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management