



THE DATASHEET OF
27630402RP2





RIGHT ANGLE

ELECTRICAL CHARACTERISTICS

- VOLTAGE: 250 VAC (RMS) Max.
- CURRENT RATING: 2 AMPS
- CONTACT RESISTANCE: 20 mΩ Max.
- INSULATION RESISTANCE: 5000 MΩ Min.
- DIELECTRIC WITHSTANDING: 500 VAC
- OPERATING TEMPERATURE: -40°C TO +105°C
- PROCESSING TEMPERATURE: 260°C FOR 10 SECONDS

MATERIAL CHARACTERISTICS

- HOUSING: PA9T, UL94V-0, BLACK
- CONTACTS: COPPER ALLOY
- PLATING: GOLD FLASH ENTIRE CONTACT

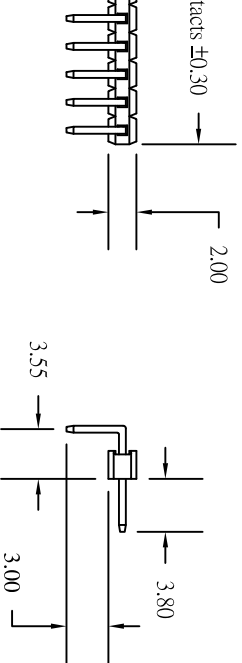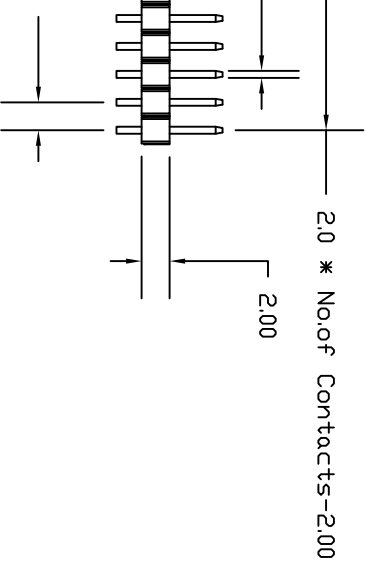



2763YY02RP2

SERIES _____
 2763 = SINGLE ROW
 POSITIONS _____
 SINGLE-INCREMENTS OF 1
 (01 TO 36)

TYPE _____
 02 = RIGHT ANGLE

PLATING _____
 P2 = GOLD FLASH

Recommended P.C. Board
 Hole Layout

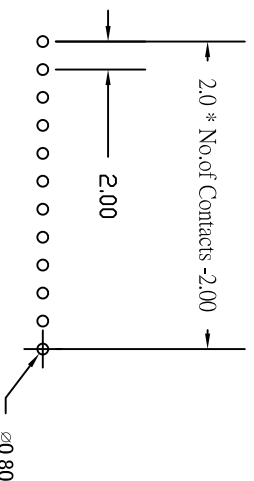

NOTIFICATIONS ARE
 AND SHALL NOT
 BE USED AS THE
 BASIS FOR SALE OF
 THIS PRODUCT
 WITHOUT PERMISSION.

DRAWN:
P. JENKINS

DATE:
 01/27/2006

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:	SHEET	OF	REV
NTS	1	1	4
DWG NO.			
2763YY02RP2			

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 27630402RP2 on WIN SOURCE](#)

 [NorComp Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management