



THE DATASHEET OF CS48-35B



CentralTM Semiconductor Corp.

145 Adams Avenue, Hauppauge, NY 11788 USA
Tel: (631) 435-1110 • Fax: (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

CS48-35B
CS48-35D
CS48-35M
CS48-35N
CS48-35P
CS48-35PB

**SILICON CONTROLLED RECTIFIER
35 AMP, 200 THRU 1200 VOLTS**

JEDEC TO-48 CASE

DESCRIPTION

The CENTRAL SEMICONDUCTOR CS48-35B series types are High Power Silicon Controlled Rectifiers designed for phase control applications.

MAXIMUM RATINGS (T_C = 25°C unless otherwise noted)

	SYMBOL	CS48 -35B	CS48 -35D	CS48 -35M	CS48 -35N	CS48 -35P	CS48 -35PB	UNITS
Peak Repetitive Off-State Voltage	V _{DRM} , V _{RRM}	200	400	600	800	1000	1200	V
RMS On-State Current (T _C = 75°C)	I _{T(RMS)}				35			A
Peak One Cycle Surge (t = 10ms)	I _{TSM}				330			A
I ² t Value for Fusing (t = 10ms)	I ² t				545			A ² s
Peak Gate Power (tp = 10μs)	P _{GM}				60			W
Average Gate Power Dissipation	P _{G(AV)}				1.0			W
Peak Forward Gate Current (tp = 10μs)	I _{FGM}				10			A
Peak Forward Gate Voltage (tp = 10μs)	V _{FGM}				16			V
Peak Reverse Gate Voltage (tp = 10μs)	V _{RGM}				5.0			V
Critical Rate of Rise of On-State Current	di/dt				100			A/μs
Storage Temperature	T _{stg}				-40 to +150			°C
Junction Temperature	T _J				-40 to +125			°C
Thermal Resistance	θ _{J-C}				1.0			°C/W


ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I _{DRM} , I _{RRM}	Rated V _{DRM} , V _{RRM}			0.02	mA
I _{DRM} , I _{RRM}	Rated V _{DRM} , V _{RRM} , T _C = 125°C			3.30	mA
I _{GT}	V _D = 12V, R _L = 33Ω			40	mA
I _H	I _T = 500mA			100	mA
V _{GT}	V _D = 12V, R _L = 33Ω			1.50	V
V _{TM}	I _{TM} = 70A, tp = 10ms			2.30	V
dv/dt	V _D = .67 x V _{DRM} , T _C = 125°C	200			V/μs


(OVER)

CS48-35B SERIES RATING AND CHARACTERISTIC CURVES


RMS ON-STATE CURRENT vs. CASE TEMPERATURE

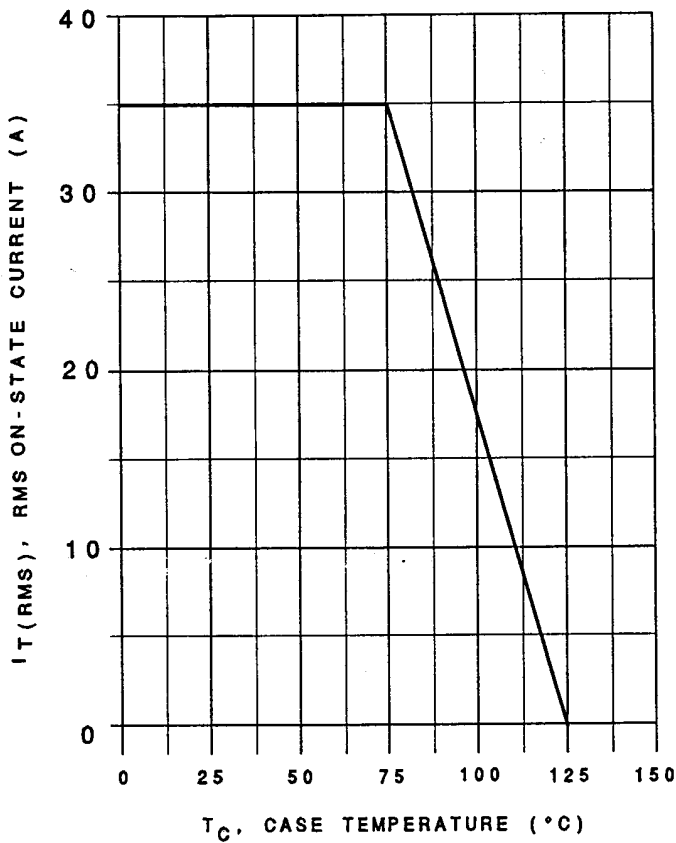

MAXIMUM ON-STATE CHARACTERISTICS

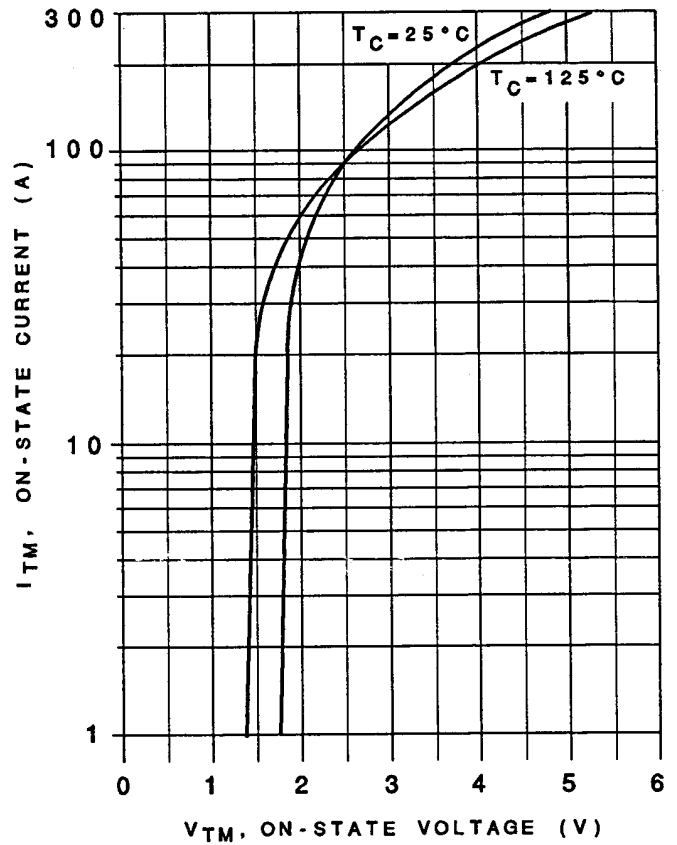

MECHANICAL DIMENSIONS

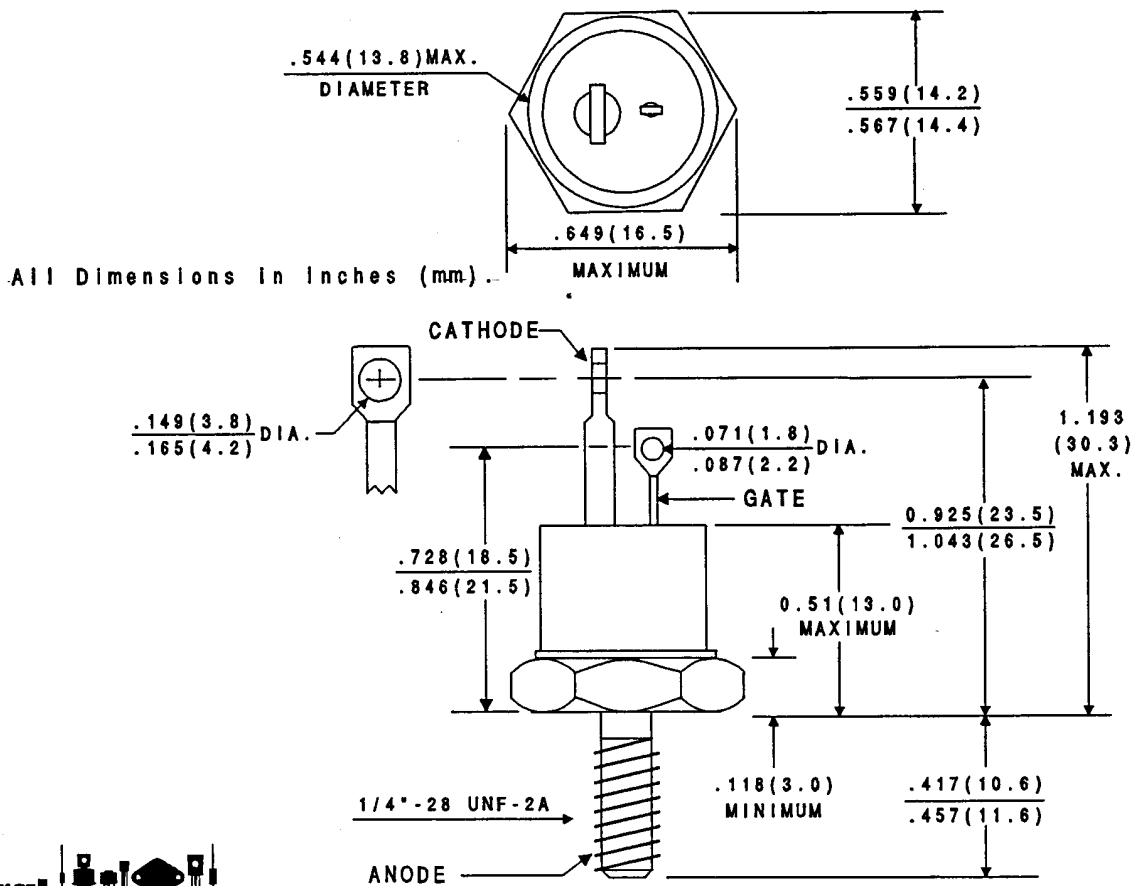

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com



Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View CS48-35B on WIN SOURCE](#)
-  [Central Semiconductor Corp Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management