




**THE DATASHEET OF  
7C40000281**

# SMD Crystal Oscillators- CMOS Output 5.0 x 3.2 x 1.2 mm 7C Series

Oscillators  
 Series

## Features


- Small SMD seam sealed clock crystal oscillator units.
- High precision characteristic covering up to wide frequency range.
- Designed for automatic mounting and reflow soldering.
- Tri-State function available.
- Supply voltage range : 1.8 V ~ 5.0 V.
- High stability, low jitter, low power consumption.
- Main application : wireless communication set, PDA, and DSC.
- RoHS Compliant / Pb Free.

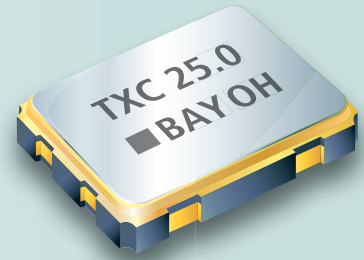


## Electrical Specifications

Item / Type		7C		
Output Type		CMOS		
Output Load		15 pF , 30 pF		
Oscillation Mode		Fundamental / 3rd Overtone		
Supply Voltage		1.8 V	2.5 V , 2.8 V , 3.3 V	5 V
Frequency Range		1 ~ 150 MHz		
Frequency Stability		± 20 ppm , ± 25 ppm , ± 30 ppm , ± 50 ppm		
Operating Temperature Range		- 10 ~ + 70 °C , - 40 ~ + 85 °C		
Storage Temperature Range		- 55 ~ + 125 °C		
Voltage Vol ( Max. ) / Voh ( Min. )		0.1 VDD / 0.9 VDD		
Rise ( Tr ) / Fall ( Tf ) Time		8 ns Max.		
Current Consumption	1-75 MHz	5 mA Max.	10 mA Max.	20 mA Max.
	75-150 MHz	15 mA Max.	20 mA Max.	NA
Symmetry		40 ~ 60 %		
Start-up Time		5 ms Max.		
Phase Jitter ( 12 KHz ~ 20 MHz )		1 ps Max.		
Aging ( at 25 °C )		± 3 ppm / year Max.		

## Dimensions

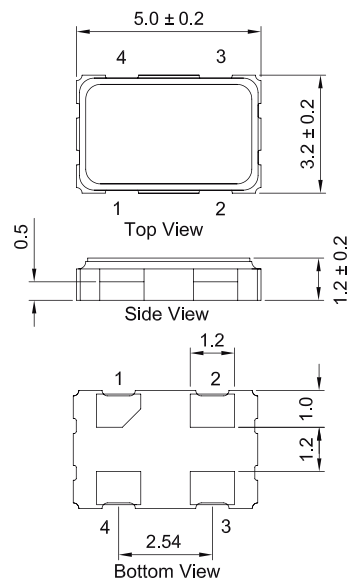

PAD FUNCTION:  
 1: ENABLE CONTROL  
 2: GND  
 3: OUT  
 4: VDD



Units: mm

Remark : Specification subject to change without prior notice. Please confirm with our sales. <http://www.txccorp.com>

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 7C40000281](#) on WIN SOURCE

 [TXC CORPORATION](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management