





Both N.O. and N.C. contacts incorporated in a small SOP8-pin package

**PhotoMOS®
GU SOP 1 Form A & 1 Form B
(AQW610S)**



mm inch



RoHS compliant

FEATURES

1. Normally open and normally closed contacts in a SOP package

The device comes in a miniature SOP measuring (W) 4.4 × (L) 9.37 × (H) 2.1 mm (W) .173 × (L) .369 × (H) .083 inch — approx. 38% of the volume and 66% of the footprint size of DIP type.

2. 60V type couples high capacity (0.45A) with low on-resistance (Typ. 1Ω) (AQW612S).

3. Applicable for 1 Form A and 1 Form B use as well as two independent 1 Form A and 1 Form B use

4. Controls low-level analog signals
PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion

5. Low-level off-state leakage current of max. 1 μA

TYPICAL APPLICATIONS

- Power supply
- Measuring equipment
- Security equipment
- Telephone equipment
- Computer input machines
- Industrial robots

TYPES

	Output rating*		Package	Part No.			Packing quantity	
	Load voltage	Load current		Tube packing style	Tape and reel packing style		Tube	Tape and reel
					Picked from the 1/2/3/4-pin side	Picked from the 5/6/7/8-pin side		
AC/DC dual use	60V	450mA	SOP8-pin	AQW612S	AQW612SX	AQW612SZ	1 tube contains: 50 pcs. 1 batch contains: 1,000 pcs.	1,000 pcs.
	350V	100mA		AQW610S	AQW610SX	AQW610SZ		

* Indicate the peak AC and DC values.
Note: The packing style indicator "X" or "Z" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	AQW612S	AQW610S	Remarks
Input	LED forward current	I _F	50 mA		
	LED reverse voltage	V _R	5 V		
	Peak forward current	I _{FP}	1 A		f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}	75 mW		
Output	Load voltage (peak AC)	V _L	60 V	350 V	
	Continuous load current	I _L	0.45 A (0.55 A)	0.1 A (0.13 A)	Peak AC, DC (): in case of using only 1a or 1b, 1 channel 100 ms (1 shot), V _L = DC
	Peak load current	I _{peak}	1.5 A	0.3 A	
	Power dissipation	P _{out}	600 mW		
Total power dissipation		P _T	650 mW		
I/O isolation voltage		V _{iso}	1,500 Vrms		
Ambient temperature	Operating	T _{opr}	-40 to +85°C -40 to +185°F		(Non-icing at low temperatures)
	Storage	T _{stg}	-40 to +100°C -40 to +212°F		

GU SOP 1 Form A & 1 Form B (AQW610S)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW612S	AQW610S	Condition	
Input	LED operate current	Typical	0.9 mA		I _L = Max.	
		Maximum	3 mA			
	LED reverse current	Minimum	0.4 mA		I _L = Max.	
		Typical	0.8 mA			
LED dropout voltage	Typical	1.25 V (1.14 V at I _F = 5 mA)		I _F = 50 mA		
	Maximum	1.5 V				
Output	On resistance	Typical	1 Ω	18 Ω	I _F = 5 mA (N.O.) I _F = 0 mA (N.C.) I _L = Max. Within 1 s	
		Maximum	2.5 Ω	25 Ω		
	Off state leakage current	Maximum	1 μA		I _F = 0 mA (N.O.) I _F = 5 mA (N.C.) V _L = Max.	
Transfer characteristics	Operate time*	Typical	T _{On} (N.O.)	0.65 ms (N.O.), 0.9 ms (N.C.)	0.28 ms (N.O.), 0.52 ms (N.C.)	I _F = 0 mA → 5 mA I _L = Max.
		Maximum	T _{Off} (N.C.)	3.0 ms		
	Reverse time*	Typical	T _{Off} (N.O.)	0.08 ms (N.O.), 0.2 ms (N.C.)	0.04 ms (N.O.), 0.23 ms (N.C.)	I _F = 5 mA → 0 mA I _L = Max.
		Maximum	T _{On} (N.C.)	1.0 ms		
	I/O capacitance	Typical	C _{iso}	0.8 pF		f = 1 MHz V _B = 0 V
	Maximum	1.5 pF				
Initial I/O isolation resistance	Minimum	R _{iso}	1,000 MΩ		500 V DC	

*Operate/Reverse time

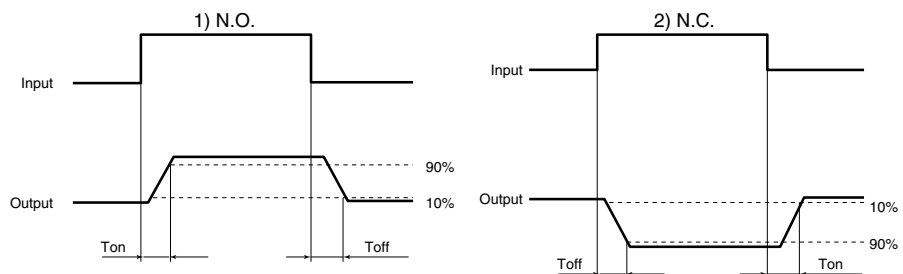

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item	Symbol	Number of used channels	Min.	Max.	Unit
LED current	I _F		5	30	mA
AQW612S	Load voltage (Peak AC)		—	48	V
	Continuous load current	1ch 2ch	—	0.55 0.45	A
AQW610S	Load voltage (Peak AC)		—	280	V
	Continuous load current	1ch 2ch	—	0.13 0.1	A


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
-40 to +185°F

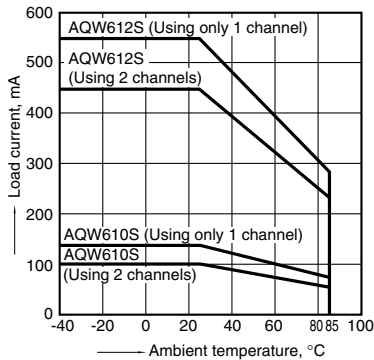


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8; LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

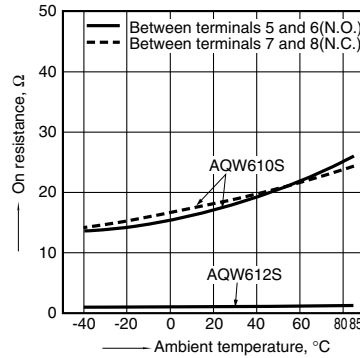


3. Operate time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

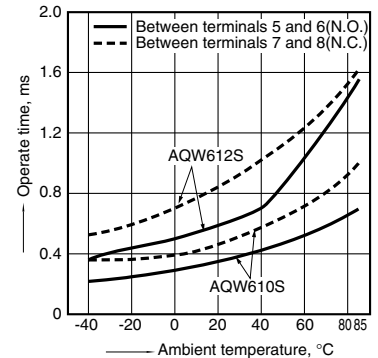


4. Reverse time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

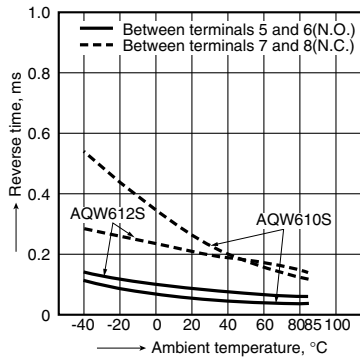


5. LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC); Continuous load current: Max. (DC)

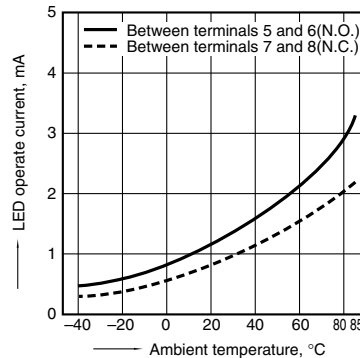


6. LED reverse current vs. ambient temperature characteristics

Load voltage: Max. (DC); Continuous load current: Max. (DC)

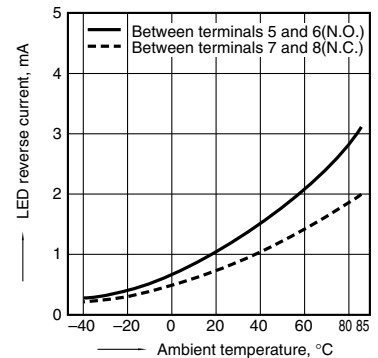


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

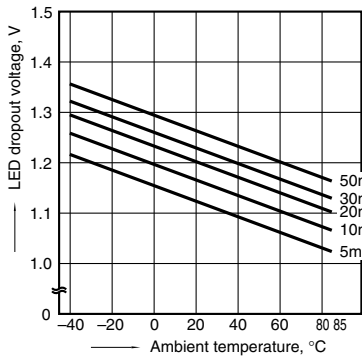


8-(1). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F




8-(2). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F




9-(1). Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

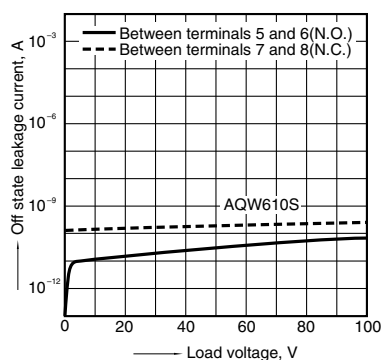


9-(2). Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

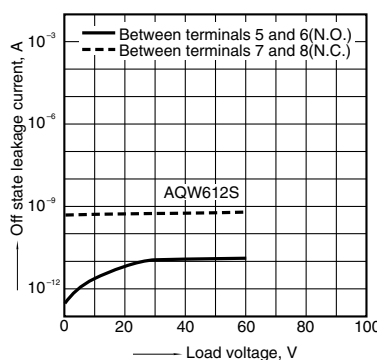


10. Operate time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

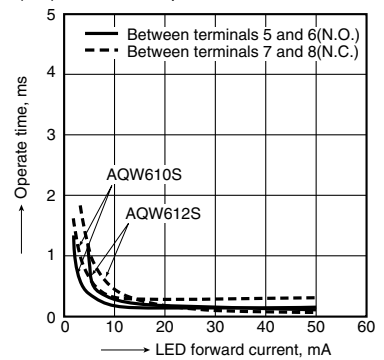


11. Reverse time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
 Load voltage: Max. (DC); Continuous load current:
 Max. (DC); Ambient temperature: 25°C 77°F

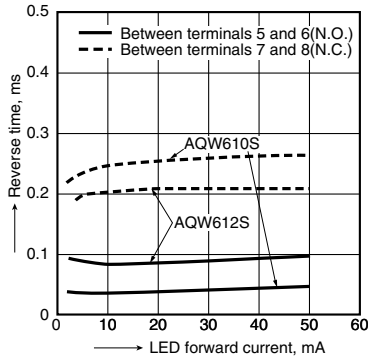

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
 LED current: 0 mA (N.O.), 5 mA (N.C.); Frequency:
 1 MHz; Ambient temperature: 25°C 77°F

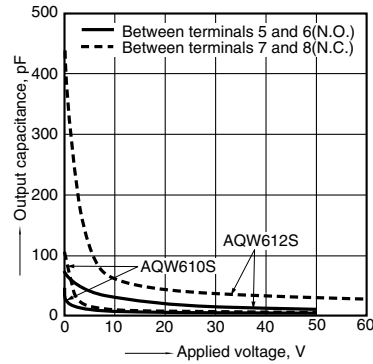

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division



■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View AQW612S on WIN SOURCE](#)
-  [Panasonic Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management