



THE DATASHEET OF ATSAMDA1-XPRO





Atmel | SMART SAM DA1 Series

Targeting Automotive Capacitive Buttons/Sliders/Wheels Applications

The Atmel® | SMART SAM DA1 series is the first within Atmel's ARM® Cortex®-M0+ based automotive qualified microcontroller family. The SAM DA1 offers superior capacitive touch hardware support by embedding the peripheral touch controller (PTC), enabling efficient button/slider/wheel and proximity-detection applications.

The series is qualified according to AEC-Q100 Grade 2 standard (-40 to +105°C ambient temperature).

Key Highlights

Comprehensive Peripheral Set for Connectivity

- Up to six serial communication interfaces (SERCOM), each configurable to operate as USART/UART, I²C or SPI.
- USB 2.0 Full-Speed embedded host and device.
- One-channel Inter-IC sound interface (I²S).

High Analog Performance

- 12-bit 350ksp/s analog-to-digital converter (ADC) with up to 20 channels, programmable gain stage, oversampling and decimation in hardware to support up to 16-bit resolution
- 10-bit, 350ksp/s digital-to-analog converter (DAC)
- Two analog comparators (ACs) with window-compare function

State-of-the-art Touch Support


- The SAM DA1 embeds the peripheral touch controller with up to 256 channels enabling high-sensitivity, environmentally robust capacitive touch solutions by auto calibration/compensation and Hardware noise filtering.

Excellent Real-time Behavior

- 12-channel event-system, DMA System and single-cycle I/O access

Key Applications

- Automotive capacitive-touch HMI with or without haptic or acoustic feedback
- Proximity detection
- Switch modules
- Rain/light sensors

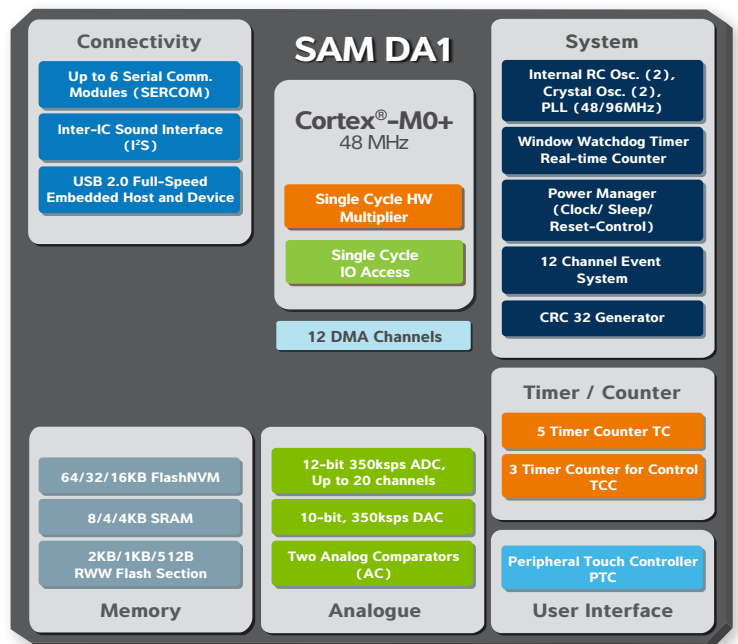



SAM DA1 Series

Targeting Automotive Capacitive Buttons/Sliders/Wheels Applications

Ecosystem

- Atmel Studio Integrated development environment (IDE) for developing and debugging: www.atmel.com/studio
- Atmel software framework: Software library providing a large collection of embedded software for Atmel Flash MCUs: www.atmel.com/asf
- Third-Party LIN software stack by ihr GmbH: www.ihr.de/ihr/index.php?lang=en

To evaluate and prototype your application, Atmel provides a Xplained Pro evaluation kit: **ATSAMDA1-XPRO**.

SAM DA1 Selector Guide

Ordering Code SAM DA1	FLASH (bytes)	SRAM (bytes)	Package	Temperature Grade	Touch, USB, I ² S
ATSAMDA1E14A-ABT	16K	4K	TQFP32	-40°C to +105°C	Yes
ATSAMDA1E14A-MBT	16K	4K	QFN32	-40°C to +105°C	Yes
ATSAMDA1E15A-ABT	32K	4K	TQFP32	-40°C to +105°C	Yes
ATSAMDA1E15A-MBT	32K	4K	QFN32	-40°C to +105°C	Yes
ATSAMDA1E16A-ABT	64K	8K	TQFP32	-40°C to +105°C	Yes
ATSAMDA1E16A-MBT	64K	8K	QFN32	-40°C to +105°C	Yes
ATSAMDA1G14A-ABT	16K	4K	TQFP48	-40°C to +105°C	Yes
ATSAMDA1G14A-MBT	16K	4K	QFN48	-40°C to +105°C	Yes
ATSAMDA1G15A-ABT	32K	4K	TQFP48	-40°C to +105°C	Yes
ATSAMDA1G15A-MBT	32K	4K	QFN48	-40°C to +105°C	Yes
ATSAMDA1G16A-ABT	64K	8K	TQFP48	-40°C to +105°C	Yes
ATSAMDA1G16A-MBT	64K	8K	QFN48	-40°C to +105°C	Yes
ATSAMDA1J14A-ABT	16K	4K	TQFP64	-40°C to +105°C	Yes
ATSAMDA1J15A-ABT	32K	4K	TQFP64	-40°C to +105°C	Yes
ATSAMDA1J16A-ABT	64K	8K	TQFP64	-40°C to +105°C	Yes

For more information on the SAM DA1 series, go to http://www.atmel.com/products/automotive/automotive_microcontrollers/default.aspx



Atmel | Enabling Unlimited Possibilities®



Atmel Corporation 1600 Technology Drive, San Jose, CA 95110 USA **T:** (+1)(408) 441.0311 **F:** (+1)(408) 436.4200 | www.atmel.com

© 2015 Atmel Corporation. / Rev.: Atmel-45130B-SAM-DA1_E_US_032015

Atmel® Atmel logo and combinations thereof, Enabling Unlimited Possibilities® and others are registered trademarks or trademarks of Atmel Corporation in U.S. and other countries. ARM®, ARM Connected® logo and others are the registered trademarks or trademarks of ARM Ltd. Other terms and product names may be trademarks of others.

Disclaimer: The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. EXCEPT AS SET FORTH IN THE ATMEL TERMS AND CONDITIONS OF SALES LOCATED ON THE ATMEL WEBSITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS AND PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and products descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Atmel products are not suitable for, and shall not be used in, automotive applications. Atmel products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View ATSAMDA1-XPRO](#) on WIN SOURCE
- ⊖ [Microchip Technology](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management