


Sales Outline DrawingRevision **B****Specifications:**

Oscillation Frequency (Hz)	2600 ± 200
Operating Voltage (Vp-p)	1.1 ~ 3.0
Rated Voltage (Vp-p)	1.5
Current Consumption Max. (mA)	30 at Rated Voltage
Sound Pressure Level (dB/min)	85 at 10cm at Rated Voltage
Coil Resistance (Ω)	15 ± 3
Operating Temperature (°C)	-30 ~ +70
Storage Temperature (°C)	-40 ~ +80
Lead Pin	Tin Plated Brass
Housing	PPO plastic resin (Color : Black)
Weight (Grams)	1.6
Options	For other options contact factory

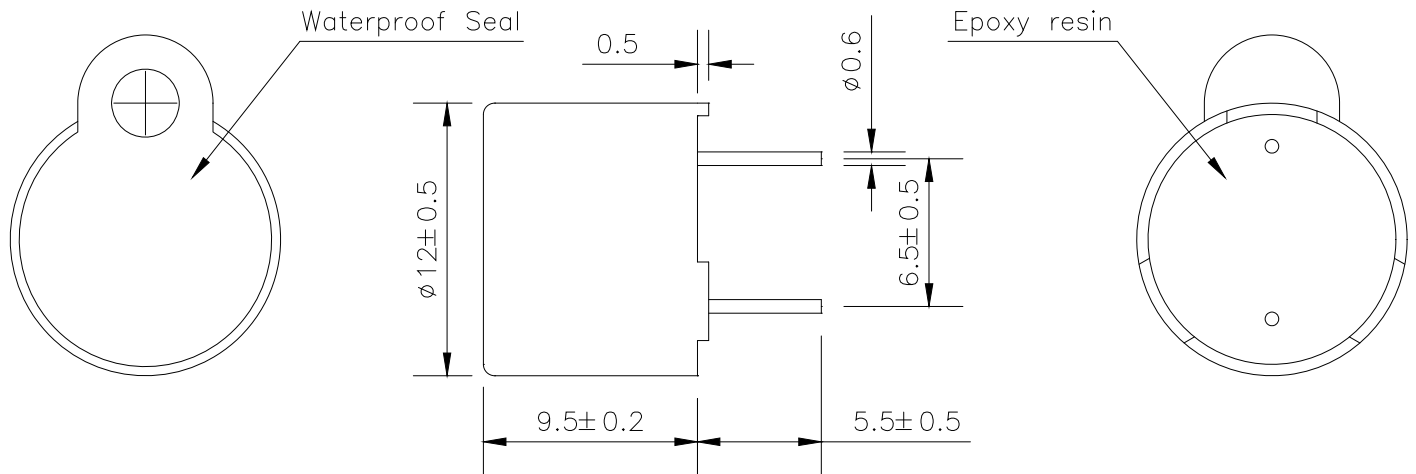

Dimensions: (units: mm)

PS: Vp-p = 1/2duty, square wave

ROHS Compliant

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View PB-1226PEAQ on WIN SOURCE](#)
-  [Mallory Sonalert Products Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management