




THE DATASHEET OF PRT3S-M0



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

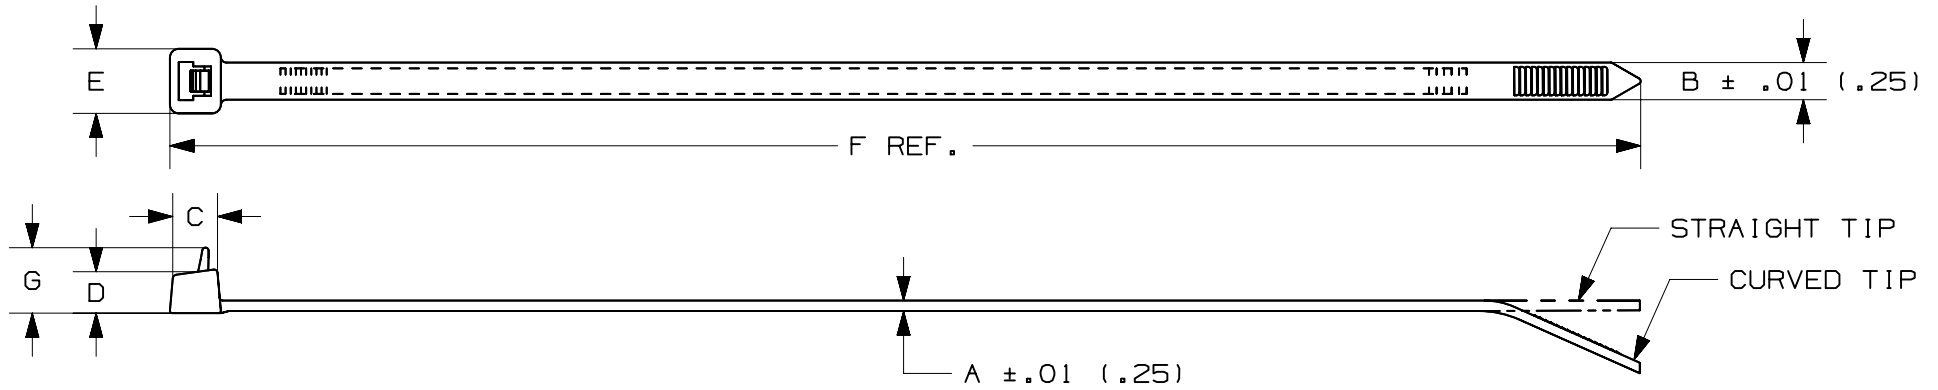

PANDUIT * PART NO.	BUNDLE DIA.		A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	G in. (mm)	MIN. LOOP TENSILE lbs (N)	CROSS- SECTION	TIP STYLE	WEIGHT lbs/100pcs (g)
	MIN in (mm)	MAX in (mm)											
PRT1S	.06 (1.5)	1.00 (25)	.052 (1.3)	.190 (4.8)	.258 (6.5)	.219 (5.6)	.316 (8.0)	4.8 (122)	.318 (8.1)	50 (222)	STANDARD	CURVED	.13 (59)
PRT1.5S	.06 (1.5)	1.50 (38)	.052 (1.3)	.190 (4.8)	.258 (6.5)	.219 (5.6)	.316 (8.0)	6.3 (160)	.318 (8.1)	50 (222)	STANDARD	CURVED	.26 (119)
PRT2S	.06 (1.5)	1.88 (48)	.052 (1.3)	.190 (4.8)	.258 (6.5)	.219 (5.6)	.316 (8.0)	7.4 (188)	.318 (8.1)	50 (222)	STANDARD	CURVED	.29 (132)
PRT3S	.06 (1.5)	3.00 (76)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.219 (5.6)	.337 (8.6)	11.5 (292)	.318 (8.1)	50 (222)	STANDARD	CURVED	.45 (205)
PRT4S	.06 (1.5)	4.00 (102)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.219 (5.6)	.337 (8.6)	14.5 (368)	.318 (8.1)	50 (222)	STANDARD	CURVED	.56 (255)


* SEE www.panduit.com FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 2	SIZE
14	11.17.14	BDK	MPH	JADE	UPDATED TITLE BORDER AND UPDATED NOTES	SS-4472	CEW	7-31-85	HVP	NONE	SHT 1 OF 2	A

TITLE		PAN-TY CABLE TIES RELEASABLE SERIES	
ITEM REVISION NAME		CUSTOMER DRAWING	
DATASET FILE NAME		10B0150P/00	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		PANDUIT	
.x ± .xx ± .02 [.5]		MATERIAL: NYLON 6.6	
.xxx ± .020 [.51]		DRAWING NUMBER: SS-4472	
ANGLES ±		THIRD ANGLE PROJECTION	

D10100DA/16

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

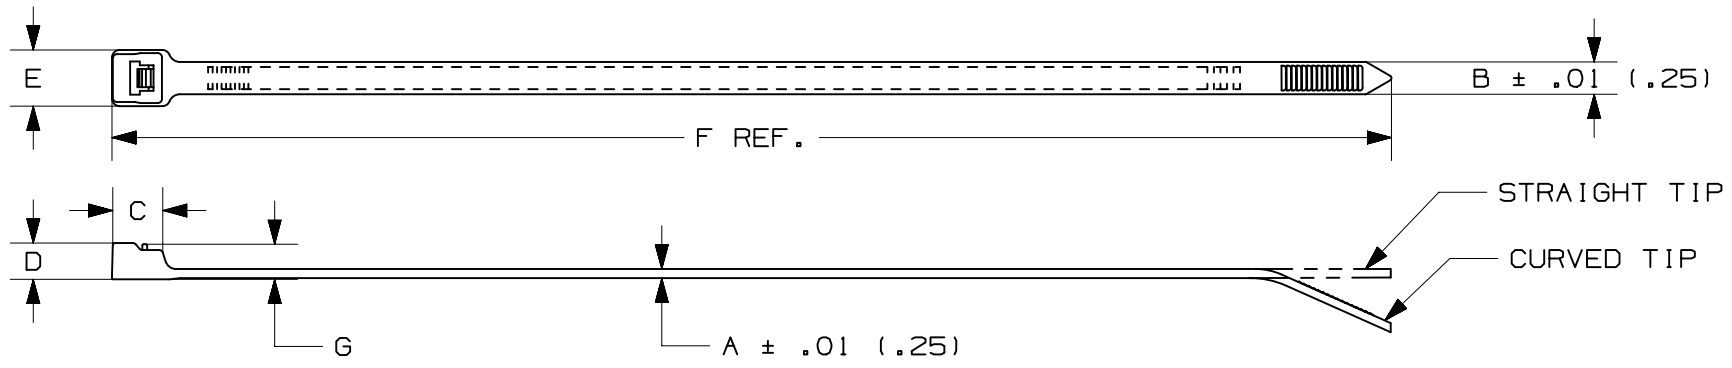

PANDUIT * PART NO.	BUNDLE DIA.		A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	G in. (mm)	MIN. LOOP TENSILE lbs (N)	CROSS-SECTION	TIP STYLE	WEIGHT lbs/100pcs (g)
	MIN in (mm)	MAX in (mm)											
PRT2H	.188 (4.8)	2.00 (51)	.075 (1.9)	.300 (7.6)	.413 (10.5)	.300 (7.6)	.480 (12.2)	8.4 (213)	.430 (10.9)	80 (356)	HEAVY	STRAIGHT	.76 (346)
PRT3H	.188 (4.8)	3.00 (76)	.075 (1.9)	.300 (7.6)	.413 (10.5)	.300 (7.6)	.480 (12.2)	11.4 (290)	.430 (10.9)	80 (356)	HEAVY	STRAIGHT	1.04 (473)
PRT4H	.188 (4.8)	4.00 (102)	.075 (1.9)	.300 (7.6)	.413 (10.5)	.300 (7.6)	.480 (12.2)	14.5 (368)	.430 (10.9)	80 (356)	HEAVY	STRAIGHT	1.28 (581)

* SEE www.panduit.com FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE	ITEM REVISION NAME	DATASET FILE NAME	MATERIAL	DRAWING NUMBER	
14	11.17.14	BDK	MPH	JADE	UPDATED TITLE BORDER AND UPDATED NOTES	SS-4472	PAN-TY CABLE TIES RELEASESLE SERIES CUSTOMER DRAWING	10B0150P/00	10B0150P_DC_PRT/00A	NYLON 6.6	SS-4472	
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		DRAWING NUMBER:			
							.x ± .xx ± .02 [.5]		DRAWING NUMBER:			
							.xxx ± .020 [.51]		DRAWING NUMBER:			
							ANGLES ±		DRAWING NUMBER:			
							THIRD ANGLE PROJECTION		DRAWING NUMBER:			
							DRAWN BY: CEW		DATE: 7-31-85		SHT 2 OF 2	
							CHK: HVP		SCALE: NONE		SIZE: A	

D10100DA/16

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PRT3S-M0 on WIN SOURCE](#)

 [Panduit Corp](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management