



**THE DATASHEET OF
SDF DF110S**



SDF



CANTHERM

Supplying high-quality bimetal and thermal sensor products.

Thermal Cut-Offs



SDF



Our Thermal Cut-Offs (Organic Thermal Element Type) are used to prevent fires caused by abnormal heat generation from circuits and other heat producing electrical products. They are a non-resettable thermal fuse which open electrical contacts when temperatures exceed the specified level.

Operating Principle

When the ambient temperature rises to the functioning temperature, the thermal element melts and the springs move the contact away and open the circuit permanently.

Applications

- Electric home appliances and heating devices
- Coil-winding products and power supplies
- Office equipment and telecommunication devices
- Automobiles & other electronic components


Cautions

- Bends in leads should be at least 3mm from the body of the TCO.
- Extreme caution must be used while soldering, use a heatsink and avoid heating above $T_f - 24^\circ\text{C}$.
- The metal portion of the TCO is electrically live and may require insulation.
- Do not use in liquids or poisonous gasses such as sulfuric acid or nitrous oxide.
- Do not connect heater directly to the cutoff.

Approvals

UL & cUL: E117626
 VDE: 115369, 116219
 PSE: JET2926-32001-1001-1009
 CCC: 2003010205079617
 EK: HH05009-2004A-2019A

Dimensions

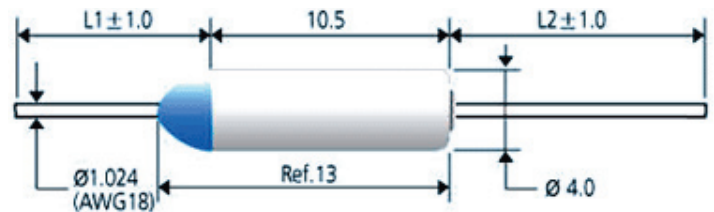

Type	A (L1)	B (L2)
Standard	25.4	35.0
Long	35.0	35.0
Option	Custom made	Custom made



EU DIRECTIVE 2011/65/EU (RoHS II)



Part No.	UL/cUL	VDE	CCC	PSE	T _F (°C)	T _H (°C)
DF66S	O	O	O	O	66	42
DF72S	O	O	O	O	72	50
DF77S	O	O	O	O	77	55
DF84S	O	O	O	O	84	60
DF91S	O	O	O	O	91	67
DF98S	O	O	O	O	98	76
DF100S	O	O	O	O	100	78
DF104S	O	O	O	O	104	80
DF110S	O	O	O	O	110	86
DF115S	-	-	-	-	115	95
DF119S	O	O	O	O	119	95
DF121S	-	-	-	-	121	95
DF128S	O	O	O	O	128	106
DF132S	-	-	-	-	132	110
DF139S	O	-	-	O	139	117
DF141S	O	O	O	O	141	117
DF144S	O	O	O	O	144	120
DF152S	O	O	O	O	152	128
DF167S	O	O	O	O	167	142
DF169S	-	-	-	O	169	145
DF170S	O	O	O	O	170	146
DF179S	-	-	-	O	179	155
DF184S	O	O	O	O	184	160
DF192S	O	O	O	O	192	162
-----	-	-	-	--	----	----
-----	-	-	-	--	----	----
DF216S	-	O	O	O	216	191
DF222S	-	-	-	O	222	195
DF228S	O	O	O	O	228	193
DF240S	O	O	O	O	240	200
DF260S	-	-	-	O	260	220
DF280S	--	-	-	O	280	230

T_F = Functioning Temperature T_H = Holding Temperature

Rated Voltage & Current Max.	
EK	250V/15A
UL/cUL	125V/15A
	250V/10A
	250V/16A
VDE	250V/15A
PSE	125V/15A
	250V/15A
CCC	250V/15A

Before fusing off



After fusing off




O	APPROVED
-	APPLIED FOR
TOLERANCE: +0°C, -5°C	

Determine the Proper Series

- T_p : The highest temperature of the product to which a cutoff is to be attached.
- T_h : The safe temperature range for use of the cutoff.
- T_s : 24°C ($T_p - T_h$) (Apply 35°C for T_s value when T_p is higher than 170°C .)
- T_o : The heating temperature caused by electrical load (Please refer temperature / current correlation curve)
- $+a$:
 1. Self heating of lead wire
 2. Structure of ventilation or airtightness
 3. Location of connecting terminal
 4. Thickness of insulated covering material
 5. Best condition value considering electric voltage changes

Temperature ($^{\circ}\text{C}$)

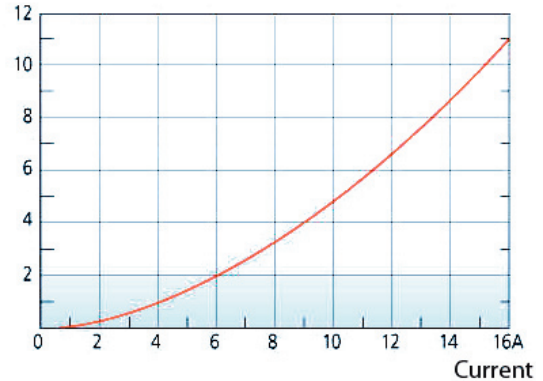

$T_p + T_s + T_o + a = \text{Applicable Temperature}$

Safe Temperature Range

- The increasing temperature by remaining heat in the cutoff after melting is required to remain below T_m .
- The temperature of the area where a cutoff will be attached should not reach over T_h under normal usage conditions.


T_m (maximum temperature)

T_f (functioning temperature)

T_h (holding temperature)

Thermostat's control range

Actual temperature range

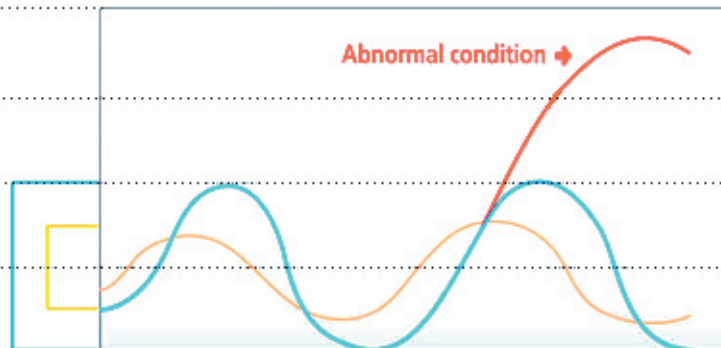

CANTHERM

Supplying high-quality bimetal and thermal sensor products.

8415 Mountain Sights Avenue • Montreal (Quebec), H4P 2B8, Canada

Tel: (514) 739-3274 • 1-800-561-7207 • Fax: (514) 739-2902 • E-mail: sales@cantherm.com

Website: www.cantherm.com | Division of Microtherm

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SDF DF110S on WIN SOURCE](#)

 [Cantherm Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management