



**THE DATASHEET OF  
SPD74R-223M**




**SERIES**

**SPD73R  
SPD74R**

RoHS  
Compliant  
Traditional  
First Quality

**Shielded Surface Mount Inductors**

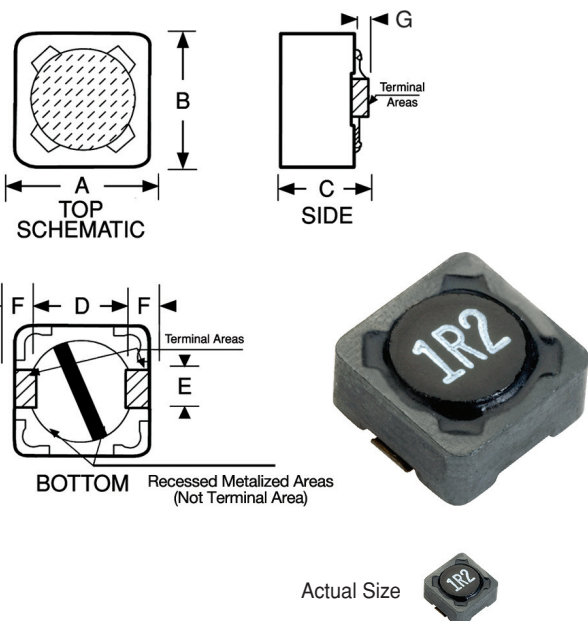

**Physical Parameters**

	Inches	Millimeters
A	0.287 ± .020	7.3 ± 0.5
B	0.287 ± .020	7.3 ± 0.5
C	0.185 Max.	4.7 Max. (Series SPD74)
C	0.153 Max.	3.9 Max. (Series SPD73)
D	0.200 ± 0.020	5.0 ± 0.5
E	0.088 ± 0.020	2.2 ± 0.5
F	0.042 ± 0.020	1.0 ± 0.5
G	0.015 Ref. only	0.38 Ref. only

**Mechanical Configuration** Units designed for surface mounting; ferrite core and ferrite sleeve

**Operating temperature range** -55°C to +125°C

**Application Frequency Range**

Values 1.2µH to 10µH to 1.0 MHz Min.  
Values above 10µH to 300 kHz Min.

**Current Rating at 25°C Ambient** The maximum DC current that will cause a 40°C maximum temperature rise and where the inductance will not decrease by more than 10% from its zero DC value

**Marking** For values lower than 10 µH the R indicates a decimal point and the remaining digits indicate the inductance in µH. For values 10 µH and above, the first two digits indicate the inductance in µH and the third digit indicates the number of trailing zeros where a zero indicates that there are no trailing zeros.

Example: SPD73R-122M (1.2 µH)  
1R2

Example: SPD74R-105M (1,000 µH)  
102

**Packaging** Tape & reel (16mm):

13" reel, 1000 pieces max.; 7" reel not available

**Note:** No vias and traces in restricted area.

DASH NUMBER\*  
INDUCTANCE (µH) ±20%  
TEST FREQUENCY (kHz)  
DC RESISTANCE MAXIMUM (OHMS)  
CURRENT RATING MAXIMUM (A DC)

**SERIES SPD73R FERRITE CORE & SLEEVE**

-122M	1.2	100	0.020	3.40
-242M	2.4	100	0.032	2.69
-352M	3.5	100	0.035	2.60
-472M	4.7	100	0.050	2.15
-682M	6.8	100	0.065	1.90
-103M	10	100	0.067	1.90
-123M	12	1.0	0.080	1.70
-153M	15	1.0	0.091	1.59
-183M	18	1.0	0.14	1.28
-223M	22	1.0	0.19	1.10
-273M	27	1.0	0.21	1.05
-333M	33	1.0	0.24	0.981
-393M	39	1.0	0.32	0.850
-473M	47	1.0	0.36	0.801
-563M	56	1.0	0.47	0.701
-683M	68	1.0	0.52	0.667
-823M	82	1.0	0.69	0.579
-104M	100	1.0	0.79	0.541
-124M	120	1.0	0.84	0.524
-154M	150	1.0	0.89	0.510
-184M	180	1.0	1.45	0.399
-224M	220	1.0	1.65	0.374
-274M	270	1.0	2.31	0.316
-334M	330	1.0	2.62	0.297
-394M	390	1.0	2.94	0.280
-474M	470	1.0	4.18	0.235
-564M	560	1.0	4.67	0.222
-684M	680	1.0	5.73	0.201
-824M	820	1.0	6.54	0.188
-105M	1000	1.0	9.44	0.156

**SERIES SPD74R FERRITE CORE & SLEEVE**

-122M	1.2	100	0.025	4.40
-242M	2.4	100	0.03	4.00
-352M	3.5	100	0.034	3.70
-472M	4.7	100	0.038	3.50
-682M	6.8	100	0.042	3.40
-103M	10	100	0.049	2.50
-123M	12	1.0	0.058	2.40
-153M	15	1.0	0.081	2.30
-183M	18	1.0	0.091	2.15
-223M	22	1.0	0.11	2.00
-273M	27	1.0	0.15	1.70
-333M	33	1.0	0.17	1.50
-393M	39	1.0	0.23	1.35
-473M	47	1.0	0.26	1.30
-563M	56	1.0	0.35	1.10
-683M	68	1.0	0.38	1.05
-823M	82	1.0	0.43	1.00
-104M	100	1.0	0.61	0.86
-124M	120	1.0	0.66	0.84
-154M	150	1.0	0.88	0.70
-184M	180	1.0	0.98	0.68
-224M	220	1.0	1.17	0.60
-274M	270	1.0	1.64	0.53
-334M	330	1.0	1.86	0.50
-394M	390	1.0	2.85	0.40
-474M	470	1.0	3.01	0.39
-564M	560	1.0	3.62	0.36
-684M	680	1.0	4.63	0.32
-824M	820	1.0	5.2	0.30
-105M	1000	1.0	6.0	0.28

\*Complete part # must include series # PLUS the dash #

For surface finish information, refer to [www.delevanfinishes.com](http://www.delevanfinishes.com)

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SPD74R-223M on WIN SOURCE](#)

 [API Delevan Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management