



**THE DATASHEET OF
EP26-12-B1**





VRLA Rechargeable Battery

EP26-12



FEATURES

- Absorbent Glass Mat technology for efficient gas recombination
- Maintenance free(no water topping-up required)
- No free acid(Non-spillable battery)
- Can be used in any orientation(excluding used inverted)
- The battery is designed for heavy duty cyclic application
- Low self-discharge rate, lower than 3% capacity loss per month

APPLICATION

- UPS
- Golf-Carts
- Wheelchairs
- Lawn Mowers
- Electric Vehicles



SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	26Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	9600g(21.17lbs.)
Terminals	B1 (Fitting M5 bolt & nut) , T2 and I1 are optional
Internal Resistance	≤10m Ω (Fully Charged)
Max. Discharge Current	390 A (5 sec.)
Max. Charge Current	7.8 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage : -20°C~40°C(-4°F~104°F)
Container Material	Standard: ABS(UL 94-HB) EP26-12 Optional: Flame Retardant ABS(UL 94-V0) EP26-12FR





- IEC 61056-1
- JIS C 8702-1
- GB/T 19639.1

DIMENSION(mm/inch)

OUTER DIMENSIONS

TERMINAL TYPE

- **Length**
175±1.5 (6.89±0.06)
- **Width**
166±1.5 (6.54±0.06)
- **Container Height**
125±1.5 (4.92±0.06)
- **Total Height**
125±1.5 (4.92±0.06)

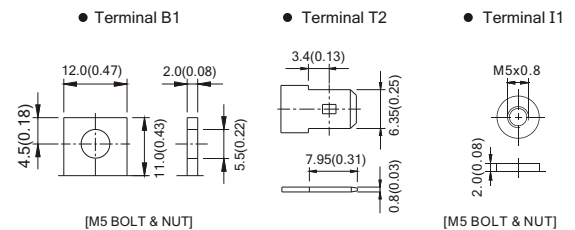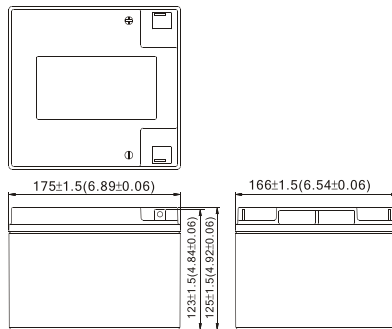

Terminal Hardware Initial Torque: B1 (2.5Nm±5%),I1(4.0Nm±5%)

Constant power discharge characteristics at 25 °C/77 °F

Unit: W

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	847.0	636.6	515.5	310.1	179.8	75.8	52.4	29.19	15.26
1.75V	981.0	689.7	539.7	322.0	185.0	77.3	53.1	29.64	15.60
1.70V	1040.0	714.6	556.0	329.1	188.3	78.0	53.5	29.79	15.67
1.65V	1088.0	731.7	569.0	333.9	190.9	78.7	53.9	29.86	15.71
1.60V	1122.0	746.2	580.2	337.3	192.8	79.1	53.9	29.86	15.71

Constant current discharge characteristics at 25 °C/77 °F



Unit: A

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	76.3	56.0	44.8	26.3	15.1	6.32	4.37	2.43	1.27
1.75V	90.0	60.7	46.9	27.3	15.5	6.44	4.43	2.47	1.30
1.70V	95.4	62.9	48.3	27.9	15.8	6.50	4.46	2.48	1.31
1.65V	99.8	64.4	49.5	28.3	16.0	6.56	4.49	2.49	1.31
1.60V	102.9	65.7	50.5	28.6	16.2	6.59	4.49	2.49	1.31







All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View EP26-12-B1 on WIN SOURCE](#)
-  [B B Battery Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management