




THE DATASHEET OF HX2260FNL




) WITH FLAMMABILITY
) +125°C



ITY AT 245°C REFLOW PROFILE


MOISTURE SENSITIVE

MAXIMUM THROUGH REFLOW SOLDER



NG ADD A "T" SUFFIX

FNL BECOMES HX2260FNLT).



FINAL OUTLINE


All rights reserved. Pulse confidential & proprietary. (06/12/14)

TLA DRAWING HX2260FNL-10	PS DRAWING PS-2005.002-D	SHEET 1 OF 3	PART NO. HX2260FNL	DATASHEET REV. A
-----------------------------	-----------------------------	-----------------	-----------------------	---------------------

ELECTRICAL CHARACTERISTICS AT +25°C UNLESS OTHER SPECIFIED
MEETS IEEE 802.3 SPECIFICATION





PARAMETER	SPECIFICATIONS		
OPERATING TEMPERATURE	-40°C ~ +85°C		
TURNS RATIO	1 : 1 ± 2%		
POLARITY	PER SCHEMATIC		
INSERTION LOSS	100 KHZ	1-125 MHZ	
	-1.2 DB MAX	-0.2-0.002*f ^{1.4} DB MAX	
RETURN LOSS	.1-30 MHZ	30-60 MHZ	60-80 MHZ
(Z OUT = 100 OHM ±15%)	-16 DB MIN	-10+20*LOG ₁₀ (f/60) DB MIN	-10 DB MIN
INDUCTANCE (OCL)	(MEASURED AT 100 KHZ, 100 mVRMS)		
(MEDIA SIDE, -40°C TO +85°C)	350 UH MIN		
	1 MHZ	10-100 MHZ	
CROSSTALK, ADJACENT CHANNELS	-50 DB MIN	-55+22*LOG ₁₀ (f/10) DB MIN	
	2 MHZ	30-100 MHZ	
DIFFERENTIAL TO COMMON MODE REJECTION	-50 DB MIN	-43+22*LOG ₁₀ (f/30) DB MIN	
DC RESISTANCE, 1/2 WINDING	.65 OHMS MAX		
DC RESISTANCE IMBALANCE	±.065 OHMS MAX (CENTER TAP SYMMETRY)		
INPUT - OUTPUT ISOLATION	1500 VRMS MIN @ 60 SECONDS		

NOTE: f IS FREQUENCY IN MHZ.

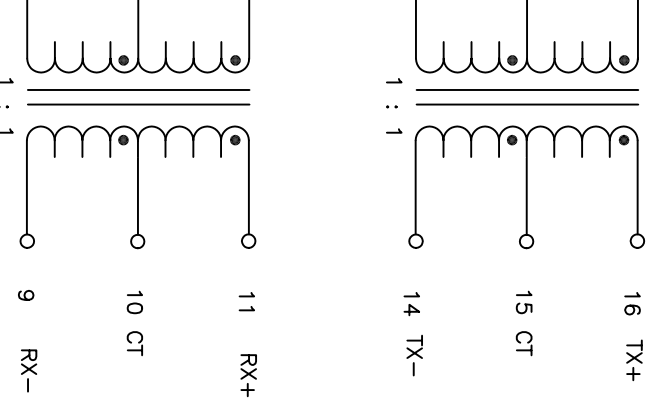

All rights reserved. Pulse confidential & proprietary. (06/12/14)

TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
HX2260FNL-10	PS-2005.002-D	2 OF 3	HX2260FNL	A

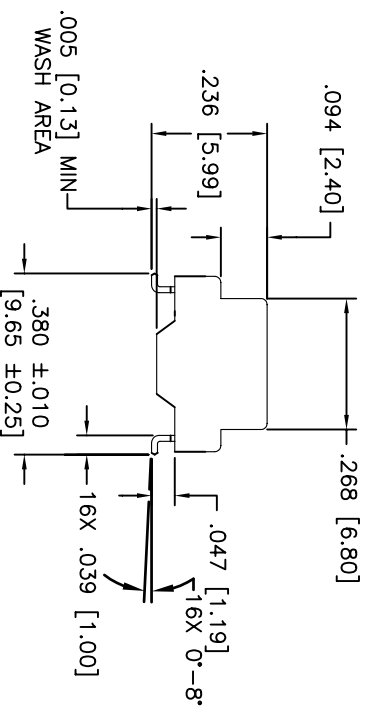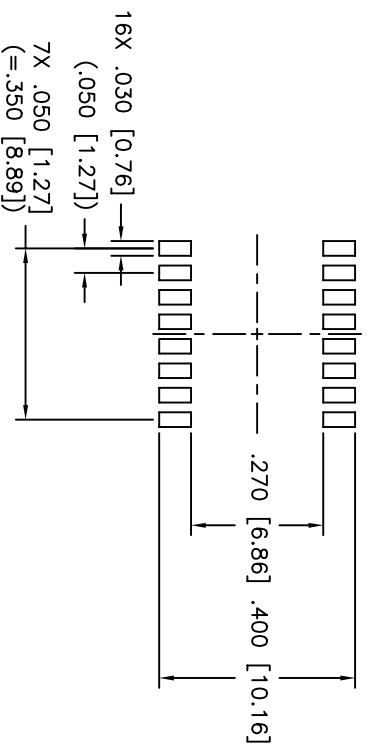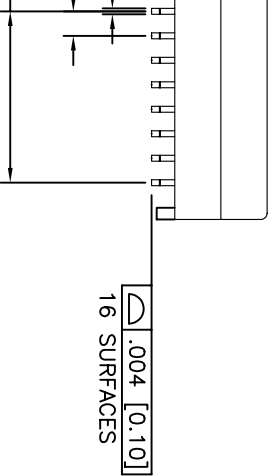



WITH THE FOLLOWING
REFERENCE ONLY.

All rights reserved. Pulse confidential & proprietary. (06/12/14)

ITLA DRAWING HX2260FNL-10	PS DRAWING PS-2005.002-D	SHEET 3 OF 3	PART NO. HX2260FNL	DATASHEET REV. A
------------------------------	-----------------------------	-----------------	-----------------------	---------------------

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View HX2260FNL on WIN SOURCE](#)
-  [Pulse Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management