



CMOS/ 3.3V/ 7.0×5.0mm



RoHS Compliant

Features

- Miniature ceramic package
- Highly reliable with seam welding
- CMOS output
- Supply voltage $V_{CC}=3.3V$
- $\pm 25 \times 10^{-6}$, $\pm 20 \times 10^{-6}$ available

Table 1

Stability		Operating Temperature Range (°C)	Note
Code	$\times 10^{-6}$		
0	± 50	-10 to +70	Standard specifications
S	± 30		
U	± 25		
W	± 20		
F	± 100	-40 to +85	Please contact us for available frequencies.
G	± 50		
6	± 50	-40 to +105	

How to Order

KC7050A 25.0000 C 3 □ E 00
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series
- ② Output Frequency
- ③ Output Type (CMOS)
- ④ Supply Voltage (3.3V)
- ⑤ Frequency Tolerance (See Table 1)
- ⑥ Symmetry/ INH Function (45/ 55%)
- ⑦ Individual Specification (STD Specification is "00")

Packaging (Tape & Reel 1000 pcs./ reel)


Specifications

Item	Symbol	Conditions	Min.	Max.	Units	
Output Frequency Range	f_o		1.8	170	MHz	
Frequency Tolerance	f_{tol}	Initial tolerance, Operating temperature range, Rated power supply voltage change, Load change, Aging (1 year @25°C), Shock and vibration	Temp.: -40 to +85°C	-100	+100	$\times 10^{-6}$
			Temp.: -10 to +70°C / -40 to +85°C / -40 to +105°C	-50	+50	
			Temp.: -10 to +70°C	-30	+30	
			Temp.: -10 to +70°C	-25	+25	
Storage Temperature Range	T_{stg}		-55	+125	°C	
Operating Temperature Range	T_{use}	Standard Specifications	-10	+70	°C	
		Extend (Option)	-40	+85		
Max. Supply Voltage	—	$f_o < 135\text{MHz}$	-0.5	+7.0	V	
		$f_o \geq 135\text{MHz}$	-0.5	+5.0		
Supply Voltage	V_{CC}	Freq. Tol.Code: 0, S, F	+2.97	+3.63	V	
		Freq. Tol.Code: U, G, 6	+3.14	+3.46		
		Freq. Tol.Code: W	+3.20	+3.40		
Current Consumption (Maximum Loaded)	I_{CC}	$1.8 \leq f_o \leq 20\text{MHz}$	—	10	mA	
		$20 < f_o \leq 40\text{MHz}$	—	15		
		$40 < f_o \leq 60\text{MHz}$	—	30		
		$60 < f_o \leq 100\text{MHz}$	—	35		
		$100 < f_o \leq 135\text{MHz}$	—	45		
Stand-by Current	I_{std}		—	10	μA	
Symmetry	SYM	@50% V_{CC}	45	55	%	
Rise/ Fall Time (10% V_{CC} to 90% V_{CC} Maximum Loaded)	T_r / T_f	$1.8 \leq f_o \leq 26\text{MHz}$	—	10	ns	
		$26 < f_o \leq 45\text{MHz}$	—	8		
		$45 < f_o \leq 100\text{MHz}$	—	5		
		$100 < f_o \leq 170\text{MHz}$	—	2.5		
Low Level Output Voltage	V_{OL}	$I_{OL} = 8\text{mA}$	—	10% V_{CC}	V	
High Level Output Voltage	V_{OH}	$I_{OH} = -8\text{mA}$	90% V_{CC}	—	V	
CMOS Load	L_CMOS	CMOS Output	—	15	pF	
Input Voltage Range	V_{IN}		0	V_{CC}	V	
Low Level Input Voltage	V_{IL}		—	30% V_{CC}	V	
High Level Input Voltage	V_{IH}		70% V_{CC}	—	V	
Disable Time	t_{dis}		—	150	ns	
Enable Time	t_{ena}		—	5	ms	
Start-up Time	t_{str}	@Minimum operating voltage to be 0 sec.	—	10	ms	
1 Sigma Jitter	J_{σ}	Measured with Wavecrest SIA-3000	$1.8 \leq f_o < 40\text{MHz}$	—	8	ps
			$40 \leq f_o \leq 100\text{MHz}$	—	5	
			$100 < f_o \leq 170\text{MHz}$	—	4	
Peak to Peak Jitter	J_{PK-PK}	Measured with Wavecrest SIA-3000	$1.8 \leq f_o < 40\text{MHz}$	—	80	ps
			$40 \leq f_o \leq 100\text{MHz}$	—	40	
			$100 < f_o \leq 170\text{MHz}$	—	30	

Note: All electrical characteristics are defined at the maximum load and operating temperature range. Please contact us for inquiry about operating temperature range, available frequencies and other conditions.


Dimensions

(Unit: mm)

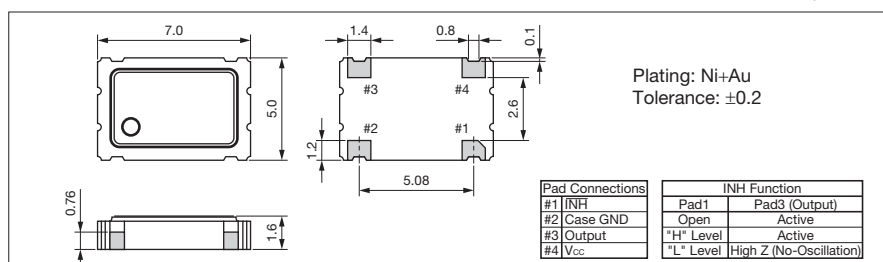

Recommended Land Pattern

(Unit: mm)

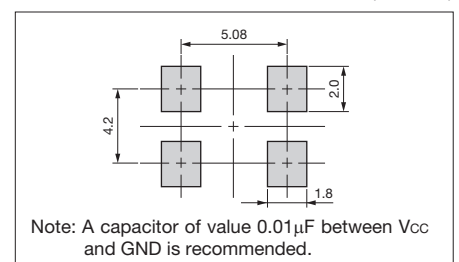

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View KC7050A33.3333C3GE00 on WIN SOURCE](#)
- [AVX Corp/Kyocera Corp Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management