



THE DATASHEET OF SLA2200



SLA Series



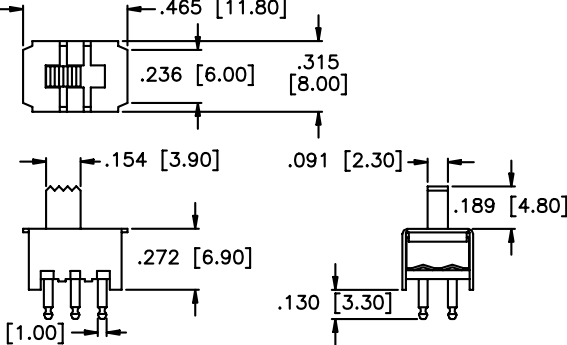
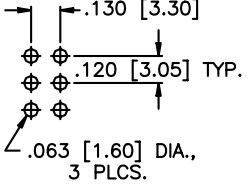
Miniature Slide Switches

| SPECIFICATIONS | FEATURES |
|---|--|
| <p>Contact ratings: 500 mA at 125 VAC</p> <p>Initial contact resistance: 20 milliohms max.</p> <p>Insulation resistance: 100 megohms min. at 500 VDC</p> <p>Dielectric strength: 500 volts RMS for 1 minute</p> <p>Electrical life: 10,000 cycles min.</p> <p>Operating temperature range: -20°C to +85°C</p> <p>Actuation force: 350g ± 200g</p> <p>Solder heat resistance: 260°C max. for 3 seconds</p> <p>Solvent washing permissible</p> | <ul style="list-style-type: none"> ● Miniature compact size. ● Wash-through open frame construction. ● Panel and p.c. mounting models. |
| MATERIALS | |
| <p>Contacts & terminals: Silver plated brass</p> <p>Frame: Zinc plated steel</p> <p>Actuator: PBT Thermoplastic</p> <p>Base: Phenolic laminated sheet</p> | |

| | | |
|--|--|--|
| <p style="background-color: #f2f2f2; padding: 2px;">MODEL NO.</p> <p style="color: red; font-weight: bold; padding: 2px;">SLA1200</p> | <p style="font-size: 1.2em; font-weight: bold;">1P2T</p> <p>● = COMMON</p> | <p style="font-size: 0.8em;">.106 (2.70) TRAVEL/THROW</p> <p style="font-size: 0.8em;">.748 [19.00] .591 [15.00] .220 [5.60]</p> <p style="font-size: 0.8em;">.087 [2.20] DIA., 2 PLCS. .228 [5.80]</p> <p style="font-size: 0.8em;">.122 [3.10] .232 [5.90]</p> <p style="font-size: 0.8em;">.118 [3.00] .126 [3.20] .130 [3.30]</p> <p style="font-size: 0.8em;">.118 [3.00] TYP. .063 [1.60] DIA., 3 PLCS.</p> <p style="font-size: 0.8em;">SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT</p> |
| <p style="background-color: #f2f2f2; padding: 2px;">MODEL NO.</p> <p style="color: red; font-weight: bold; padding: 2px;">SLA1201</p> | <p style="font-size: 1.2em; font-weight: bold;">1P2T</p> <p>● = COMMON</p> | <p style="font-size: 0.8em;">.106 (2.70) TRAVEL/THROW</p> <p style="font-size: 0.8em;">.465 [11.80] .220 [5.60]</p> <p style="font-size: 0.8em;">.228 [5.80]</p> <p style="font-size: 0.8em;">.122 [3.10] .232 [5.90]</p> <p style="font-size: 0.8em;">.118 [3.00] .126 [3.20] .130 [3.30]</p> <p style="font-size: 0.8em;">.118 [3.00] TYP. .063 [1.60] DIA., 3 PLCS.</p> <p style="font-size: 0.8em;">SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT</p> |
| <p style="background-color: #f2f2f2; padding: 2px;">MODEL NO.</p> <p style="color: red; font-weight: bold; padding: 2px;">SLA2200</p> | <p style="font-size: 1.2em; font-weight: bold;">2P2T</p> <p>● = COMMON</p> | <p style="font-size: 0.8em;">.106 (2.70) TRAVEL/THROW</p> <p style="font-size: 0.8em;">.764 [19.40] .563 [14.30] .315 [8.00]</p> <p style="font-size: 0.8em;">.138 [3.50] .264 [6.70]</p> <p style="font-size: 0.8em;">.098 [2.50] DIA., 2 PLCS. .091 [2.30] .189 [4.80]</p> <p style="font-size: 0.8em;">.272 [6.90] .130 [3.30]</p> <p style="font-size: 0.8em;">.130 [3.30] .120 [3.05] .063 [1.60] DIA., 3 PLCS.</p> <p style="font-size: 0.8em;">SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT</p> |

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

| | | | |
|---|---|--|---|
| MODEL NO. | 2P2T | | |
| SLA2201 | | | |
|  |  <p>● = COMMON</p> |  |  |
| | SCHEMATIC | MECHANICAL OUTLINE | P.C. BOARD LAYOUT |





Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View SLA2200 on WIN SOURCE](#)
-  [Apem Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management