



**THE DATASHEET OF
LT1630CN8#PBF**



30MHz, 10V/ μ s, Dual/Quad Rail-to-Rail Input and Output Precision Op Amps

FEATURES

- **Gain-Bandwidth Product: 30MHz**
- **Slew Rate: 10V/ μ s**
- **Low Supply Current per Amplifier: 3.5mA**
- Input Common Mode Range Includes Both Rails
- Output Swings Rail-to-Rail
- Input Offset Voltage, Rail-to-Rail: 525 μ V Max
- Input Offset Current: 150nA Max
- Input Bias Current: 1000nA Max
- Open-Loop Gain: 1000V/mV Min
- Low Input Noise Voltage: 6nV/ $\sqrt{\text{Hz}}$ Typ
- Low Distortion: -91dBc at 100kHz
- Wide Supply Range: 2.7V to \pm 15V
- Large Output Drive Current: 35mA Min
- Dual in 8-Pin PDIP and SO Packages
- Quad in Narrow 14-Pin SO Package

APPLICATIONS

- Active Filters
- Rail-to-Rail Buffer Amplifiers
- Driving A/D Converters
- Low Voltage Signal Processing
- Battery-Powered Systems

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks and C-Load is a trademark of Linear Technology Corporation. All other trademarks are the property of their respective owners.

DESCRIPTION

The LT[®]1630/LT1631 are dual/quad, rail-to-rail input and output op amps with a 30MHz gain-bandwidth product and a 10V/ μ s slew rate.


The LT1630/LT1631 have excellent DC precision over the full range of operation. Input offset voltage is typically less than 150 μ V and the minimum open-loop gain of one million into a 10k load virtually eliminates all gain error. To maximize common mode rejection, the LT1630/LT1631 employ a patented trim technique for both input stages, one at the negative supply and the other at the positive supply, that gives a typical CMRR of 106dB over the full input range.

The LT1630/LT1631 maintain their performance for supplies from 2.7V to 36V and are specified at 3V, 5V and \pm 15V supplies. The inputs can be driven beyond the supplies without damage or phase reversal of the output. The output delivers load currents in excess of 35mA.


The LT1630 is available in 8-pin PDIP and SO packages with the standard dual op amp pinout. The LT1631 features the standard quad op amp configuration and is available in a 14-pin plastic SO package. These devices can be used as plug-in replacements for many standard op amps to improve input/output range and performance.

TYPICAL APPLICATION

Single Supply, 400kHz, 4th Order Butterworth Filter

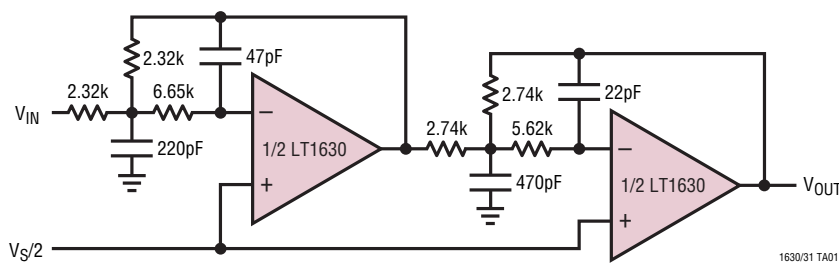

Frequency Response

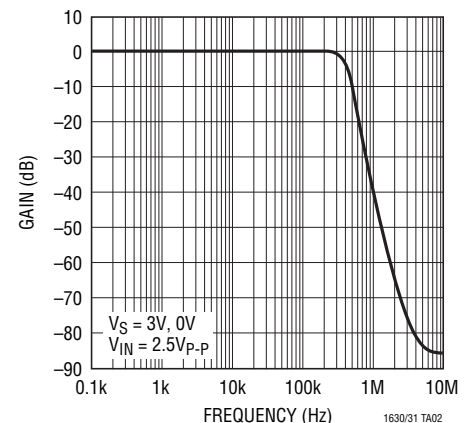


LT1630/LT1631

ABSOLUTE MAXIMUM RATINGS (Note 1)

| | | | |
|---|--|--|--|
| Total Supply Voltage (V_+ to V_-) | 36V | Specified Temperature Range (Note 4) | |
| Input Current..... | $\pm 10\text{mA}$ | C-Grade/I-Grade | -40°C to 85°C |
| Output Short-Circuit Duration (Note 2) | Continuous | H-Grade | -40°C to 125°C |
| Operating Temperature Range | | Junction Temperature | 150°C |
| C-Grade/I-Grade | -40°C to 85°C | Storage Temperature Range | -65°C to 150°C |
| H-Grade | -40°C to 125°C | Lead Temperature (Soldering, 10 sec)..... | 300°C |

PIN CONFIGURATION

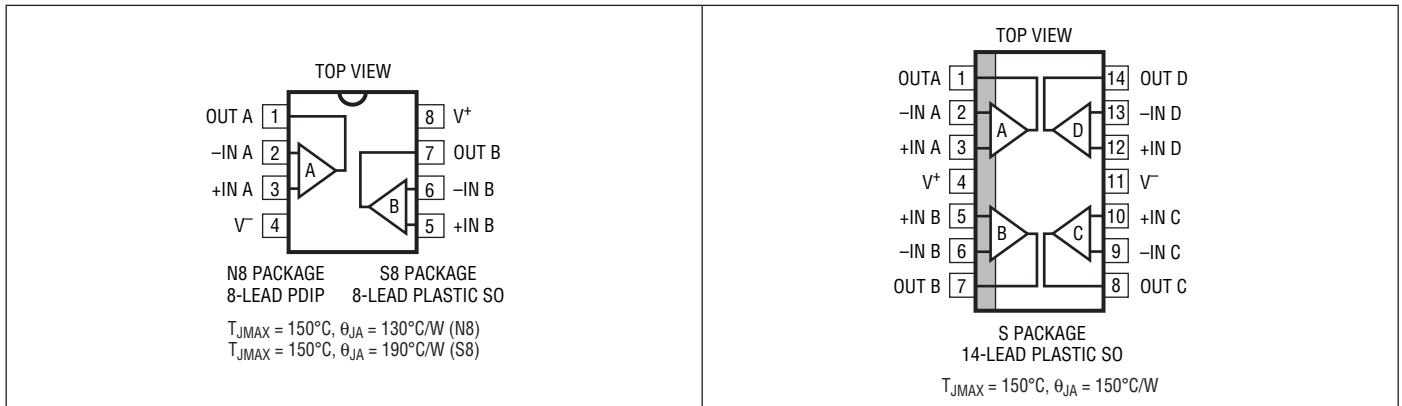

ORDER INFORMATION

| LEAD FREE FINISH | TAPE AND REEL | PART MARKING | PACKAGE DESCRIPTION | TEMPERATURE RANGE |
|------------------|-----------------|--------------|---------------------|--|
| LT1630CN8#PBF | LT1630CN8#TRPBF | LT1630CN8 | 8-Lead PDIP | -40°C to 85°C |
| LT1630CS8#PBF | LT1630CS8#TRPBF | 1630 | 8-Lead Plastic SO | -40°C to 85°C |
| LT1630IN8#PBF | LT1630IN8#TRPBF | LT1630IN8 | 8-Lead PDIP | -40°C to 85°C |
| LT1630IS8#PBF | LT1630IS8#TRPBF | 1630I | 8-Lead Plastic SO | -40°C to 85°C |
| LT1630HS8#PBF | LT1630HS8#TRPBF | 1630H | 8-Lead Plastic SO | -40°C to 125°C |
| LT1631CS#PBF | LT1631CS#TRPBF | LT1631CS | 14-Lead Plastic SO | -40°C to 85°C |
| LT1631IS#PBF | LT1631IS#TRPBF | LT1631IS | 14-Lead Plastic SO | -40°C to 85°C |

Consult LTC Marketing for parts specified with wider operating temperature ranges.

Consult LTC Marketing for information on non-standard lead based finish parts.

For more information on lead free part marking, go to: <http://www.linear.com/leadfree/>

For more information on tape and reel specifications, go to: <http://www.linear.com/tapeandreeel/>

ELECTRICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$, $V_S = 5\text{V}, 0\text{V}$; $V_S = 3\text{V}, 0\text{V}$; $V_{CM} = V_{OUT} = \text{half supply}$, unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|-----------------|---|--|----------|----------|------|------------------------|
| V_{OS} | Input Offset Voltage | $V_{CM} = V^+$ | | 150 | 525 | μV |
| | | $V_{CM} = V^-$ | | 150 | 525 | μV |
| ΔV_{OS} | Input Offset Shift | $V_{CM} = V^- \text{ to } V^+$ | | 150 | 525 | μV |
| | Input Offset Voltage Match (Channel-to-Channel) | $V_{CM} = V^-, V^+$ (Note 5) | | 200 | 950 | μV |
| I_B | Input Bias Current | $V_{CM} = V^+$ | 0 | 540 | 1000 | nA |
| | | $V_{CM} = V^-$ | -1000 | -540 | 0 | nA |
| ΔI_B | Input Bias Current Shift | $V_{CM} = V^- \text{ to } V^+$ | | 1080 | 2000 | nA |
| | Input Bias Current Match (Channel-to-Channel) | $V_{CM} = V^+$ (Note 5) $V_{CM} = V^-$ (Note 5) | | 25 | 300 | nA nA |
| I_{OS} | Input Offset Current | $V_{CM} = V^+$ | | 20 | 150 | nA |
| | | $V_{CM} = V^-$ | | 20 | 150 | nA |
| ΔI_{OS} | Input Offset Current Shift | $V_{CM} = V^- \text{ to } V^+$ | | 40 | 300 | nA |
| | Input Noise Voltage | 0.1Hz to 10Hz | | 300 | | nV _{p-p} |
| e_n | Input Noise Voltage Density | $f = 1\text{kHz}$ | | 6 | | nV/ $\sqrt{\text{Hz}}$ |
| i_n | Input Noise Current Density | $f = 1\text{kHz}$ | | 0.9 | | pA/ $\sqrt{\text{Hz}}$ |
| C_{IN} | Input Capacitance | | | 5 | | pF |
| A_{VOL} | Large-Signal Voltage Gain | $V_S = 5\text{V}, V_O = 300\text{mV to } 4.7\text{V}, R_L = 10\text{k}$ | 500 | 3500 | | V/mV |
| | | $V_S = 3\text{V}, V_O = 300\text{mV to } 2.7\text{V}, R_L = 10\text{k}$ | 400 | 2000 | | V/mV |
| CMRR | Common Mode Rejection Ratio | $V_S = 5\text{V}, V_{CM} = V^- \text{ to } V^+$ | 79 | 90 | | dB |
| | | $V_S = 3\text{V}, V_{CM} = V^- \text{ to } V^+$ | 75 | 86 | | dB |
| | CMRR Match (Channel-to-Channel) (Note 5) | $V_S = 5\text{V}, V_{CM} = V^- \text{ to } V^+$ $V_S = 3\text{V}, V_{CM} = V^- \text{ to } V^+$ | 72 | 96 | | dB dB |
| PSRR | Power Supply Rejection Ratio | $V_S = 2.7\text{V to } 12\text{V}, V_{CM} = V_O = 0.5\text{V}$ | 87 | 105 | | dB |
| | PSRR Match (Channel-to-Channel) (Note 5) | $V_S = 2.7\text{V to } 12\text{V}, V_{CM} = V_O = 0.5\text{V}$ | 80 | 107 | | dB |
| | Minimum Supply Voltage (Note 9) | $V_{CM} = V_O = 0.5\text{V}$ | | 2.6 | 2.7 | V |
| V_{OL} | Output Voltage Swing Low (Note 6) | No Load | | 14 | 30 | mV |
| | | $I_{SINK} = 0.5\text{mA}$ | | 31 | 60 | mV |
| | | $I_{SINK} = 25\text{mA}, V_S = 5\text{V}$ | | 600 | 1200 | mV |
| | | $I_{SINK} = 20\text{mA}, V_S = 3\text{V}$ | | 500 | 1000 | mV |
| V_{OH} | Output Voltage Swing High (Note 6) | No Load | | 15 | 40 | mV |
| | | $I_{SOURCE} = 0.5\text{mA}$ | | 42 | 80 | mV |
| | | $I_{SOURCE} = 20\text{mA}, V_S = 5\text{V}$ | | 900 | 1800 | mV |
| | | $I_{SOURCE} = 15\text{mA}, V_S = 3\text{V}$ | | 680 | 1400 | mV |
| I_{SC} | Short-Circuit Current | $V_S = 5\text{V}$ | ± 20 | ± 41 | | mA |
| | | $V_S = 3\text{V}$ | ± 15 | ± 30 | | mA |
| I_S | Supply Current per Amplifier | | | 3.5 | 4.4 | mA |
| GBW | Gain-Bandwidth Product (Note 7) | $f = 100\text{kHz}$ | 15 | 30 | | MHz |
| SR | Slew Rate (Note 8) | $V_S = 5\text{V}, A_V = -1, R_L = \text{Open}, V_O = 4\text{V}$ | 4.6 | 9.2 | | V/ μs |
| | | $V_S = 3\text{V}, A_V = -1, R_L = \text{Open}$ | 4.2 | 8.5 | | V/ μs |
| t_S | Settling Time | $V_S = 5\text{V}, A_V = 1, R_L = 1\text{k}, 0.01\%, V_{STEP} = 2\text{V}$ | | 520 | | ns |

LT1630/LT1631

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range of $0^{\circ}\text{C} < T_A < 70^{\circ}\text{C}$. $V_S = 5\text{V}, 0\text{V}$; $V_S = 3\text{V}, 0\text{V}$; $V_{\text{CM}} = V_{\text{OUT}} = \text{half supply}$, unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | | MIN | TYP | MAX | UNITS |
|------------------------|---|--|--------|----------|----------|------------|--------------------------------|
| V_{OS} | Input Offset Voltage | $V_{\text{CM}} = V^+ - 0.1\text{V}$ | ● | | 175 | 700 | μV |
| | | $V_{\text{CM}} = V^- + 0.2\text{V}$ | ● | | 175 | 700 | μV |
| $V_{\text{OS TC}}$ | Input Offset Voltage Drift (Note 3) | $V_{\text{CM}} = V^+ - 0.1\text{V}$ | ● | | 2.5 | 5.5 | $\mu\text{V}/^{\circ}\text{C}$ |
| | | | ● | | 1 | 3.5 | $\mu\text{V}/^{\circ}\text{C}$ |
| ΔV_{OS} | Input Offset Voltage Shift | $V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | | 175 | 750 | μV |
| | Input Offset Voltage Match (Channel-to-Channel) | $V_{\text{CM}} = V^- + 0.2\text{V}, V^+ - 0.1\text{V}$ (Note 5) | ● | | 200 | 1200 | μV |
| I_{B} | Input Bias Current | $V_{\text{CM}} = V^+ - 0.1\text{V}$ | ● | 0 | 585 | 1100 | nA |
| | | $V_{\text{CM}} = V^- + 0.2\text{V}$ | ● | -1100 | -585 | 0 | nA |
| ΔI_{B} | Input Bias Current Shift | $V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | | 1170 | 2200 | nA |
| | Input Bias Current Match (Channel-to-Channel) | $V_{\text{CM}} = V^+ - 0.1\text{V}$ (Note 5) $V_{\text{CM}} = V^- + 0.2\text{V}$ (Note 5) | ● ● | | 25 25 | 340 340 | nA nA |
| I_{OS} | Input Offset Current | $V_{\text{CM}} = V^+ - 0.1\text{V}$ | ● | | 20 | 170 | nA |
| | | $V_{\text{CM}} = V^- + 0.2\text{V}$ | ● | | 20 | 170 | nA |
| ΔI_{OS} | Input Offset Current Shift | $V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | | 40 | 340 | nA |
| A_{VOL} | Large-Signal Voltage Gain | $V_S = 5\text{V}, V_O = 300\text{mV}$ to $4.7\text{V}, R_L = 10\text{k}$ | ● | 450 | 3500 | | V/mV |
| | | $V_S = 3\text{V}, V_O = 300\text{mV}$ to $2.7\text{V}, R_L = 10\text{k}$ | ● | 350 | 2000 | | V/mV |
| CMRR | Common Mode Rejection Ratio | $V_S = 5\text{V}, V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | 75 | 89 | | dB |
| | | $V_S = 3\text{V}, V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | 71 | 83 | | dB |
| | CMRR Match (Channel-to-Channel) (Note 5) | $V_S = 5\text{V}, V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ $V_S = 3\text{V}, V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● ● | 70 65 | 90 85 | | dB dB |
| PSRR | Power Supply Rejection Ratio | $V_S = 3\text{V}$ to $12\text{V}, V_{\text{CM}} = V_O = 0.5\text{V}$ | ● | 82 | 101 | | dB |
| | PSRR Match (Channel-to-Channel) (Note 5) | $V_S = 3\text{V}$ to $12\text{V}, V_{\text{CM}} = V_O = 0.5\text{V}$ | ● | 78 | 102 | | dB |
| | Minimum Supply Voltage (Note 9) | $V_{\text{CM}} = V_O = 0.5\text{V}$ | ● | | 2.6 | 2.7 | V |
| V_{OL} | Output Voltage Swing Low (Note 6) | No Load | ● | | 17 | 40 | mV |
| | | $I_{\text{SINK}} = 0.5\text{mA}$ | ● | | 36 | 80 | mV |
| | | $I_{\text{SINK}} = 25\text{mA}, V_S = 5\text{V}$ | ● | | 700 | 1400 | mV |
| | | $I_{\text{SINK}} = 20\text{mA}, V_S = 3\text{V}$ | ● | | 560 | 1200 | mV |
| V_{OH} | Output Voltage Swing High (Note 6) | No Load | ● | | 16 | 40 | mV |
| | | $I_{\text{SOURCE}} = 0.5\text{mA}$ | ● | | 50 | 100 | mV |
| | | $I_{\text{SOURCE}} = 15\text{mA}, V_S = 5\text{V}$ | ● | | 820 | 1600 | mV |
| | | $I_{\text{SOURCE}} = 10\text{mA}, V_S = 3\text{V}$ | ● | | 550 | 1100 | mV |
| I_{SC} | Short-Circuit Current | $V_S = 5\text{V}$ | ● | ± 18 | ± 36 | | mA |
| | | $V_S = 3\text{V}$ | ● | ± 13 | ± 25 | | mA |
| I_{S} | Supply Current per Amplifier | | ● | | 4.0 | 5.1 | mA |
| GBW | Gain-Bandwidth Product (Note 7) | $f = 100\text{kHz}$ | ● | 14 | 28 | | MHz |
| SR | Slew Rate (Note 8) | $V_S = 5\text{V}, A_V = -1, R_L = \text{Open}, V_O = 4\text{V}$ | ● | 4.2 | 8.3 | | V/ μs |
| | | $V_S = 3\text{V}, A_V = -1, R_L = \text{Open}$ | ● | 3.9 | 7.7 | | V/ μs |

ELECTRICAL CHARACTERISTICS The ● denotes the specifications which apply over the full operating temperature range of $-40^{\circ}\text{C} < T_A < 85^{\circ}\text{C}$. $V_S = 5\text{V}, 0\text{V}$; $V_S = 3\text{V}, 0\text{V}$; $V_{CM} = V_{OUT} = \text{half supply}$, unless otherwise noted. (Note 4)

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|-----------------|---|--|--------|----------|------------|--------------------------------|
| V_{OS} | Input Offset Voltage | $V_{CM} = V^+ - 0.1\text{V}$ | ● | 250 | 775 | μV |
| | | $V_{CM} = V^- + 0.2\text{V}$ | ● | 250 | 775 | μV |
| $V_{OS\ TC}$ | Input Offset Voltage Drift (Note 3) | $V_{CM} = V^+ - 0.1\text{V}$ | ● | 2.5 | 5.5 | $\mu\text{V}/^{\circ}\text{C}$ |
| | | | ● | 1 | 3.5 | $\mu\text{V}/^{\circ}\text{C}$ |
| ΔV_{OS} | Input Offset Voltage Shift | $V_{CM} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | 200 | 750 | μV |
| | Input Offset Voltage Match (Channel-to-Channel) | $V_{CM} = V^- + 0.2\text{V}, V^+$ (Note 5) | ● | 210 | 1500 | μV |
| I_B | Input Bias Current | $V_{CM} = V^+ - 0.1\text{V}$ | ● | 0 | 650 | nA |
| | | $V_{CM} = V^- + 0.2\text{V}$ | ● | -1300 | -650 | 0 |
| ΔI_B | Input Bias Current Shift | $V_{CM} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | 1300 | 2600 | nA |
| | Input Bias Current Match (Channel-to-Channel) | $V_{CM} = V^+ - 0.1\text{V}$ (Note 5) $V_{CM} = V^- + 0.2\text{V}$ (Note 5) | ● ● | 25 25 | 390 390 | nA nA |
| I_{OS} | Input Offset Current | $V_{CM} = V^+ - 0.1\text{V}$ | ● | 25 | 195 | nA |
| | | $V_{CM} = V^- + 0.2\text{V}$ | ● | 25 | 195 | nA |
| ΔI_{OS} | Input Offset Current Shift | $V_{CM} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | 50 | 390 | nA |
| A_{VOL} | Large-Signal Voltage Gain | $V_S = 5\text{V}, V_O = 300\text{mV}$ to $4.7\text{V}, R_L = 10\text{k}$ | ● | 400 | 3500 | V/mV |
| | | $V_S = 3\text{V}, V_O = 300\text{mV}$ to $2.7\text{V}, R_L = 10\text{k}$ | ● | 300 | 1800 | V/mV |
| CMRR | Common Mode Rejection Ratio | $V_S = 5\text{V}, V_{CM} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | 75 | 87 | dB |
| | | $V_S = 3\text{V}, V_{CM} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | 71 | 83 | dB |
| | CMRR Match (Channel-to-Channel) (Note 5) | $V_S = 5\text{V}, V_{CM} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ $V_S = 3\text{V}, V_{CM} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● ● | 69 65 | 89 85 | dB dB |
| PSRR | Power Supply Rejection Ratio | $V_S = 3\text{V}$ to $12\text{V}, V_{CM} = V_O = 0.5\text{V}$ | ● | 82 | 98 | dB |
| | PSRR Match (Channel-to-Channel) (Note 5) | $V_S = 3\text{V}$ to $12\text{V}, V_{CM} = V_O = 0.5\text{V}$ | ● | 78 | 102 | dB |
| | Minimum Supply Voltage (Note 9) | $V_{CM} = V_O = 0.5\text{V}$ | ● | 2.6 | 2.7 | V |
| V_{OL} | Output Voltage Swing Low (Note 6) | No Load | ● | 18 | 40 | mV |
| | | $I_{SINK} = 0.5\text{mA}$ | ● | 38 | 80 | mV |
| | | $I_{SINK} = 25\text{mA}, V_S = 5\text{V}$ | ● | 730 | 1500 | mV |
| | | $I_{SINK} = 20\text{mA}, V_S = 3\text{V}$ | ● | 580 | 1200 | mV |
| V_{OH} | Output Voltage Swing High (Note 6) | No Load | ● | 15 | 40 | mV |
| | | $I_{SOURCE} = 0.5\text{mA}$ | ● | 55 | 110 | mV |
| | | $I_{SOURCE} = 15\text{mA}, V_S = 5\text{V}$ | ● | 860 | 1700 | mV |
| | | $I_{SOURCE} = 10\text{mA}, V_S = 3\text{V}$ | ● | 580 | 1200 | mV |
| I_{SC} | Short-Circuit Current | $V_S = 5\text{V}$ | ● | ± 17 | ± 34 | mA |
| | | $V_S = 3\text{V}$ | ● | ± 12 | ± 24 | mA |
| I_S | Supply Current per Amplifier | | ● | 4.1 | 5.2 | mA |
| GBW | Gain-Bandwidth Product (Note 7) | $f = 100\text{kHz}$ | ● | 14 | 28 | MHz |
| SR | Slew Rate (Note 8) | $V_S = 5\text{V}, A_V = -1, R_L = \text{Open}, V_O = 4\text{V}$ | ● | 3.5 | 7 | V/ μs |
| | | $V_S = 3\text{V}, A_V = -1, R_L = \text{Open}$ | ● | 3.3 | 6.5 | V/ μs |

LT1630/LT1631

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range of $-40^{\circ}\text{C} < T_A < 125^{\circ}\text{C}$. $V_S = 5\text{V}, 0\text{V}$; $V_S = 3\text{V}, 0\text{V}$; $V_{\text{CM}} = V_{\text{OUT}} = \text{half supply}$, unless otherwise noted. (Note 4)

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|------------------------|---|--|--------|----------|------------|--------------------------------|
| V_{OS} | Input Offset Voltage | $V_{\text{CM}} = V^+ - 0.1\text{V}$ | ● | 345 | 950 | μV |
| | | $V_{\text{CM}} = V^- + 0.2\text{V}$ | ● | 345 | 950 | μV |
| $V_{\text{OS TC}}$ | Input Offset Voltage Drift (Note 3) | $V_{\text{CM}} = V^+ - 0.1\text{V}$ | ● | 2.5 | 5.5 | $\mu\text{V}/^{\circ}\text{C}$ |
| | | | ● | 1 | 3.5 | $\mu\text{V}/^{\circ}\text{C}$ |
| ΔV_{OS} | Input Offset Voltage Shift | $V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | 200 | 750 | μV |
| | Input Offset Voltage Match (Channel-to-Channel) | $V_{\text{CM}} = V^- + 0.2\text{V}, V^+$ (Note 5) | ● | 210 | 1500 | μV |
| I_{B} | Input Bias Current | $V_{\text{CM}} = V^+ - 0.1\text{V}$ | ● | 0 | 650 | nA |
| | | $V_{\text{CM}} = V^- + 0.2\text{V}$ | ● | -1300 | -650 | 0 |
| ΔI_{B} | Input Bias Current Shift | $V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | 1300 | 2600 | nA |
| | Input Bias Current Match (Channel-to-Channel) | $V_{\text{CM}} = V^+ - 0.1\text{V}$ (Note 5) $V_{\text{CM}} = V^- + 0.2\text{V}$ (Note 5) | ● ● | 25 25 | 390 390 | nA nA |
| I_{OS} | Input Offset Current | $V_{\text{CM}} = V^+ - 0.1\text{V}$ | ● | 25 | 195 | nA |
| | | $V_{\text{CM}} = V^- + 0.2\text{V}$ | ● | 25 | 195 | nA |
| ΔI_{OS} | Input Offset Current Shift | $V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | 50 | 390 | nA |
| A_{VOL} | Large-Signal Voltage Gain | $V_S = 5\text{V}, V_O = 300\text{mV}$ to $4.7\text{V}, R_L = 10\text{k}$ | ● | 200 | 3100 | V/mV |
| | | $V_S = 3\text{V}, V_O = 300\text{mV}$ to $2.7\text{V}, R_L = 10\text{k}$ | ● | 150 | 1625 | V/mV |
| CMRR | Common Mode Rejection Ratio | $V_S = 5\text{V}, V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | 72 | 87 | dB |
| | | $V_S = 3\text{V}, V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | 69 | 83 | dB |
| | CMRR Match (Channel-to-Channel) (Note 5) | $V_S = 5\text{V}, V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ $V_S = 3\text{V}, V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● ● | 67 63 | 89 85 | dB dB |
| PSRR | Power Supply Rejection Ratio | $V_S = 3\text{V}$ to $12\text{V}, V_{\text{CM}} = V_O = 0.5\text{V}$ | ● | 82 | 98 | dB |
| | PSRR Match (Channel-to-Channel) (Note 5) | $V_S = 3\text{V}$ to $12\text{V}, V_{\text{CM}} = V_O = 0.5\text{V}$ | ● | 78 | 102 | dB |
| | Minimum Supply Voltage (Note 9) | $V_{\text{CM}} = V_O = 0.5\text{V}$ | ● | 2.6 | 2.7 | V |
| V_{OL} | Output Voltage Swing Low (Note 6) | No Load | ● | 18 | 40 | mV |
| | | $I_{\text{SINK}} = 0.5\text{mA}$ | ● | 38 | 100 | mV |
| | | $I_{\text{SINK}} = 25\text{mA}, V_S = 5\text{V}$ | ● | 730 | 1600 | mV |
| | | $I_{\text{SINK}} = 20\text{mA}, V_S = 3\text{V}$ | ● | 580 | 1300 | mV |
| V_{OH} | Output Voltage Swing High (Note 6) | No Load | ● | 15 | 40 | mV |
| | | $I_{\text{SOURCE}} = 0.5\text{mA}$ | ● | 55 | 120 | mV |
| | | $I_{\text{SOURCE}} = 15\text{mA}, V_S = 5\text{V}$ | ● | 860 | 1800 | mV |
| | | $I_{\text{SOURCE}} = 10\text{mA}, V_S = 3\text{V}$ | ● | 580 | 1300 | mV |
| I_{SC} | Short-Circuit Current | $V_S = 5\text{V}$ | ● | ± 17 | ± 34 | mA |
| | | $V_S = 3\text{V}$ | ● | ± 12 | ± 24 | mA |
| I_{S} | Supply Current per Amplifier | | ● | 4.1 | 5.6 | mA |
| GBW | Gain-Bandwidth Product (Note 7) | $f = 100\text{kHz}$ | ● | 13 | 28 | MHz |
| SR | Slew Rate (Note 8) | $V_S = 5\text{V}, A_V = -1, R_L = \text{Open}, V_O = 4\text{V}$ | ● | 3.5 | 7 | V/ μs |
| | | $V_S = 3\text{V}, A_V = -1, R_L = \text{Open}$ | ● | 3.3 | 6.5 | V/ μs |

ELECTRICAL CHARACTERISTICS

$T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{V}$, $V_{CM} = 0\text{V}$, $V_{OUT} = 0\text{V}$, unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|-----------------|---|---|-------------|--------------|------------|------------------------|
| V_{OS} | Input Offset Voltage | $V_{CM} = V^+$ | | 220 | 1000 | μV |
| | | $V_{CM} = V^-$ | | 220 | 1000 | μV |
| ΔV_{OS} | Input Offset Voltage Shift | $V_{CM} = V^-$ to V^+ | | 150 | 1000 | μV |
| | Input Offset Voltage Match (Channel-to-Channel) | $V_{CM} = V^-, V^+$ (Note 5) | | 200 | 1500 | μV |
| I_B | Input Bias Current | $V_{CM} = V^+$ | 0 | 550 | 1100 | nA |
| | | $V_{CM} = V^-$ | -1100 | -550 | 0 | nA |
| ΔI_B | Input Bias Current Shift | $V_{CM} = V^-$ to V^+ | | 1100 | 2200 | nA |
| | Input Bias Current Match (Channel-to-Channel) | $V_{CM} = V^+$ (Note 5) $V_{CM} = V^-$ (Note 5) | | 20 20 | 300 300 | nA nA |
| I_{OS} | Input Offset Current | $V_{CM} = V^+$ | | 20 | 150 | nA |
| | | $V_{CM} = V^-$ | | 20 | 150 | nA |
| ΔI_{OS} | Input Offset Current Shift | $V_{CM} = V^-$ to V^+ | | 40 | 300 | nA |
| | Input Noise Voltage | 0.1Hz to 10Hz | | 300 | | nV _{P-P} |
| e_n | Input Noise Voltage Density | $f = 1\text{kHz}$ | | 6 | | nV/ $\sqrt{\text{Hz}}$ |
| i_n | Input Noise Current Density | $f = 1\text{kHz}$ | | 0.9 | | pA/ $\sqrt{\text{Hz}}$ |
| C_{IN} | Input Capacitance | $f = 100\text{kHz}$ | | 3 | | pF |
| A_{VOL} | Large-Signal Voltage Gain | $V_O = -14.5\text{V}$ to 14.5V , $R_L = 10\text{k}$ $V_O = -10\text{V}$ to 10V , $R_L = 2\text{k}$ | 1000 650 | 5000 3500 | | V/mV V/mV |
| | Channel Separation | $V_O = -10\text{V}$ to 10V , $R_L = 2\text{k}$ | 112 | 134 | | dB |
| CMRR | Common Mode Rejection Ratio | $V_{CM} = V^-$ to V^+ | 89 | 106 | | dB |
| | CMRR Match (Channel-to-Channel) (Note 5) | $V_{CM} = V^-$ to V^+ | 86 | 110 | | dB |
| PSRR | Power Supply Rejection Ratio | $V_S = \pm 5\text{V}$ to $\pm 15\text{V}$ | 87 | 105 | | dB |
| | PSRR Match (Channel-to-Channel) (Note 5) | $V_S = \pm 5\text{V}$ to $\pm 15\text{V}$ | 82 | 107 | | dB |
| V_{OL} | Output Voltage Swing Low (Note 6) | No Load | | 16 | 35 | mV |
| | | $I_{SINK} = 5\text{mA}$ | | 150 | 300 | mV |
| | | $I_{SINK} = 25\text{mA}$ | | 600 | 1200 | mV |
| V_{OH} | Output Voltage Swing High (Note 6) | No Load | | 15 | 40 | mV |
| | | $I_{SINK} = 5\text{mA}$ | | 250 | 500 | mV |
| | | $I_{SINK} = 25\text{mA}$ | | 1200 | 2400 | mV |
| I_{SC} | Short-Circuit Current | | ± 35 | ± 70 | | mA |
| I_S | Supply Current per Amplifier | | | 4.1 | 5.0 | mA |
| GBW | Gain-Bandwidth Product (Note 7) | $f = 100\text{kHz}$ | 15 | 30 | | MHz |
| SR | Slew Rate | $A_V = -1$, $R_L = \text{Open}$, $V_O = \pm 10\text{V}$, Measure at $V_O = \pm 5\text{V}$ | 5 | 10 | | V/ μs |
| t_S | Settling Time | 0.01%, $V_{STEP} = 10\text{V}$, $A_V = 1$, $R_L = 1\text{k}$ | | 1.2 | | μs |

LT1630/LT1631

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range of $0^{\circ}\text{C} < T_A < 70^{\circ}\text{C}$. $V_S = \pm 15\text{V}$, $V_{CM} = 0\text{V}$, $V_{OUT} = 0\text{V}$, unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | | MIN | TYP | MAX | UNITS |
|-----------------|---|---|--------|------------|--------------|------------|--------------------------------|
| V_{OS} | Input Offset Voltage | $V_{CM} = V^+ - 0.1\text{V}$ | ● | | 300 | 1250 | μV |
| | | $V_{CM} = V^- + 0.2\text{V}$ | ● | | 300 | 1250 | μV |
| $V_{OS\ TC}$ | Input Offset Voltage Drift (Note 3) | | ● | | 4.5 | 7 | $\mu\text{V}/^{\circ}\text{C}$ |
| | | $V_{CM} = V^+ - 0.1\text{V}$ | ● | | 1.5 | 4 | $\mu\text{V}/^{\circ}\text{C}$ |
| ΔV_{OS} | Input Offset Voltage Shift | $V_{CM} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | | 180 | 1100 | μV |
| | Input Offset Voltage Match (Channel-to-Channel) | $V_{CM} = V^- + 0.2\text{V}$, $V^+ - 0.1\text{V}$ (Note 5) | ● | | 300 | 2000 | μV |
| I_B | Input Bias Current | $V_{CM} = V^+ - 0.1\text{V}$ | ● | 0 | 600 | 1200 | nA |
| | | $V_{CM} = V^- + 0.2\text{V}$ | ● | -1200 | -600 | 0 | nA |
| ΔI_B | Input Bias Current Shift | $V_{CM} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | | 1200 | 2400 | nA |
| | Input Bias Current Match (Channel-to-Channel) | $V_{CM} = V^+ - 0.1\text{V}$ (Note 5) $V_{CM} = V^- + 0.2\text{V}$ (Note 5) | ● ● | | 30 30 | 350 350 | nA nA |
| I_{OS} | Input Offset Current | $V_{CM} = V^+ - 0.1\text{V}$ | ● | | 25 | 175 | nA |
| | | $V_{CM} = V^- + 0.2\text{V}$ | ● | | 25 | 175 | nA |
| ΔI_{OS} | Input Offset Current Shift | $V_{CM} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | | 50 | 350 | nA |
| A_{VOL} | Large-Signal Voltage Gain | $V_O = -14.5\text{V}$ to 14.5V , $R_L = 10\text{k}$ $V_O = -10\text{V}$ to 10V , $R_L = 2\text{k}$ | ● ● | 900 600 | 6000 4000 | | V/mV V/mV |
| | Channel Separation | $V_O = -10\text{V}$ to 10V , $R_L = 2\text{k}$ | ● | 112 | 132 | | dB |
| CMRR | Common Mode Rejection Ratio | $V_{CM} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | 88 | 104 | | dB |
| | CMRR Match (Channel-to-Channel) (Note 5) | $V_{CM} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | 84 | 104 | | dB |
| PSRR | Power Supply Rejection Ratio | $V_S = \pm 5\text{V}$ to $\pm 15\text{V}$ | ● | 86 | 100 | | dB |
| | PSRR Match (Channel-to-Channel) (Note 5) | $V_S = \pm 5\text{V}$ to $\pm 15\text{V}$ | ● | 80 | 104 | | dB |
| V_{OL} | Output Voltage Swing Low (Note 6) | No Load | ● | | 19 | 45 | mV |
| | | $I_{SINK} = 5\text{mA}$ | ● | | 175 | 350 | mV |
| | | $I_{SINK} = 25\text{mA}$ | ● | | 670 | 1400 | mV |
| V_{OH} | Output Voltage Swing High (Note 6) | No Load | ● | | 15 | 40 | mV |
| | | $I_{SOURCE} = 5\text{mA}$ | ● | | 300 | 600 | mV |
| | | $I_{SOURCE} = 25\text{mA}$ | ● | | 1400 | 2800 | mV |
| I_{SC} | Short-Circuit Current | | ● | ± 28 | ± 57 | | mA |
| I_S | Supply Current per Amplifier | | ● | | 4.6 | 5.6 | mA |
| GBW | Gain-Bandwidth Product (Note 7) | $f = 100\text{kHz}$ | ● | 14 | 28 | | MHz |
| SR | Slew Rate | $A_V = -1$, $R_L = \text{Open}$, $V_O = \pm 10\text{V}$, Measured at $V_O = \pm 5\text{V}$ | ● | 4.5 | 9 | | V/ μs |

ELECTRICAL CHARACTERISTICS The ● denotes the specifications which apply over the full operating temperature range of $-40^{\circ}\text{C} < T_A < 85^{\circ}\text{C}$. $V_S = \pm 15\text{V}$, $V_{\text{CM}} = 0\text{V}$, $V_{\text{OUT}} = 0\text{V}$, unless otherwise noted. (Note 4)

| SYMBOL | PARAMETER | CONDITIONS | | MIN | TYP | MAX | UNITS |
|------------------------|---|---|--------|------------|--------------|------------|--------------------------------|
| V_{OS} | Input Offset Voltage | $V_{\text{CM}} = V^+ - 0.1\text{V}$ | ● | | 350 | 1400 | μV |
| | | $V_{\text{CM}} = V^- + 0.2\text{V}$ | ● | | 350 | 1400 | μV |
| $V_{\text{OS TC}}$ | Input Offset Voltage Drift (Note 3) | | ● | | 4.5 | 7 | $\mu\text{V}/^{\circ}\text{C}$ |
| | | $V_{\text{CM}} = V^+ - 0.1\text{V}$ | ● | | 1.5 | 4 | $\mu\text{V}/^{\circ}\text{C}$ |
| ΔV_{OS} | Input Offset Voltage Shift | $V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | | 180 | 1200 | μV |
| | Input Offset Voltage Match (Channel-to-Channel) | $V_{\text{CM}} = V^- + 0.2\text{V}$, $V^+ - 0.1\text{V}$ (Note 5) | ● | | 350 | 2200 | μV |
| I_{B} | Input Bias Current | $V_{\text{CM}} = V^+ - 0.1\text{V}$ | ● | 0 | 690 | 1400 | nA |
| | | $V_{\text{CM}} = V^- + 0.2\text{V}$ | ● | -1400 | -690 | 0 | nA |
| ΔI_{B} | Input Bias Current Shift | $V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | | 1380 | 2800 | nA |
| | Input Bias Current Match (Channel-to-Channel) | $V_{\text{CM}} = V^+ - 0.1\text{V}$ (Note 5) $V_{\text{CM}} = V^- + 0.2\text{V}$ (Note 5) | ● ● | | 30 30 | 420 420 | nA nA |
| I_{OS} | Input Offset Current | $V_{\text{CM}} = V^+ - 0.1\text{V}$ | ● | | 30 | 210 | nA |
| | | $V_{\text{CM}} = V^- + 0.2\text{V}$ | ● | | 30 | 210 | nA |
| ΔI_{OS} | Input Offset Current Shift | $V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | | 60 | 420 | nA |
| A_{VOL} | Large-Signal Voltage Gain | $V_{\text{O}} = -14.5\text{V}$ to 14.5V , $R_{\text{L}} = 10\text{k}$ $V_{\text{O}} = -10\text{V}$ to 10V , $R_{\text{L}} = 2\text{k}$ | ● ● | 700 400 | 6000 4000 | | V/mV V/mV |
| | Channel Separation | $V_{\text{O}} = -10\text{V}$ to 10V , $R_{\text{L}} = 2\text{k}$ | ● | 112 | 132 | | dB |
| CMRR | Common Mode Rejection Ratio | $V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | 87 | 104 | | dB |
| | CMRR Match (Channel-to-Channel) (Note 5) | $V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | 84 | 104 | | dB |
| PSRR | Power Supply Rejection Ratio | $V_{\text{S}} = \pm 5\text{V}$ to $\pm 15\text{V}$ | ● | 84 | 100 | | dB |
| | PSRR Match (Channel-to-Channel) (Note 5) | $V_{\text{S}} = \pm 5\text{V}$ to $\pm 15\text{V}$ | ● | 80 | 100 | | dB |
| V_{OL} | Output Voltage Swing Low (Note 6) | No Load | ● | | 22 | 50 | mV |
| | | $I_{\text{SINK}} = 5\text{mA}$ | ● | | 180 | 350 | mV |
| | | $I_{\text{SINK}} = 25\text{mA}$ | ● | | 700 | 1400 | mV |
| V_{OH} | Output Voltage Swing High (Note 6) | No Load | ● | | 15 | 40 | mV |
| | | $I_{\text{SOURCE}} = 5\text{mA}$ | ● | | 300 | 600 | mV |
| | | $I_{\text{SOURCE}} = 25\text{mA}$ | ● | | 1500 | 3000 | mV |
| I_{SC} | Short-Circuit Current | | ● | ± 27 | ± 54 | | mA |
| I_{S} | Supply Current per Amplifier | | ● | | 4.8 | 5.9 | mA |
| GBW | Gain-Bandwidth Product (Note 7) | $f = 100\text{kHz}$ | ● | 14 | 27 | | MHz |
| SR | Slew Rate | $A_{\text{V}} = -1$, $R_{\text{L}} = \text{Open}$, $V_{\text{O}} = \pm 10\text{V}$, Measured at $V_{\text{O}} = \pm 5\text{V}$ | ● | 4.2 | 8.5 | | V/ μs |

LT1630/LT1631

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range of $-40^{\circ}\text{C} < T_A < 125^{\circ}\text{C}$. $V_S = \pm 15\text{V}$, $V_{\text{CM}} = 0\text{V}$, $V_{\text{OUT}} = 0\text{V}$, unless otherwise noted. (Note 4)

| SYMBOL | PARAMETER | CONDITIONS | | MIN | TYP | MAX | UNITS |
|------------------------|---|---|--------|------------|--------------|------|--------------------------------|
| V_{OS} | Input Offset Voltage | $V_{\text{CM}} = V^+ - 0.1\text{V}$ | ● | | 525 | 1600 | μV |
| | | $V_{\text{CM}} = V^- + 0.2\text{V}$ | ● | | 525 | 1600 | μV |
| $V_{\text{OS TC}}$ | Input Offset Voltage Drift (Note 3) | | ● | | 4.5 | 7 | $\mu\text{V}/^{\circ}\text{C}$ |
| | | $V_{\text{CM}} = V^- - 0.1\text{V}$ | ● | | 1.5 | 4 | $\mu\text{V}/^{\circ}\text{C}$ |
| ΔV_{OS} | Input Offset Voltage Shift | $V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | | 220 | 1300 | μV |
| | Input Offset Voltage Match (Channel-to-Channel) | $V_{\text{CM}} = V^- + 0.2\text{V}$, $V^+ - 0.1\text{V}$ (Note 5) | ● | | 350 | 2200 | μV |
| I_{B} | Input Bias Current | $V_{\text{CM}} = V^+ - 0.1\text{V}$ | ● | 0 | 750 | 1500 | nA |
| | | $V_{\text{CM}} = V^- + 0.2\text{V}$ | ● | -1500 | -750 | 0 | nA |
| ΔI_{B} | Input Bias Current Shift | $V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | | 1380 | 2800 | nA |
| | Input Bias Current Match (Channel-to-Channel) | $V_{\text{CM}} = V^+ - 0.1\text{V}$ (Note 5) $V_{\text{CM}} = V^- + 0.2\text{V}$ (Note 5) | ● ● | | 42 | 460 | nA nA |
| I_{OS} | Input Offset Current | $V_{\text{CM}} = V^+ - 0.1\text{V}$ | ● | | 30 | 210 | nA |
| | | $V_{\text{CM}} = V^- + 0.2\text{V}$ | ● | | 30 | 210 | nA |
| ΔI_{OS} | Input Offset Current Shift | $V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | | 60 | 420 | nA |
| A_{VOL} | Large-Signal Voltage Gain | $V_{\text{O}} = -14.5\text{V}$ to 14.5V , $R_{\text{L}} = 10\text{k}$ $V_{\text{O}} = -10\text{V}$ to 10V , $R_{\text{L}} = 2\text{k}$ | ● ● | 700 400 | 6000 4000 | | V/mV V/mV |
| | Channel Separation | $V_{\text{O}} = -10\text{V}$ to 10V , $R_{\text{L}} = 2\text{k}$ | ● | 112 | 132 | | dB |
| CMRR | Common Mode Rejection Ratio | $V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | 87 | 104 | | dB |
| | CMRR Match (Channel-to-Channel) (Note 5) | $V_{\text{CM}} = V^- + 0.2\text{V}$ to $V^+ - 0.1\text{V}$ | ● | 84 | 104 | | dB |
| PSRR | Power Supply Rejection Ratio | $V_{\text{S}} = \pm 5\text{V}$ to $\pm 15\text{V}$ | ● | 84 | 100 | | dB |
| | PSRR Match (Channel-to-Channel) (Note 5) | $V_{\text{S}} = \pm 5\text{V}$ to $\pm 15\text{V}$ | ● | 80 | 100 | | dB |
| V_{OL} | Output Voltage Swing Low (Note 6) | No Load | ● | | 22 | 60 | mV |
| | | $I_{\text{SINK}} = 5\text{mA}$ | ● | | 180 | 400 | mV |
| | | $I_{\text{SINK}} = 25\text{mA}$ | ● | | 700 | 1500 | mV |
| V_{OH} | Output Voltage Swing High (Note 6) | No Load | ● | | 15 | 50 | mV |
| | | $I_{\text{SOURCE}} = 5\text{mA}$ | ● | | 300 | 675 | mV |
| | | $I_{\text{SOURCE}} = 25\text{mA}$ | ● | | 1500 | 3300 | mV |
| I_{SC} | Short-Circuit Current | | ● | ± 27 | ± 54 | | mA |
| I_{S} | Supply Current per Amplifier | | ● | | 4.8 | 6.4 | mA |
| GBW | Gain-Bandwidth Product (Note 7) | $f = 100\text{kHz}$ | ● | 13 | 27 | | MHz |
| SR | Slew Rate | $A_{\text{V}} = -1$, $R_{\text{L}} = \text{Open}$, $V_{\text{O}} = \pm 10\text{V}$, Measured at $V_{\text{O}} = \pm 5\text{V}$ | ● | 4.2 | 8.5 | | V/ μs |

Note 1: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

Note 2: A heat sink may be required to keep the junction temperature below the absolute maximum rating when the output is shorted indefinitely.

Note 3: This parameter is not 100% tested.

Note 4: The LT1630C/LT1631C are guaranteed to meet specified performance from 0°C to 70°C . The LT1630C/LT1631C and are designed, characterized and expected to meet specified performance from -40°C to 85°C but are not tested or QA sampled at these temperatures. The LT1630I/LT1631I are guaranteed to meet specified performance from -40°C to 85°C . The LT1630H is guaranteed to meet specified performance from -40°C to 125°C .

Note 5: Matching parameters are the difference between amplifiers A and D and between B and C on the LT1631; between the two amplifiers on the LT1630.

Note 6: Output voltage swings are measured between the output and power supply rails.


Note 7: $V_{\text{S}} = 3\text{V}$, $V_{\text{S}} = \pm 15\text{V}$ GBW limit guaranteed by correlation to 5V tests.

Note 8: $V_{\text{S}} = 3\text{V}$, $V_{\text{S}} = 5\text{V}$ slew rate limit guaranteed by correlation to $\pm 15\text{V}$ tests.

Note 9: Minimum supply voltage is guaranteed by testing the change of V_{OS} to be less than $250\mu\text{V}$ when the supply voltage is varied from 3V to 2.7V.


TYPICAL PERFORMANCE CHARACTERISTICS

V_{OS} Distribution, $V_{CM} = 0V$ (PNP Stage)

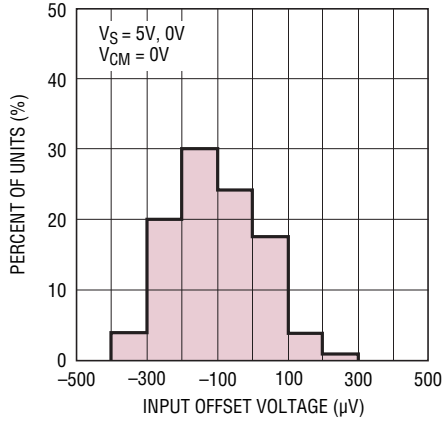


1630/31 G32

V_{OS} Distribution, $V_{CM} = 5V$ (NPN Stage)

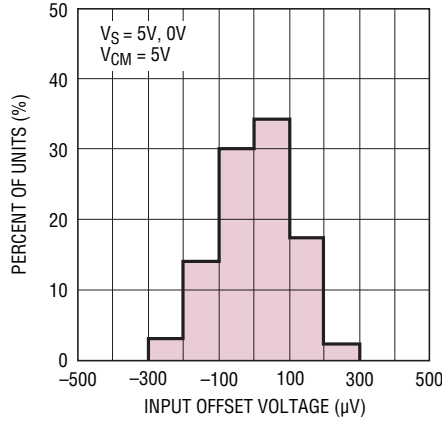


1630/31 G33

ΔV_{OS} Shift for $V_{CM} = 0V$ to $5V$

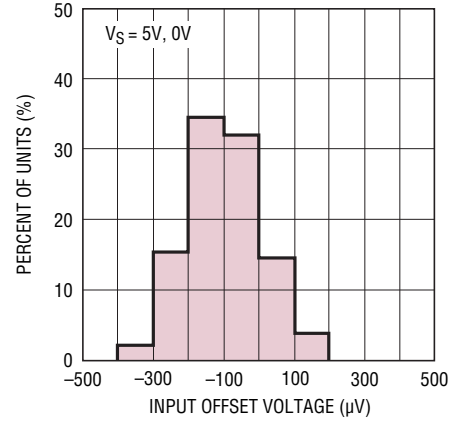


1630/31 G34

Supply Current vs Supply Voltage

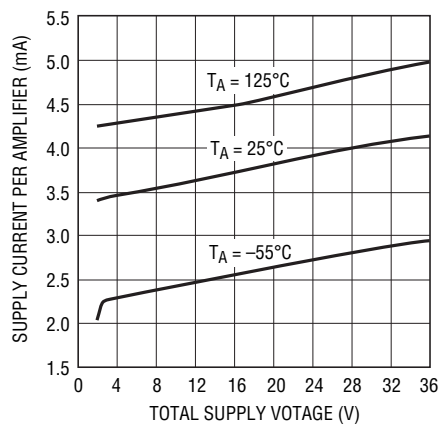


1630/31 G01

Supply Current vs Temperature

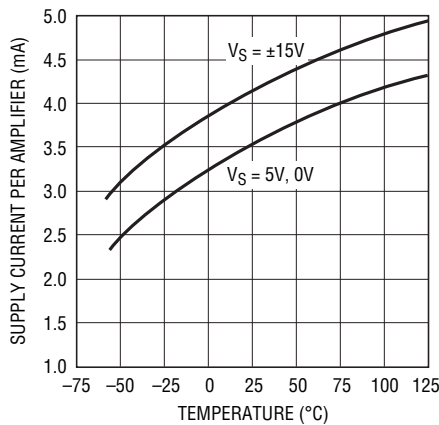


1630/31 G02

Input Bias Current vs Common Mode Voltage

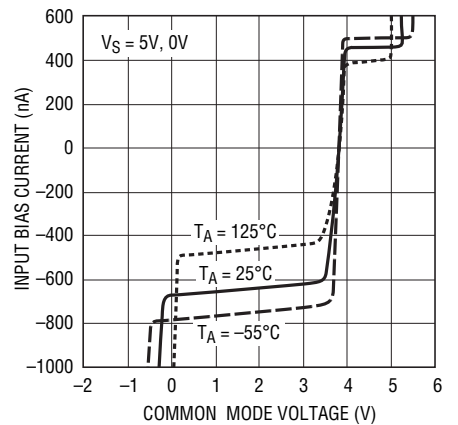


1630/31 G03

Input Bias Current vs Temperature

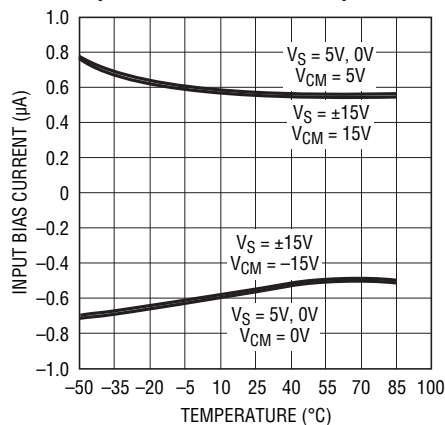


1630/31 G04

Output Saturation Voltage vs Load Current (Output Low)

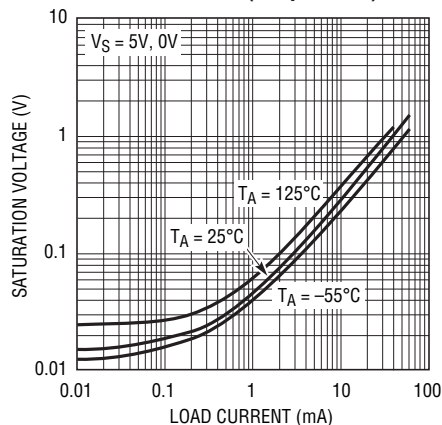

1630/31 G05


Output Saturation Voltage vs Load Current (Output High)

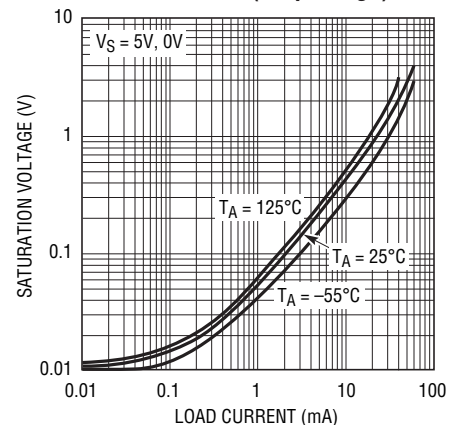

1630/31 G06


TYPICAL PERFORMANCE CHARACTERISTICS

Minimum Supply Voltage

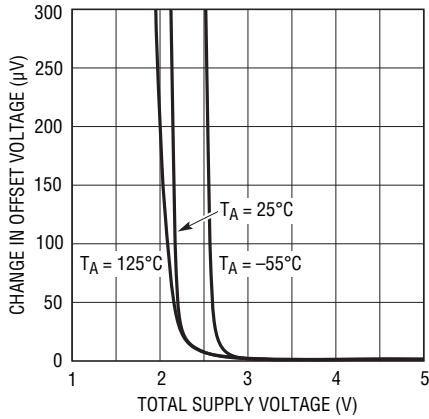


1630/31 G07

Noise Voltage Spectrum

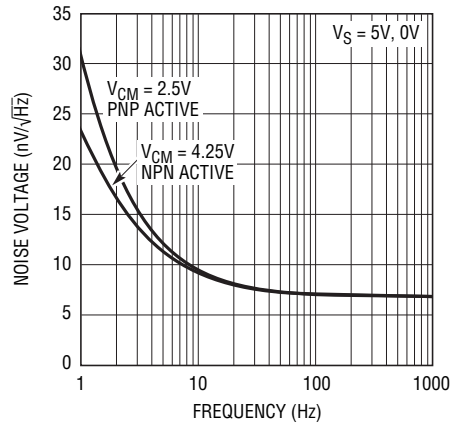


11630/31 G09

Current Noise Spectrum

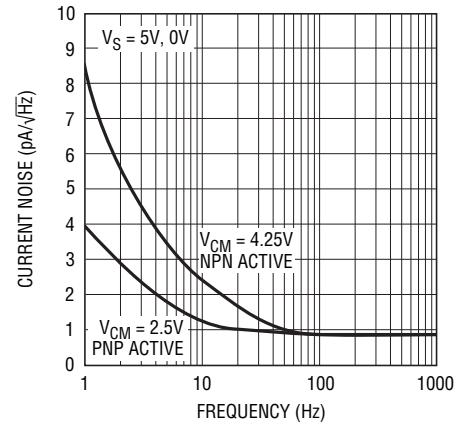


1630/31 G10

0.1Hz to 10Hz Output Voltage Noise

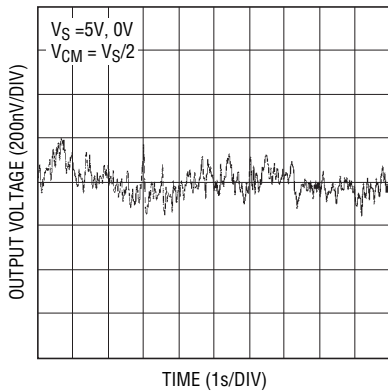


1630/31 G25

Gain and Phase vs Frequency

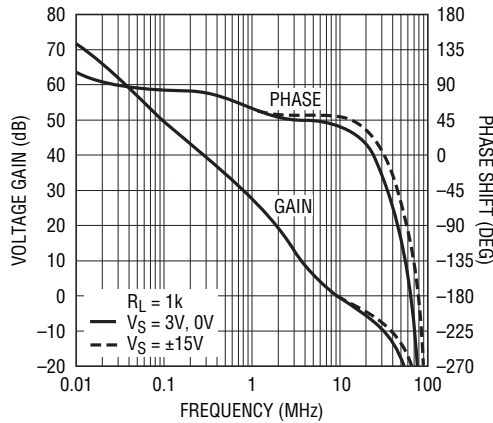


1630/31 G11

Gain Bandwidth and Phase Margin vs Supply Voltage

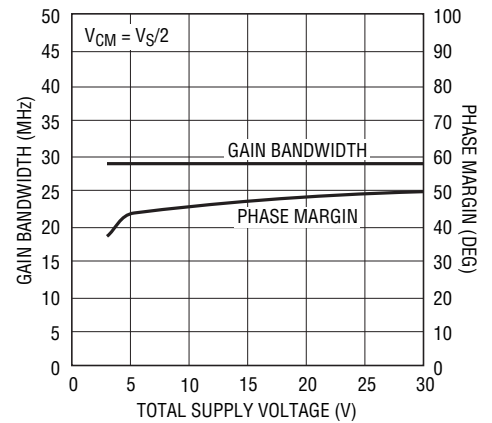


1630/31 G14

CMRR vs Frequency

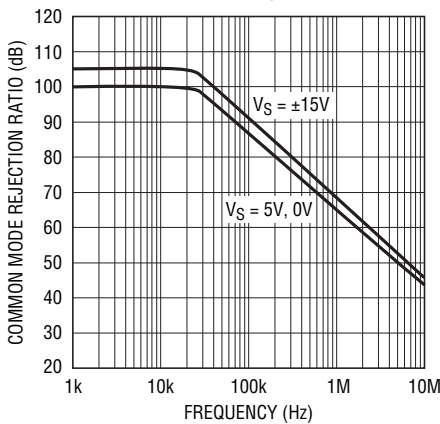


1630/31 G12

PSRR vs Frequency

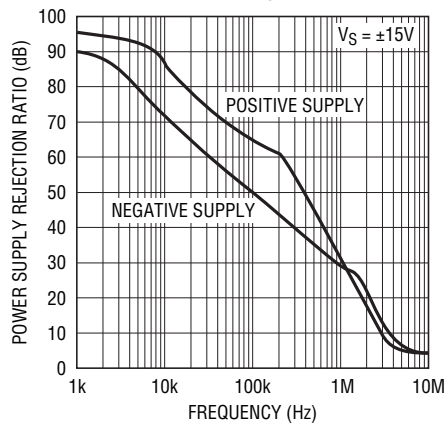

1630/31 G13


Channel Separation vs Frequency

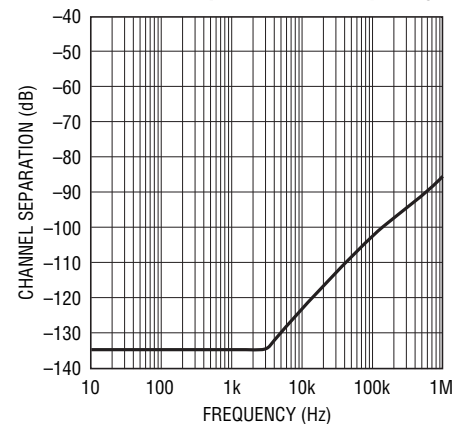

1630/31 G15


TYPICAL PERFORMANCE CHARACTERISTICS

Capacitive Load Handling

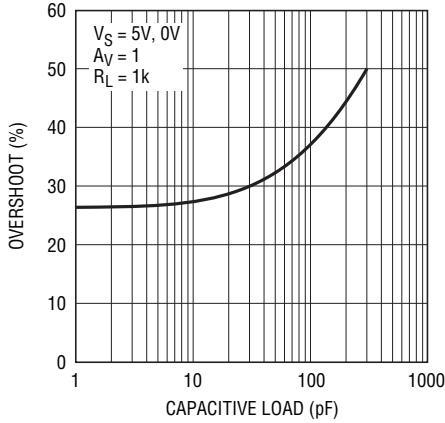


1630/31 G16

Slew Rate vs Supply Voltage

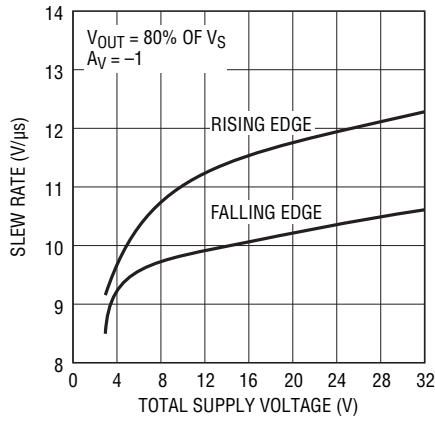


1630/31 G17

Output Step vs Settling Time to 0.01%

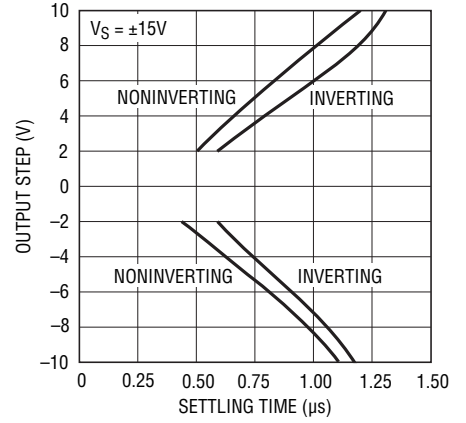


1630/31 G18

Open-Loop Gain

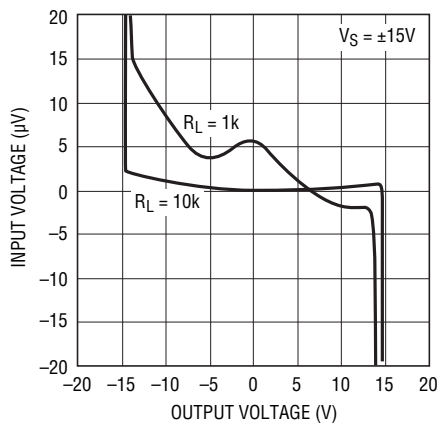


1630/31 G19

Open-Loop Gain

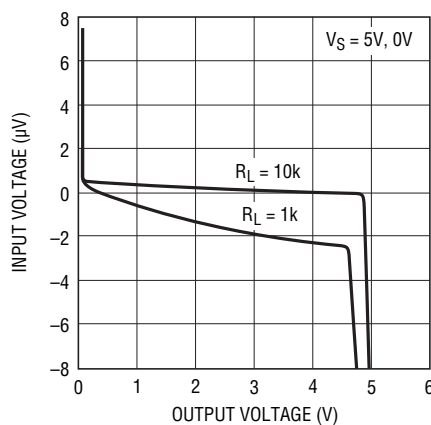


1630/31 G20

Open-Loop Gain

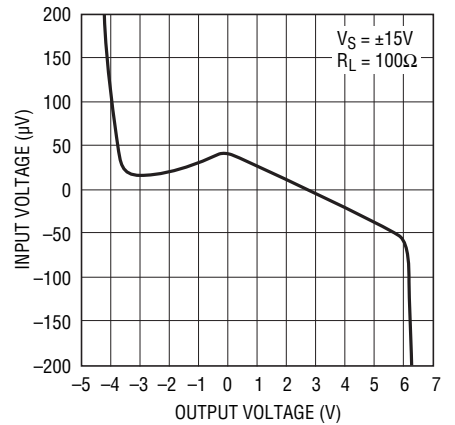


1630/31 G21

Warm-Up Drift vs Time

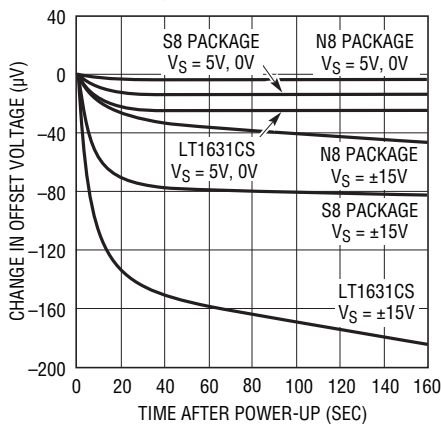


1630/31 G22

Maximum Undistorted Output Signal vs Frequency

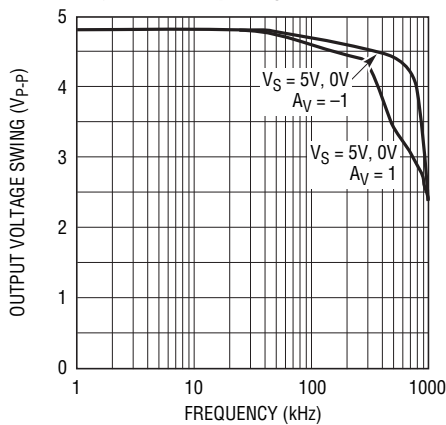

1630/31 G24


Total Harmonic Distortion + Noise vs Frequency

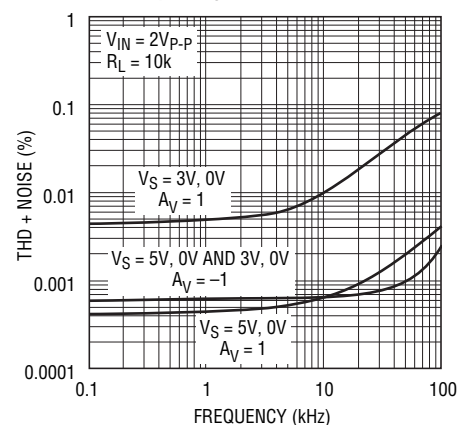


1630/31 G23

TYPICAL PERFORMANCE CHARACTERISTICS


Harmonic Distortion vs Frequency

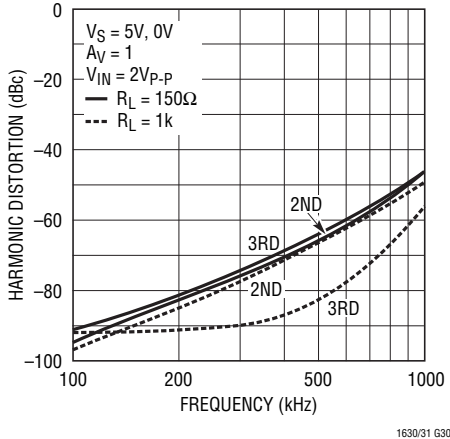


5V Small-Signal Response

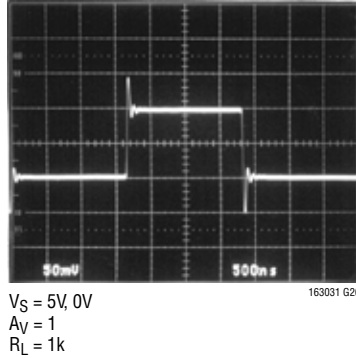


5V Large-Signal Response

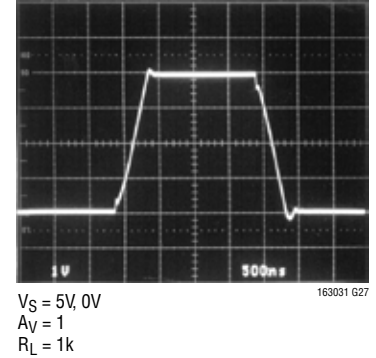


Harmonic Distortion vs Frequency

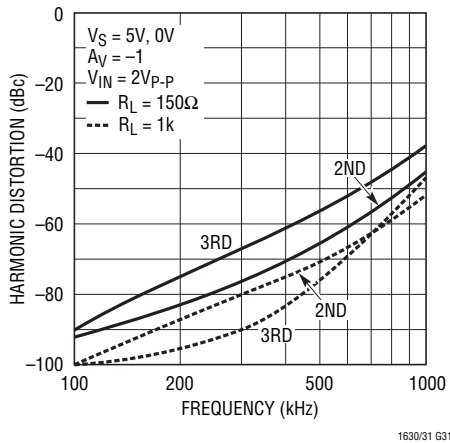

±15V Small-Signal Response

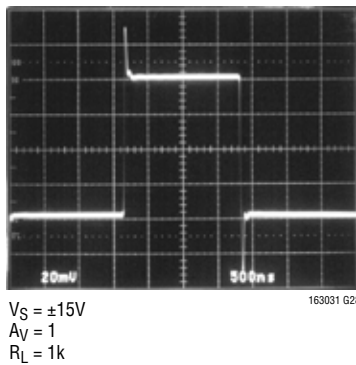

±15V Large-Signal Response

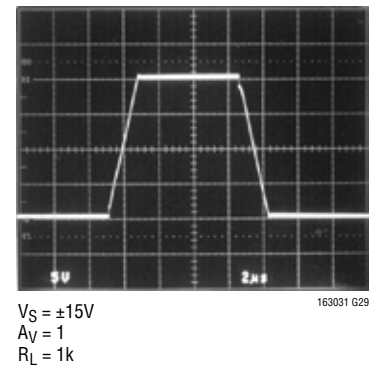

APPLICATIONS INFORMATION

Rail-to-Rail Input and Output

The LT1630/LT1631 are fully functional for an input and output signal range from the negative supply to the positive supply. Figure 1 shows a simplified schematic of the amplifier. The input stage consists of two differential amplifiers, a PNP stage Q1/Q2 and an NPN stage Q3/Q4 that are active over different ranges of input common mode voltage. The PNP differential input pair is active for input common mode voltages V_{CM} between the negative supply to approximately 1.4V below the positive supply. As V_{CM} moves closer toward the positive supply, the transis-

tor Q5 will steer the tail current I_1 to the current mirror Q6/Q7, activating the NPN differential pair and the PNP pair becomes inactive for the rest of the input common mode range up to the positive supply.

The output is configured with a pair of complementary common emitter stages Q14/Q15 that enables the output to swing from rail to rail. These devices are fabricated on Linear Technology's proprietary complementary bipolar process to ensure similar DC and AC characteristics. Capacitors C1 and C2 form local feedback loops that lower the output impedance at high frequencies.

APPLICATIONS INFORMATION

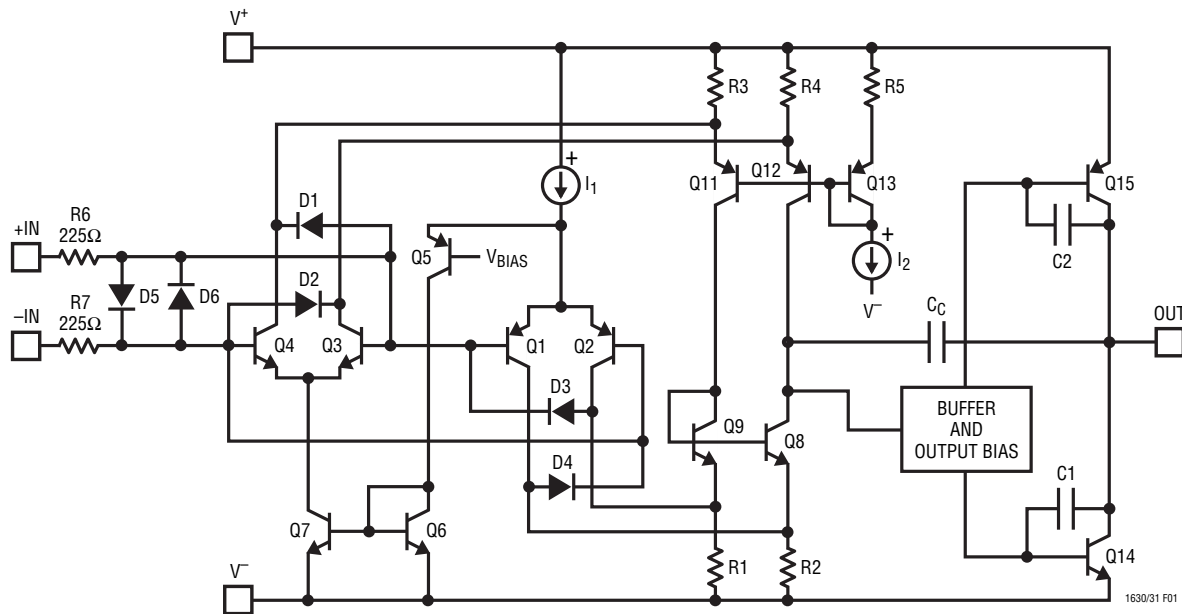


Figure 1. LT1630 Simplified Schematic Diagram

Power Dissipation

The LT1630/LT1631 amplifiers combine high speed and large output current drive in a small package. Because the amplifiers operate over a very wide supply range, it is possible to exceed the maximum junction temperature of 150°C in plastic packages under certain conditions. Junction temperature, T_J , is calculated from the ambient temperature, T_A , and power dissipation, P_D , as follows:

$$\text{LT1630CN8: } T_J = T_A + (P_D \cdot 130^\circ\text{C/W})$$

$$\text{LT1630CS8: } T_J = T_A + (P_D \cdot 190^\circ\text{C/W})$$

$$\text{LT1631CS: } T_J = T_A + (P_D \cdot 150^\circ\text{C/W})$$

The power dissipation in the IC is the function of the supply voltage, output voltage and load resistance. For a given supply voltage, the worst-case power dissipation $P_{D\text{MAX}}$ occurs at the maximum supply current and when the output voltage is at half of either supply voltage (or the maximum swing if less than 1/2 supply voltage). Therefore $P_{D\text{MAX}}$ is given by:

$$P_{D\text{MAX}} = (V_S \cdot I_{S\text{MAX}}) + (V_S/2)^2/R_L$$

To ensure that the LT1630/LT1631 are used properly, calculate the worst-case power dissipation, get the thermal resistance for a chosen package and its maximum junction temperature to derive the maximum ambient temperature.

Example: An LT1630CS8 operating on $\pm 15\text{V}$ supplies and driving a 500Ω , the worst-case power dissipation per amplifier is given by:

$$P_{D\text{MAX}} = (30\text{V} \cdot 4.75\text{mA}) + (15\text{V} - 7.5\text{V})(7.5/500) \\ = 0.143 + 0.113 = 0.256\text{W}$$

If both amplifiers are loaded simultaneously, then the total power dissipation is 0.512W. The SO-8 package has a junction-to-ambient thermal resistance of 190°C/W in still air. Therefore, the maximum ambient temperature that the part is allowed to operate is:

$$T_A = T_J - (P_{D\text{MAX}} \cdot 190^\circ\text{C/W}) \\ T_A = 150^\circ\text{C} - (0.512\text{W} \cdot 190^\circ\text{C/W}) = 53^\circ\text{C}$$

For a higher operating temperature, lower the supply voltage or use the DIP package part.

APPLICATIONS INFORMATION

Input Offset Voltage

The offset voltage changes depending upon which input stage is active, and the maximum offset voltages are trimmed to less than $525\mu\text{V}$. To maintain the precision characteristics of the amplifier, the change of V_{OS} over the entire input common mode range (CMRR) is guaranteed to be less than $525\mu\text{V}$ on a single 5V supply.

Input Bias Current

The input bias current polarity depends on the input common mode voltage. When the PNP differential pair is active, the input bias currents flow out of the input pins. They flow in the opposite direction when the NPN input stage is active. The offset voltage error due to input bias currents can be minimized by equalizing the noninverting and inverting input source impedance.

Output

The outputs of the LT1630/LT1631 can deliver large load currents; the short-circuit current limit is 70mA. Take care to keep the junction temperature of the IC below the absolute maximum rating of 150°C (refer to the Power Dissipation section). The output of these amplifiers have reverse-biased diodes to each supply. If the output is forced beyond either supply, unlimited current will flow through these diodes. If the current is transient and limited to several hundred mA, no damage to the part will occur.

Overdrive Protection

To prevent the output from reversing polarity when the input voltage exceeds the power supplies, two pairs of crossing diodes D1 to D4 are employed. When the input voltage exceeds either power supply by approximately 700mV, D1/D2 or D3/D4 will turn on, forcing the output to the proper polarity. For this phase reversal protection to work properly, the input current must be limited to less than 5mA. If the amplifier is to be severely overdriven, an external resistor should be used to limit the overdrive current.

The LT1630/LT1631's input stages are protected against large differential input voltages by a pair of back-to-back diodes D5/D6. When a differential voltage of more than 0.7V is applied to the inputs, these diodes will turn on, preventing the emitter-base breakdown of the input transistors. The current in D5/D6 should be limited to less than 10mA. Internal 225Ω resistors R6 and R7 will limit the input current for differential input signals of 4.5V or less. For larger input levels, a resistor in series with either or both inputs should be used to limit the current. Worst-case differential input voltage usually occurs when the output is shorted to ground. In addition, the amplifier is protected against ESD strikes up to 3kV on all pins.

Capacitive Load

The LT1630/LT1631 are wideband amplifiers that can drive capacitive loads up to 200pF on $\pm 15\text{V}$ supplies in a unity-gain configuration. On a 3V supply, the capacitive load should be kept to less than 100pF. When there is a need to drive larger capacitive loads, a resistor of 20Ω to 50Ω should be connected between the output and the capacitive load. The feedback should still be taken from the output so that the resistor isolates the capacitive load to ensure stability.


Feedback Components

The low input bias currents of the LT1630/LT1631 make it possible to use the high value feedback resistors to set the gain. However, care must be taken to ensure that the pole formed by the feedback resistors and the total capacitance at the inverting input does not degrade stability. For instance, the LT1630/LT1631 in a noninverting gain of 2, set with two 20k resistors, will probably oscillate with 10pF total input capacitance (5pF input capacitance and 5pF board capacitance). The amplifier has a 5MHz crossing frequency and a 52° phase margin at 6dB of gain. The feedback resistors and the total input capacitance form a pole at 1.6MHz that induces a phase shift of 72° at 5MHz! The solution is simple: either lower the value of the resistors or add a feedback capacitor of 10pF or more.

TYPICAL APPLICATIONS

Single Supply, 40dB Gain, 350kHz Instrumentation Amplifier

An instrumentation amplifier with a rail-to-rail output swing, operating from a 3V supply can be constructed with the LT1630 as shown in Figure 2. The amplifier has a nominal gain of 100, which can be adjusted with resistor R5. The DC output level is set by the difference of the two inputs multiplied by the gain of 100. Common mode range can be calculated by the equations shown with Figure 2. For example, the common mode range is from 0.15V to 2.65V if the output is set at one half of the 3V supply. The common mode rejection is greater than 110dB at 100Hz when trimmed with resistor R1. The amplifier has a bandwidth of 355kHz as shown in Figure 3.

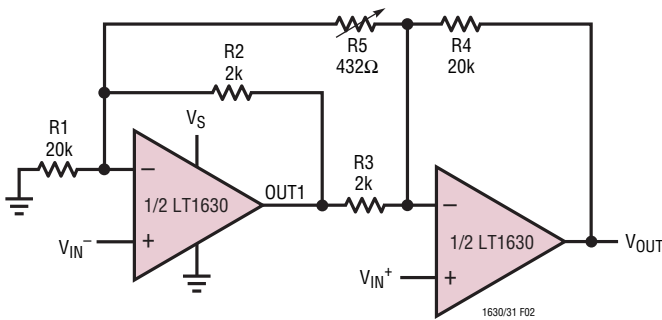

BW = 355kHz

$$A_V = \frac{R4}{R3} \left(1 + \frac{R2}{R1} + \frac{R3+R2}{R5} \right) = 100$$

$$V_{OUT} = (V_{IN}^+ - V_{IN}^-) \cdot A_V$$

LOWER LIMIT COMMON MODE INPUT VOLTAGE

$$V_{CML} = \left[\left(\frac{V_{OUT}}{A_V} \right) \frac{R2}{R5} + 0.1V \right] \frac{1.0}{1.1}$$

UPPER LIMIT COMMON MODE INPUT VOLTAGE

$$V_{CMH} = \left[\left(\frac{V_{OUT}}{A_V} \right) \frac{R2}{R5} + (V_S - 0.15V) \right] \frac{1.0}{1.1}$$

WHERE V_S IS THE SUPPLY CURRENT

Figure 2. Single Supply, 40dB Gain Instrumentation Amplifier

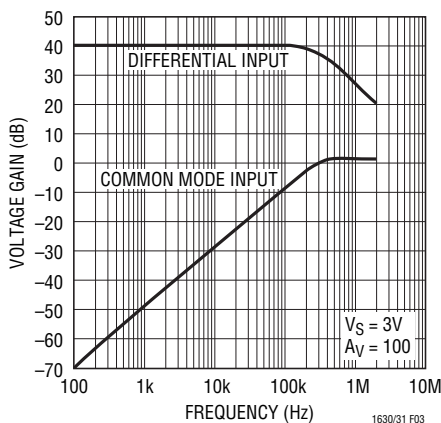


Figure 3. Frequency Response

Tunable Q Notch Filter

A single supply, tunable Q notch filter as shown in Figure 4 is built with LT1630 to maximize the output swing. The filter has a gain of 2, and the notch frequency (f_0) is set by the values of R and C. The resistors R10 and R11 set up the DC level at the output. The Q factor can be adjusted by varying the value of R8. The higher value of R8 will decrease Q as depicted in Figure 5, because the output induces less of feedback to amplifier A2. The value of R7 should be equal or greater than R9 to prevent oscillation. If R8 is a short and R9 is larger than R7, then the positive feedback from the output will create phase inversion at the output of amplifier A2, which will lead to oscillation.

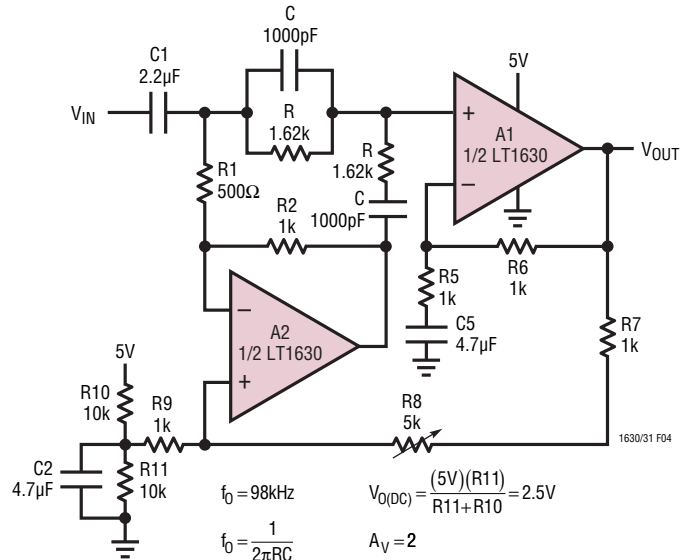


Figure 4. Tunable Q Notch Filter


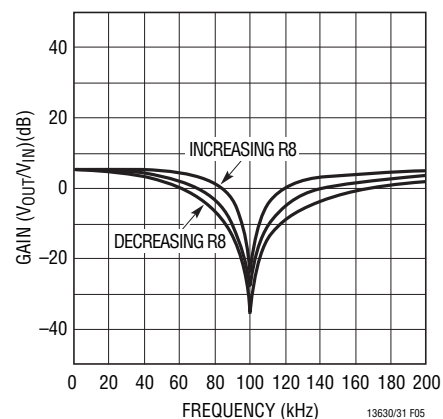


Figure 5. Frequency Response


PACKAGE DESCRIPTION

N8 Package 8-Lead PDIP (Narrow .300 Inch) (Reference LTC DWG # 05-08-1510)

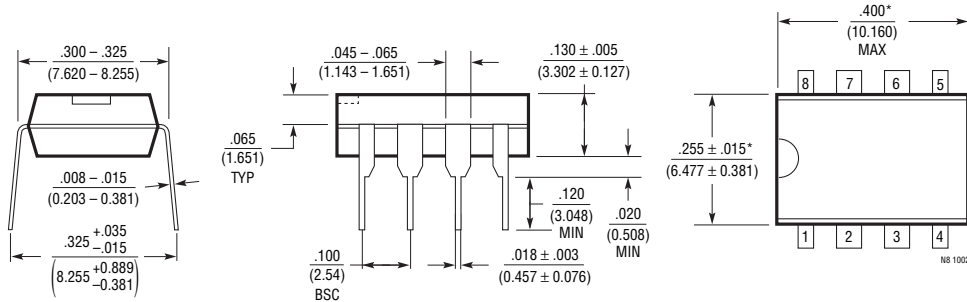

NOTE:
1. DIMENSIONS ARE IN INCHES
MILLIMETERS
*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCH (0.254mm)


S8 Package 8-Lead Plastic Small Outline (Narrow .150 Inch) (Reference LTC DWG # 05-08-1610)

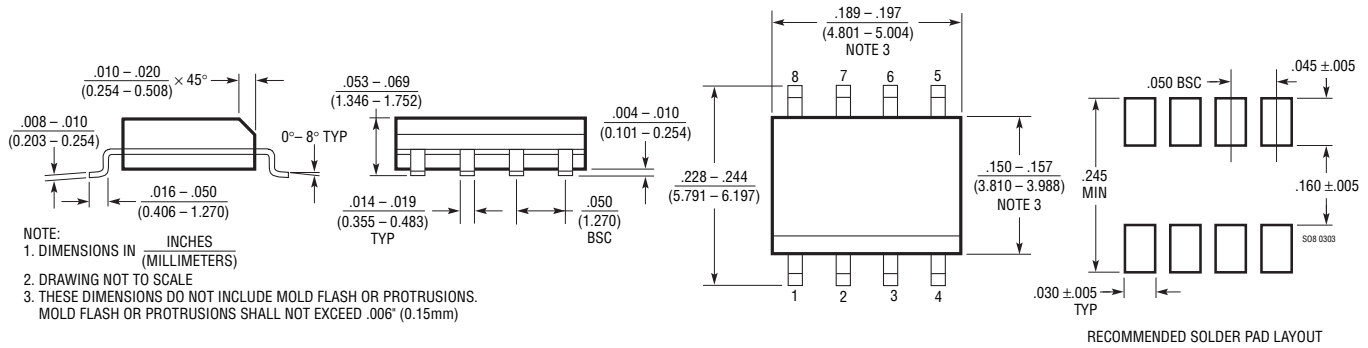

NOTE:
1. DIMENSIONS IN INCHES
MILLIMETERS
2. DRAWING NOT TO SCALE
3. THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .006" (0.15mm)

RECOMMENDED SOLDER PAD LAYOUT

S Package 14-Lead Plastic Small Outline (Narrow .150 Inch) (Reference LTC DWG # 05-08-1610)

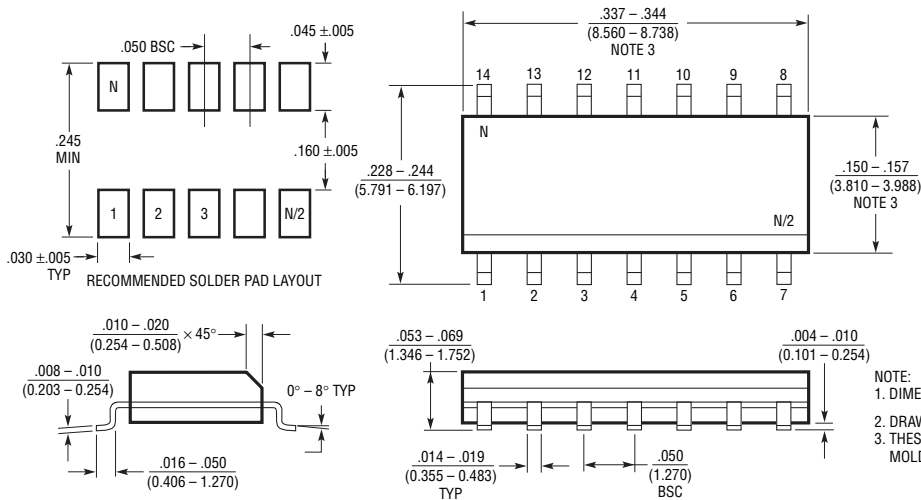

NOTE:
1. DIMENSIONS IN INCHES
MILLIMETERS
2. DRAWING NOT TO SCALE
3. THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .006" (0.15mm)

REVISION HISTORY

| REV | DATE | DESCRIPTION | PAGE NUMBER |
|-----|--------|---|-------------|
| A | 2/2010 | Changes to Absolute Maximum Ratings | 2 |
| | | Updated Order Information Section | 2 |
| | | Added H Grade Part | 2 |
| | | Added H Grade Electrical Characteristics Tables | 6, 10 |

TYPICAL APPLICATION

RF Amplifier Control Biasing and DC Restoration

Taking advantage of the rail-to-rail input and output, and the large output current capability of the LT1630, the circuit, shown in Figure 6, provides precise bias currents for the RF amplifiers and restores DC output level. To ensure optimum performance of an RF amplifier, its bias point must be accurate and stable over the operating temperature range. The op amp A1 combined with Q1, Q2, R1, R2 and R3 establishes two current sources of 21.5mA to bias RF1 and RF2 amplifiers. The current of Q1 is determined by the voltage across R2 over R1, which is replicated in Q2. These current sources are stable and precise over temperature and have a low dissipated power due to a low voltage drop between their terminals. The amplifier A2 is used to restore the DC level at the output. With a large output current of the LT1630, the output can be set at 1.5VDC on 5V supply and 50Ω load. This circuit has a 3dB bandwidth from 2MHz to 2GHz and a power gain of 25dB.

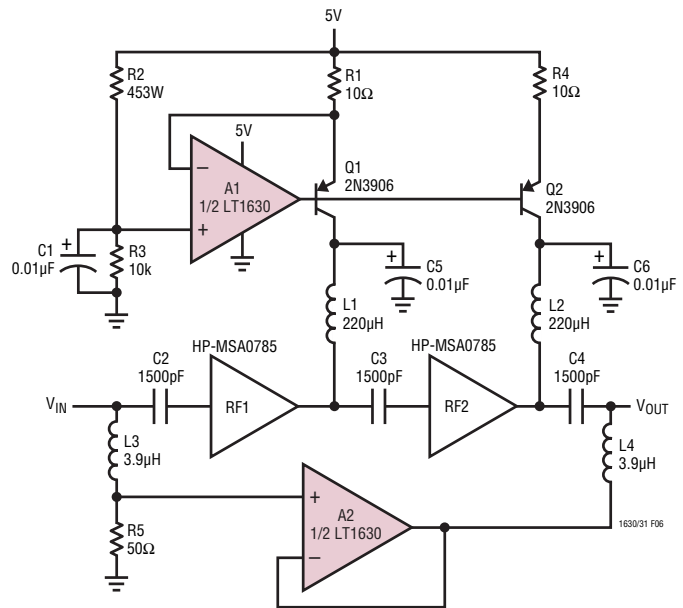


Figure 6. RF Amplifier Control Biasing and DC Restoration

RELATED PARTS

| PART NUMBER | DESCRIPTION | COMMENTS |
|---------------|--|--|
| LT1211/LT1212 | Dual/Quad 14MHz, 7V/μs, Single Supply Precision Op Amps | Input Common Mode Includes Ground, 275μV $V_{OS(MAX)}$, 6μV/°C Max Drift, Max Supply Current 1.8mA per Op Amp |
| LT1213/LT1214 | Dual/Quad 28MHz, 12V/μs, Single Supply Precision Op Amps | Input Common Mode Includes Ground, 275μV $V_{OS(MAX)}$, 6μV/°C Max Drift, Max Supply Current 3.5mA per Op Amp |
| LT1215/LT1216 | Dual/Quad 23MHz, 50V/μs, Single Supply Precision Op Amps | Input Common Mode Includes Ground, 450μV $V_{OS(MAX)}$, 6μV/°C Max Drift, Max Supply Current 6.6mA per Op Amp |
| LT1498/LT1499 | Dual/Quad 10MHz, 6V/μs Rail-to-Rail Input and Output C-Load™ Op Amps | High DC Accuracy, 475μV $V_{OS(MAX)}$, 4μV/°C Max Drift, Max Supply Current 2.2mA per Amp |
| LT1632/LT1633 | Dual/Quad 45MHz, 45V/μs Rail-to-Rail Input and Output Op Amps | High DC Accuracy, 1.35mV $V_{OS(MAX)}$, 70mA Output Current, Max Supply Current 5.2mA per Amp |

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View LT1630CN8#PBF on WIN SOURCE](#)

 [Linear Technology](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management