



**THE DATASHEET OF
LTC7545ALSW#PBF**



FEATURES

- Improved Direct Replacement for AD7545A and AD7545
- DNL and INL Over Temperature: $\pm 0.5\text{LSB}$
- Gain Error: $\pm 1\text{LSB}$ Maximum
- 4-Quadrant Multiplication
- Single 5V or 15V Supply
- Low Power Consumption
- Low Cost

APPLICATIONS


- Process Control and Industrial Automation
- Software Controlled Gain Adjustment
- Digitally Controlled Filter and Power Supplies
- Automatic Test Equipment

DESCRIPTION

The LTC[®]7545A is a 12-bit multiplying digital-to-analog converter (DAC) with a microprocessor compatible parallel input. It is a superior pin compatible replacement for the industry standard AD7545A and AD7545. Improvements include better accuracy, better stability over temperature and supply variations and lower sensitivity to output amplifier offset.


This very versatile DAC is useful for 2-quadrant and 4-quadrant multiplying, programmable gain and filtering and single supply noninverting voltage output operation.

Parts are available in 20-pin PDIP and SO packages and commercial and industrial temperature grades.


 LTC and LT are registered trademarks of Linear Technology Corporation.

TYPICAL APPLICATION

2-Quadrant Multiplying DAC Has Less Than 0.5LSB (Typ) Total Unadjusted Error

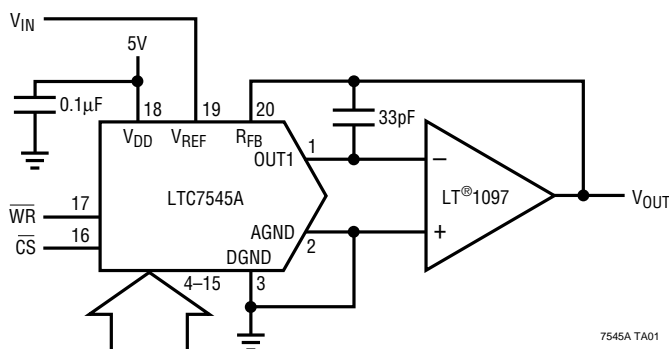

Integral Nonlinearity Over Temperature

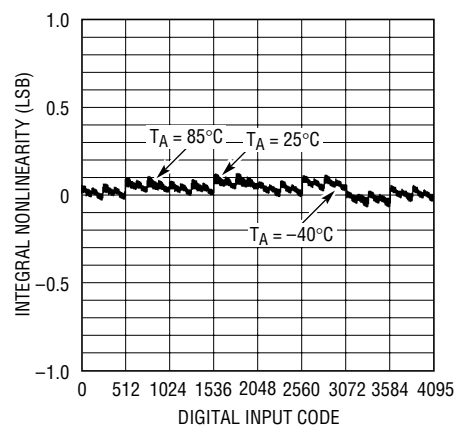

ABSOLUTE MAXIMUM RATINGS

| | |
|---|--------------------------|
| V_{DD} to AGND | -0.5V to 17V |
| V_{DD} to DGND | -0.5V to 17V |
| AGND to DGND | -0.5V to $V_{DD} + 0.5V$ |
| DGND to AGND | -0.5V to $V_{DD} + 0.5V$ |
| V_{REF} to AGND,DGND | $\pm 25V$ |
| R_{FB} to AGND,DGND | $\pm 25V$ |
| Digital Inputs to DGND | -0.5V to $V_{DD} + 0.5V$ |
| V_{OUT1} to AGND, DGND | -0.5V to $V_{DD} + 0.5V$ |
| Maximum Junction Temperature | 150°C |
| Operating Temperature Range | |
| Commercial (K, L Versions) | 0°C to 70°C |
| Industrial (B, C Versions)..... | -40°C to 85°C |
| Storage Temperature Range | -65°C to 150°C |
| Lead Temperature (Soldering, 10 sec)..... | 300°C |

PACKAGE/ORDER INFORMATION

| TOP VIEW | | ORDER PART NUMBER |
|----------------|----------------------|-------------------|
| OUT1 [1] | [20] R_{FB} | LTC7545ABG |
| AGND [2] | [19] V_{REF} | LTC7545ABN |
| DGND [3] | [18] V_{DD} | LTC7545ABSW |
| DB11 (MSB) [4] | [17] \overline{WR} | LTC7545ACG |
| DB10 [5] | [16] \overline{CS} | LTC7545ACN |
| DB9 [6] | [15] DB0 (LSB) | LTC7545ACSW |
| DB8 [7] | [14] DB1 | LTC7545AKG |
| DB7 [8] | [13] DB2 | LTC7545AKN |
| DB6 [9] | [12] DB3 | LTC7545AKSW |
| DB5 [10] | [11] DB4 | LTC7545ALG |
| | | LTC7545ALN |
| | | LTC7545ALSW |

| | |
|--|--------------|
| G PACKAGE | N PACKAGE |
| 20-LEAD PLASTIC SSOP | 20-LEAD PDIP |
| SW PACKAGE | |
| 20-LEAD PLASTIC SO WIDE | |
| $T_{JMAX} = XXX^{\circ}C, \theta_{JA} = XXX^{\circ}C/W$ (G) | |
| $T_{JMAX} = 150^{\circ}C, \theta_{JA} = 100^{\circ}C/W$ (N) | |
| $T_{JMAX} = 150^{\circ}C, \theta_{JA} = 130^{\circ}C/W$ (SW) | |

Consult factory for Military grade parts.

ELECTRICAL CHARACTERISTICS

$V_{DD} = 5V$ or $15V$, $V_{REF} = 10V$, $V_{OUT1} = AGND = 0V$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | LTC7545AK/AB | | | LTC7545AL/AC | | | UNITS | |
|------------------------|---|---|--------------|-----|------------------------|--------------|-----|-------------|-------------------|------------------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | | |
| Accuracy | | | | | | | | | | |
| | Resolution | | ● | 12 | | 12 | | | Bits | |
| INL | Integral Nonlinearity (Relative Accuracy) | (Note 1) | | | $T_A = 25^{\circ}C$ | ± 0.5 | | ± 0.5 | LSB | |
| | | | ● | | T_{MIN} to T_{MAX} | ± 0.5 | | ± 0.5 | LSB | |
| DNL | Differential Nonlinearity | Guaranteed Monotonic | | | $T_A = 25^{\circ}C$ | ± 1 | | ± 0.5 | LSB | |
| | | T_{MIN} to T_{MAX} | ● | | T_{MIN} to T_{MAX} | ± 1 | | ± 0.5 | LSB | |
| GE | Gain Error | (Note 2) | | | $T_A = 25^{\circ}C$ | ± 2 | | ± 1 | LSB | |
| | | | ● | | T_{MIN} to T_{MAX} | ± 3 | | ± 2 | LSB | |
| | Gain Temperature Coefficient | (Note 3) $\Delta Gain/\Delta Temperature$ | ● | | | 1 | 5 | 1 | 5 | ppm/ $^{\circ}C$ |
| I_{LKG} | OUT1 Leakage Current | (Note 4) | | | $T_A = 25^{\circ}C$ | ± 10 | | ± 10 | nA | |
| | | | ● | | T_{MIN} to T_{MAX} | ± 50 | | ± 50 | nA | |
| PSRR | Power Supply Rejection | | ● | | | ± 0.002 | | ± 0.002 | %/% | |
| Reference Input | | | | | | | | | | |
| R_{REF} | V_{REF} Input Resistance | (Note 5) | ● | 8 | 11 | 15 | 8 | 11 | 15 | k Ω |
| AC Performance | | | | | | | | | | |
| | Output Current Settling Time | (Notes 3, 6, 7) | ● | | | 1 | | 1 | μs | |
| | Propagation Delay | (Notes 3, 6, 8) | ● | | | 150 | | 150 | ns | |
| | Digital-to-Analog Glitch Impulse | (Notes 6, 9) | ● | | | 5 | | 5 | nV-sec | |
| | Multiplying Feedthrough Error | $V_{REF} = \pm 10V$, 10kHz Sine Wave | ● | | | 5 | | 5 | mV _{p-p} | |
| Analog Outputs | | | | | | | | | | |
| C_{OUT} | Output Capacitance (Note 3) | DB0 to DB11 = 0V, \overline{WR} , \overline{CS} = 0V | ● | | C_{OUT1} | 30 | 70 | 30 | 70 | pF |
| | | DB0 to DB11 = V_{DD} , \overline{WR} , \overline{CS} = 0V | ● | | C_{OUT1} | 60 | 150 | 60 | 150 | pF |

ELECTRICAL CHARACTERISTICS

$V_{DD} = 5V$, $V_{REF} = 10V$, $V_{OUT1} = AGND = 0V$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | ALL GRADES | | | UNITS | |
|--|---|---|------------|-------|-----|-------|----|
| | | | MIN | TYP | MAX | | |
| Digital Inputs | | | | | | | |
| V_{IH} | Digital Input High Voltage | | ● | 2.4 | | V | |
| V_{IL} | Digital Input Low Voltage | | ● | | 0.8 | V | |
| I_{IN} | Digital Input Current | | ● | 0.001 | ±1 | μA | |
| C_{IN} | Digital Input Capacitance | (Note 3) $V_{IN} = 0V$ | ● | | 8 | pF | |
| Timing Characteristics (Note 3) | | | | | | | |
| t_{CS} | \overline{CS} to \overline{WR} Setup Time | | ● | 100 | | ns | |
| t_{CH} | \overline{CS} to \overline{WR} Hold Time | | ● | 0 | | ns | |
| t_{WR} | Write Pulse Width | | ● | 100 | | ns | |
| t_{DS} | Data Setup Time | | ● | 100 | | ns | |
| t_{DH} | Data Hold Time | | ● | 5 | | ns | |
| Power Supply | | | | | | | |
| V_{DD} | Supply Voltage | | ● | 4.75 | 5 | 5.25 | V |
| I_{DD} | Supply Current | All Digital Inputs = V_{IH} or V_{IL} | ● | | 2 | | mA |
| | | All Digital Inputs = $0V$ or V_{DD} | ● | 10 | 100 | | μA |

$V_{DD} = 15V$, $V_{REF} = 10V$, $V_{OUT1} = AGND = 0V$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | ALL GRADES | | | UNITS | |
|--|---|---|------------|-------|-----|-------|----|
| | | | MIN | TYP | MAX | | |
| Digital Inputs | | | | | | | |
| V_{IH} | Digital Input High Voltage | | ● | 13.5 | | V | |
| V_{IL} | Digital Input Low Voltage | | ● | | 1.5 | V | |
| I_{IN} | Digital Input Current | | ● | | ±1 | μA | |
| C_{IN} | Digital Input Capacitance | (Note 3) $V_{IN} = 0V$ | ● | | 8 | pF | |
| Timing Characteristics (Note 3) | | | | | | | |
| t_{CS} | \overline{CS} to \overline{WR} Setup Time | | ● | 75 | | ns | |
| t_{CH} | \overline{CS} to \overline{WR} Hold Time | | ● | 0 | | ns | |
| t_{WR} | Write Pulse Width | | ● | 75 | | ns | |
| t_{DS} | Data Setup Time | | ● | 60 | | ns | |
| t_{DH} | Data Hold Time | | ● | 5 | | ns | |
| Power Supply | | | | | | | |
| V_{DD} | Supply Voltage | | ● | 14.25 | 15 | 15.75 | V |
| I_{DD} | Supply Current | All Digital Inputs = V_{IH} or V_{IL} | ● | | 2 | | mA |
| | | All Digital Inputs = $0V$ or V_{DD} | ● | 10 | 100 | | μA |

The ● denotes specifications which apply over the full operating temperature range.

Note 1: $\pm 0.5LSB = \pm 0.012\%$ of full scale.

Note 2: Using internal feedback resistor.

Note 3: Guaranteed by design, not subject to test.

Note 4: I_{OUT1} with DAC register loaded to all 0s.

Note 5: Typical temperature coefficient is 100ppm/°C.


Note 6: $OUT1$ load = 100Ω in parallel with 13pF.

Note 7: To 0.01% for a full-scale change, measured from the falling edge of WR , $CS = 0V$.

Note 8: From digital input change to 90% of final analog output.


Note 9: $V_{REF} = 0V$. DAC register contents changed from all 0s to all 1s or all 1s to all 0s.

BLOCK DIAGRAM

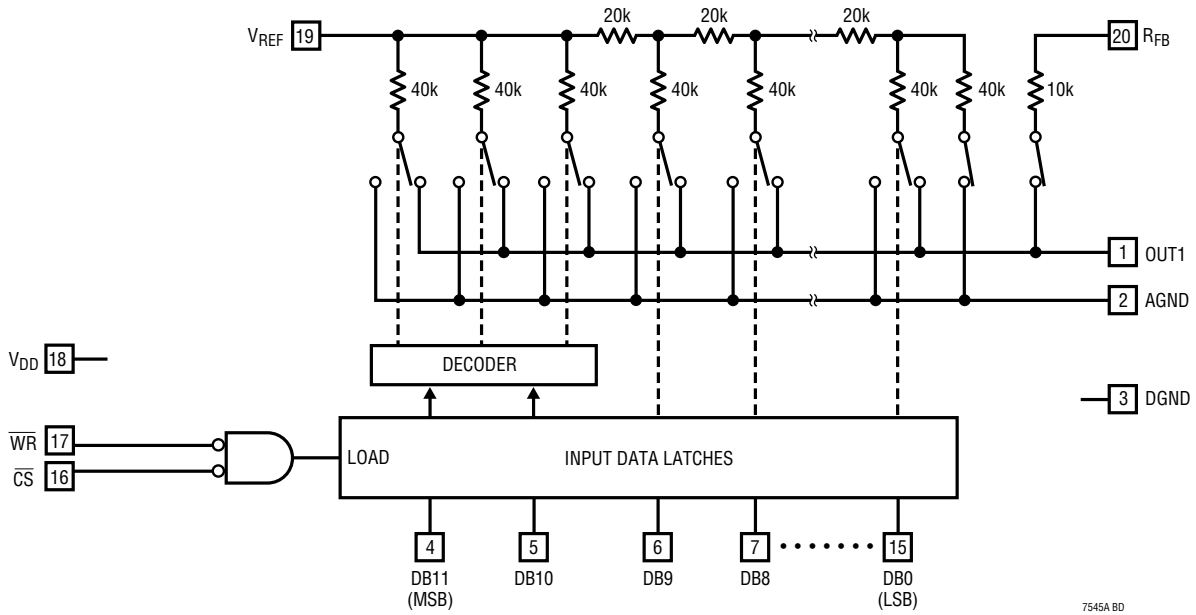

7545A BD


TIMING DIAGRAM

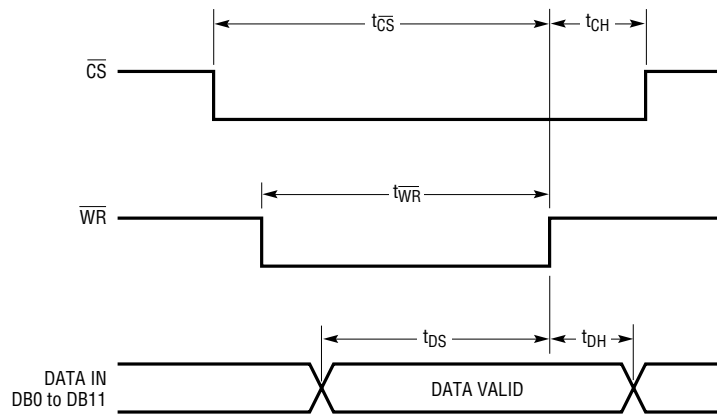

7545A TD

TYPICAL APPLICATIONS

Unipolar Operation (2-Quadrant Multiplication)

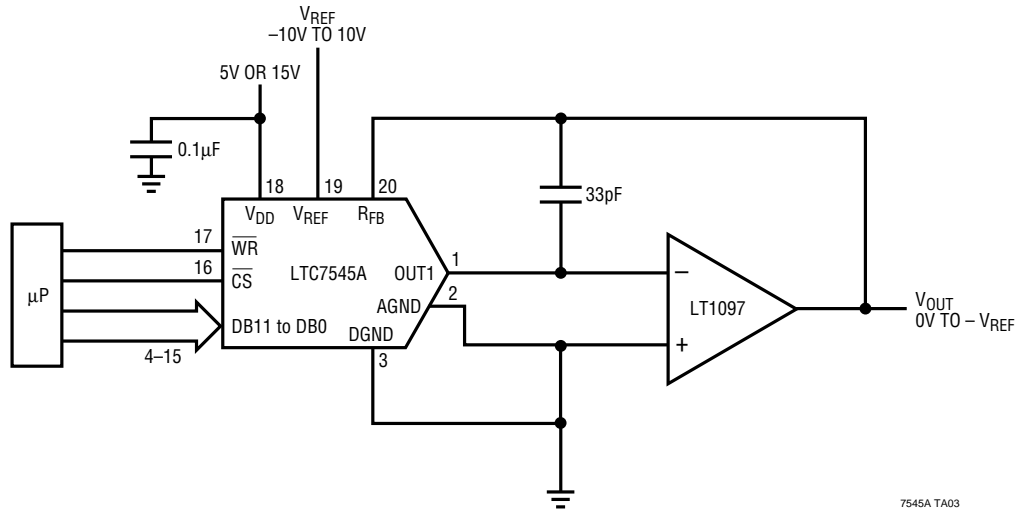


7545A TA03

Table 1. Unipolar Binary Code Table

| DIGITAL INPUT BINARY NUMBER IN DAC LATCH | | | ANALOG OUTPUT V_{OUT} |
|--|------|------|---------------------------------------|
| MSB | | LSB | |
| 1111 | 1111 | 1111 | $-V_{REF}$ (4095/4096) |
| 1000 | 0000 | 0000 | $-V_{REF}$ (2048/4096) = $-V_{REF}/2$ |
| 0000 | 0000 | 0001 | $-V_{REF}$ (1/4096) |
| 0000 | 0000 | 0000 | 0V |

TYPICAL APPLICATIONS

Bipolar Operation (4-Quadrant Multiplication)

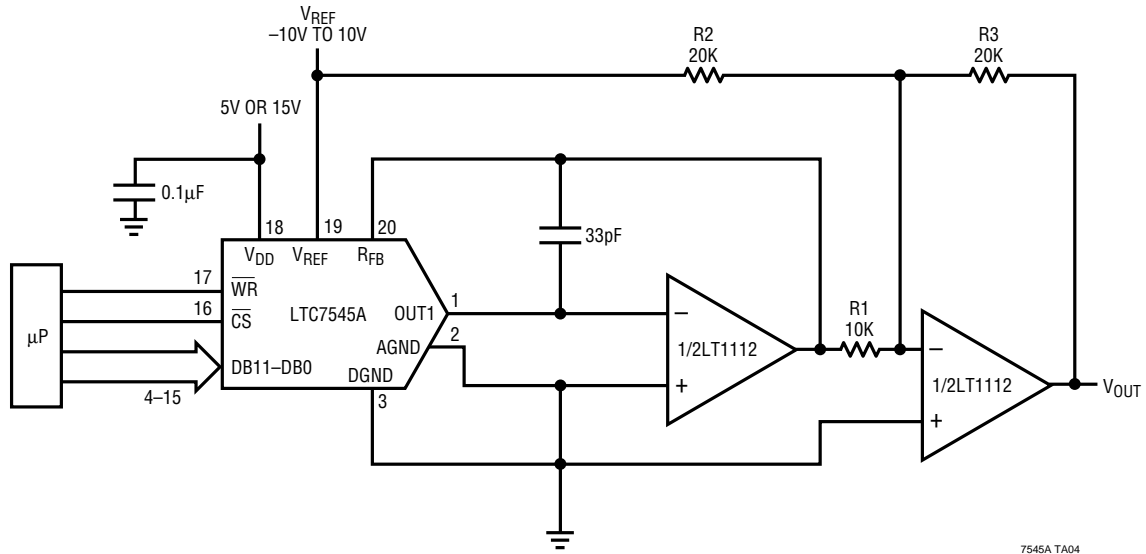


7545A TA04

Table 2. Bipolar Offset Binary Code Table


| DIGITAL INPUT BINARY NUMBER IN DAC LATCH | | | ANALOG OUTPUT V_{OUT} |
|--|------|------|-------------------------------------|
| MSB | | LSB | |
| 1111 | 1111 | 1111 | V_{REF} (2047/2048) |
| 1000 | 0000 | 0001 | V_{REF} (1/2048) |
| 1000 | 0000 | 0000 | 0V |
| 0111 | 1111 | 1111 | $-V_{REF}$ (1/2048) |
| 0000 | 0000 | 0000 | $-V_{REF}$ (2048/2048) = $-V_{REF}$ |

PACKAGE DESCRIPTION Dimensions in inches (millimeters) unless otherwise noted.

G Package
20-Lead Plastic SSOP (0.209)
 (LTC DWG # 05-08-1640)

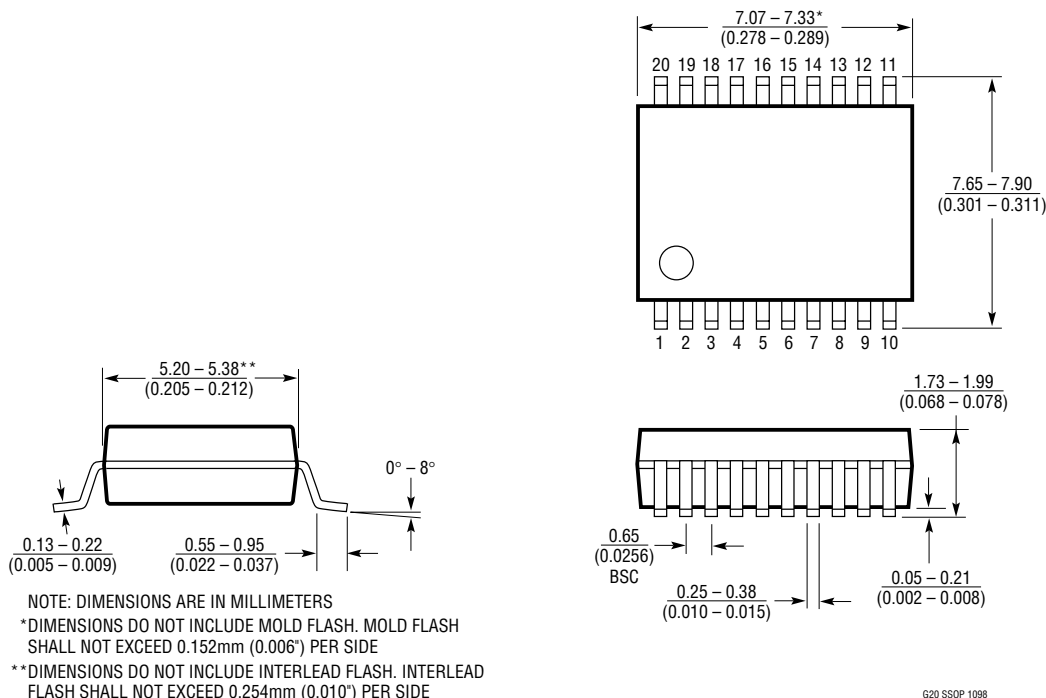


N Package
20-Lead PDIP (Narrow 0.300)
 (LTC DWG # 05-08-1510)

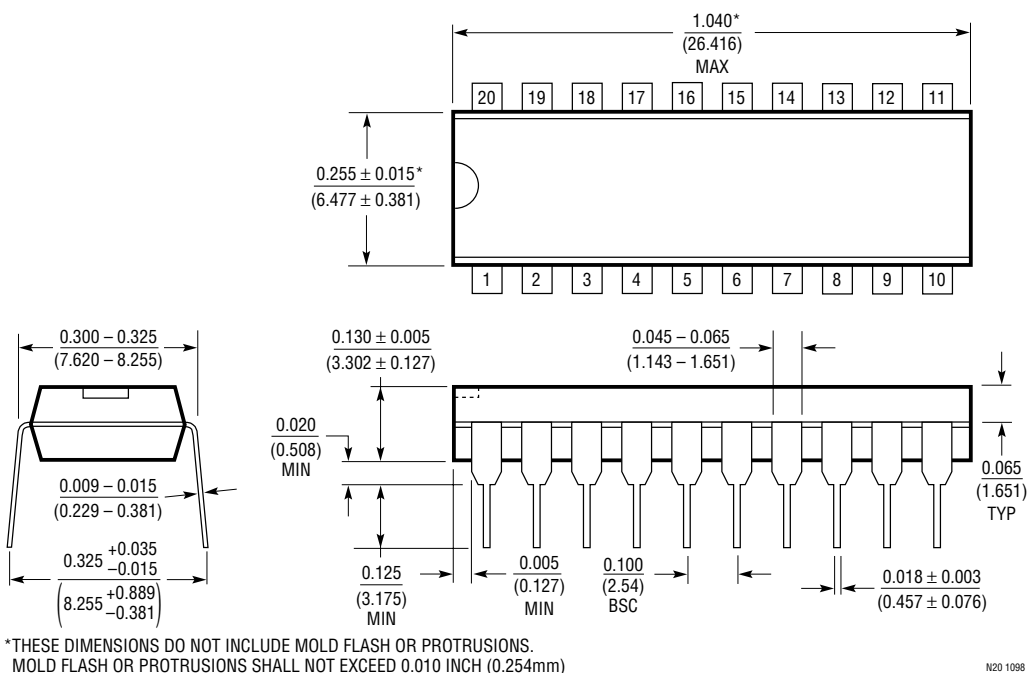

PACKAGE DESCRIPTION Dimensions in inches (millimeters) unless otherwise noted.

SW Package
20-Lead Plastic Small Outline (Wide 0.300)
 (LTC DWG # 05-08-1620)

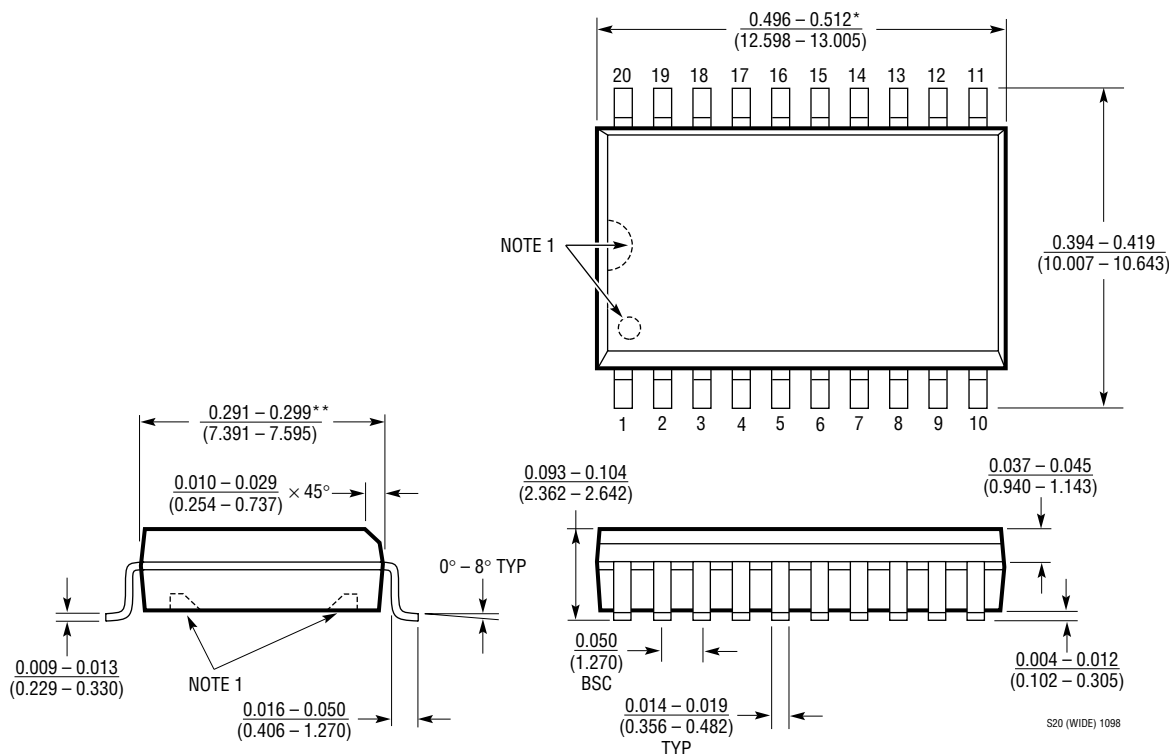

NOTE:
 1. PIN 1 IDENT. NOTCH ON TOP AND CAVITIES ON THE BOTTOM OF PACKAGES ARE THE MANUFACTURING OPTIONS.
 THE PART MAY BE SUPPLIED WITH OR WITHOUT ANY OF THE OPTIONS
 *DIMENSION DOES NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.006" (0.152mm) PER SIDE
 **DIMENSION DOES NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED 0.010" (0.254mm) PER SIDE

RELATED PARTS

| PART NUMBER | DESCRIPTON | COMMENTS |
|-------------------------|--|--|
| LTC1257 | Complete Serial I/O V _{OUT} 12-Bit DAC | 5V to 15V Single Supply in 8-Pin SO and PDIP |
| LTC1450/LTC1450L | Complete Parallel Input V _{OUT} 12-Bit DACs | Rail-to-Rail V _{OUT} , 3V/5V Single Supply, 12-Bit or (8 + 4) Bit Loading |
| LTC1451/LTC1452/LTC1453 | Complete Serial I/O V _{OUT} 12-Bit DACs | Rail-to-Rail V _{OUT} , 3V/5V Single Supply in 8-Pin SO and PDIP |
| LTC7541A | Parallel I/O Multiplying I _{OUT} 12-Bit DAC | 12-Bit Wide Parallel Input |
| LTC7543/LTC8143 | Serial I/O Multiplying I _{OUT} 12-Bit DACs | Clear Pin and Serial Data Output (LTC8143) |
| LTC8043 | Serial I/O Multiplying I _{OUT} 12-Bit DAC | 8-Pin SO and PDIP |

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View LTC7545ALSW#PBF on WIN SOURCE](#)

 [Linear Technology](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management