




**THE DATASHEET OF
JMGSCD-26MW**



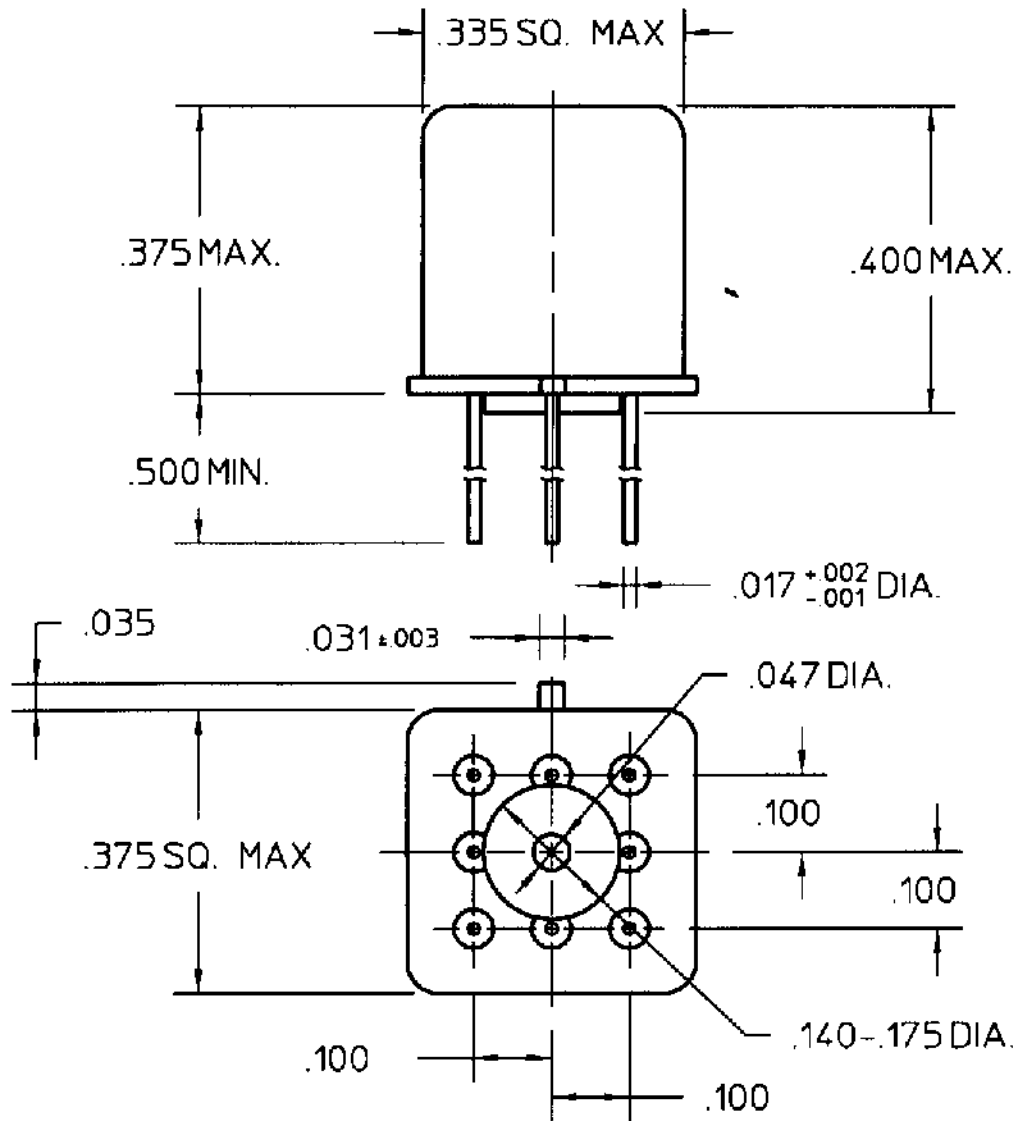


COIL: @ 25°C
 RESISTANCE 3200 OHMS ± 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 14.0 VDC
 MUST RELEASE 8.0 VDC MAX, 1.4 VDC MIN.

ENVIRONMENT:
 VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX
RELEASE TIME 7.5 MS MAX
CONTACT STABILIZATION 2.5 MS MAX

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS MIN

DR. R.B. 5/9/97 CKERRY 5/9/97

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. QPL
 CUST. NO. M39016/42-052M

TYPE JMGSD RELAY

JMGSCD-26MW

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View JMGSCD-26MW](#) on WIN SOURCE
- ⊖ [TE Connectivity](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management