




**THE DATASHEET OF  
MAKK2520H2R2M**



# Spec Sheet

Metal Core Wire-wound Chip Power Inductors (MCOIL(TM) MA series H (High Spec.) type)

## MAKK2520H2R2M

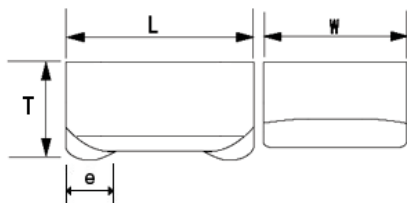

### ■ Features

- Item Summary  
2.2 μH(±20%), 1008
- Lifecycle Stage  
Mass Production
- Standard packaging quantity (minimum)  
Taping 3000pcs

### ■ Products characteristics table

CaseSize (EIA/JIS)	1008/2520
Inductance	2.2 μH(±20%)
Inductance Measuring Frequency	2MHz
Rated Current -Saturation Current	2500mA
Rated Current -Temperature Rise Current	1800mA
DC Resistance (max)	0.12 Ω
DC Resistance (typ)	0.1 Ω
Temperature Range	-40 to +105 °C
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow


### ■ External Dimensions

L	2.5mm ±0.2
W	2mm ±0.2
T	1mm max
e	0.5mm ±0.3

### ■ Recommended Land Patterns

【推奨ランドパターン】  
実装上の注意  
・実装状態を確認の上ご使用くださいませうお願いいたします。  
・本製品のほんだ付けはリフローはんだ工法に限ります。

【Recommended Land Patterns】  
Surface Mounting  
・Mounting and soldering conditions should be checked beforehand.  
・Applicable soldering process to these products is reflow soldering only.



Metal Core Wire-wound Chip Power Inductors (MCOIL<sub>TM</sub>, MA series)

Type	A	B	C
2016	0.7	0.8	1.8
2520	0.8	1.2	2.0

unit: mm

2015.07.25

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.  
TAIYO YUDEN reserves the right to make change to the Date at any time without notice.  
Before making final selection, please check product specification.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View MAKK2520H2R2M on WIN SOURCE](#)
- ⊖ [Taiyo Yuden Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management