



**THE DATASHEET OF
MKM33Z128CLH5**





Ultra-low-power, smart-metering MCUs with precision analog, security and HMI peripherals

Kinetis® M Series MCUs

Kinetis M series MCUs are based on the 32-bit ARM® Cortex®-M0+ core and provide a low-cost, highly integrated solution for one-, two- and three-phase electricity meters that require powerful 32-bit processing capability, precision analog, security, and HMI functionality.

TARGET APPLICATIONS

- ▶ Electricity meters
- ▶ Flow meters (e.g., heat, water, gas)
- ▶ Industrial measurement and sensing

Each MCU includes a powerful analog front end that is configurable for different regions, enabling power calculations with 0.1 percent accuracy. A high-accuracy, real-time clock delivers less than 5 PPM drift over temperature. Metrology firmware for calculating active, reactive and apparent power using a variety of algorithms is provided free of charge. Pre-certified reference designs for Europe, China, India, the U.S. and Japan are available for customer evaluation.

The Kinetis M series is supported by the Tower® System hardware development platform.

SPECIFICATIONS

Kinetis M series MCUs

- ▶ High-performance Cortex-M0+ core, up to 75 MHz of core clock frequency
- ▶ 256/128/64 KB single array flash

- ▶ Supports v6-M instruction set architecture including all 16-bit v7-M instructions plus a number of 32-bit Thumb®-2 instructions
- ▶ Phase-locked loop to generate clocks for analog front end
 - Input range: 31.25–39.0625 kHz
 - Output range: 11.72–14.65 MHz
- ▶ Frequency-locked loop to generate core, system and flash clocks
 - Input range: 31.25–39.0625 kHz
 - Output range: 20–50 MHz
- ▶ Flexible modes of operation
- ▶ Two internal trimmable clock references
 - 32 kHz
 - 4 MHz



Analog front end

- ▶ 24-bit sigma-delta ADC with 94 dB SNR
- ▶ Programmable gain amplifier with gains from 1 to 32 with low temperature drift
- ▶ High-precision internal voltage reference with low temperature drift
- ▶ Up to 16-channel, 16-bit SAR ADC

Security

- ▶ Memory mapped cryptographic acceleration unit (MMCAU) for AES encryption
- ▶ Memory protection unit, AIPS (peripheral protection), random number generator, CRC

Interface

- ▶ LCD segment driver up to 448 (56 x 8) segments
- ▶ High-accuracy RTC ± 5 PPM over temperature range
- ▶ Up to five UART, two SPI, two I²C


Other specifications

- ▶ Voltage range: 1.71–3.6 V (without AFE)
- ▶ Voltage range: 2.7–3.6 V (with AFE)
- ▶ Temperature range: -40 °C to $+105$ °C

KEY FEATURES

- ▶ High-performance ultra-low-power Cortex-M0+ core
- ▶ 24-bit sigma-delta ADC and PGA achieving 94 dB SNR
- ▶ High-accuracy RTC with ± 5 PPM over temperature
- ▶ Rich set of security: MPU, active tamper, RNG for Welmeccompliant meters
- ▶ Pre-certified metrology software

KINETIS M SERIES METERING MCUs

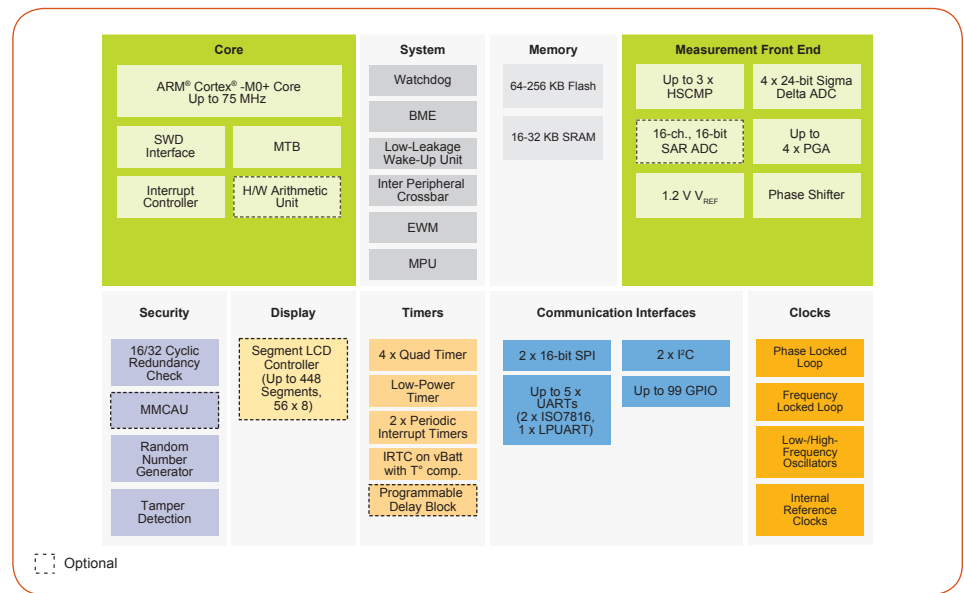

ENABLEMENT

- ▶ TWR-KM34Z75M/TWR-KM34Z50M Tower® System development module
- ▶ Reference designs (available for loan)
 - Low-cost three-phase/single-phase power meters for markets in Asia
 - Three-phase/single-phase power meters for markets in EMEA
 - Two-phase power meter for markets in AMR/JPN

- ▶ Kinetis Design Studio integrated development environment (IDE), a free and unlimited IDE that includes Processor Expert® software configuration tool with Kinetis SDK integration
- ▶ IAR Embedded Workbench®, ARM Keil® MDK IDEs and others from the ARM technology ecosystem
- ▶ Application notes
- ▶ Tower System development platform

KINETIS M SERIES SELECTOR GUIDE

Sub-Family	Part Number	CPU Frequency (MHz)	Flash (KB)	SRAM (KB)	UART (ISO 7816/LPUART)	I ² C	SPI	ADC (24-bit (ΣΔ))	Total I/Os	Package				Development Hardware
										HH	LH	LL	LQ	
										44 LGA (5 x 5, 0.65 mm)	64 LOFP (10 x 10, 0.5 mm)	100 LOFP (14 x 14, 0.5 mm)	144 LOFP (20 x 20, 0.5 mm)	
KM14	MKM14Z128(A)xxx5	50	128	16	2 (2 / -)	1	2	4	20	Y				TWR-KM34Z50M(V3)
	MKM14Z64(A)xxx5	50	64	16	2 (2 / -)	1	2	4	20	Y				TWR-KM34Z50M(V3)
KM33	MKM33Z128(A)xxx5	50	128	16	4 (2 / -)	2	2	3	38–68		Y	Y		TWR-KM34Z50M(V3)
	MKM33Z64(A)xxx5	50	64	16	4 (2 / -)	2	2	3	38–68		Y	Y		TWR-KM34Z50M(V3)
KM34	MKM34Z128(A)xxx5	50	128	16	4 (2 / -)	2	2	4	68			Y		TWR-KM34Z50M(V3)
	MKM34Z256xxx7	75	256	32	5 (2 / 1)	2	2	4	72–99			Y	Y	TWR-KM34Z75M

www.nxp.com/Kinetis/Mseries

NXP, the NXP logo, the Energy Efficient Solutions logo, Freescale, the Freescale logo, CodeWarrior, Kinetis, Processor Expert and Tower are trademarks of NXP B.V. All other product or service names are the property of their respective owners. ARM, Cortex and Keil are registered trademarks of ARM Limited (or its subsidiaries) in the EU and/or elsewhere. mbed is a trademark of ARM Limited (or its subsidiaries) in the EU and/or elsewhere. All rights reserved. © 2012–2016 NXP B.V.

Document Number:
KNTSKM3XFS REV6

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View MKM33Z128CLH5 on WIN SOURCE](#)

 [NXP / Nexperia Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management