



**THE DATASHEET OF
OPF1414T**




High Speed Fiber Optic Transmitter



OPF1412T, OPF1414, OPF1414T

Features:


- Low cost
- High speed
- No mounting hardware required
- Wide temperature range
- 100% LED burn-in (96 hours)
- SMA or ST style ports
- Wave solderable



T-Package


Description:

The OPF1412F and OPF1414 series fiber optic transmitters contain a high speed 840 nm GaAlAs LED. This LED in conjunction with the package lensing is designed to efficiently couple light into multimode optical fibers ranging in size from 50/125 μm up to 200/230 μm . The high coupling efficiency of the LED and lensing allows the devices to be used at low current drive levels thus decreasing the power consumption and increasing system reliability. The consistency of coupling varies by less than 5 dB from part to part which reduces the dynamic range requirements of the receiver. The high power (-16.0 dBm into 50/125 μm) OPF1414 was designed for small fiber applications or where there are large fixed losses such as in systems that contain star couplers or in line connectors.

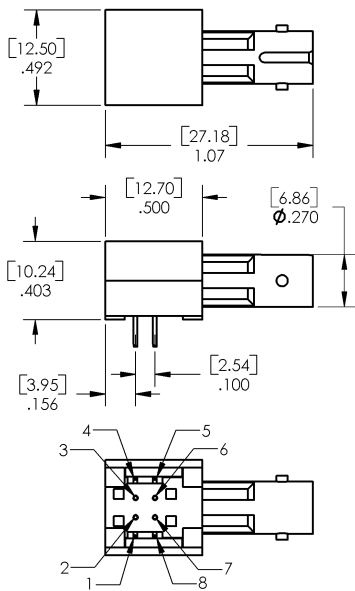

OPF1414

PINS 1, 4, 5, & 8 - .020 X .015
[0.51 X 0.38]
PINS 2, 3, 6, & 7 - Ø.018
[0.46]
DIMENSIONS ARE IN INCHES AND [MILLIMETERS].

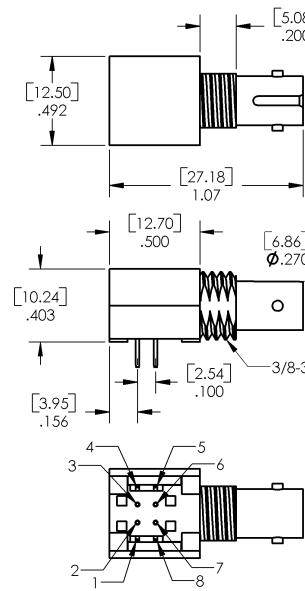

**OPF1412T
OPF1414T**

PINS 1, 4, 5, & 8 - .020 X .015
[0.51 X 0.38]
PINS 2, 3, 6, & 7 - Ø.018
[0.46]
DIMENSIONS ARE IN INCHES AND [MILLIMETERS].

| Pin # | Description | Pin # | Description |
|-------|---------------|-------|---------------|
| 1 | No Connection | 8 | No Connection |
| 2 | Anode | 7 | Anode |
| 3 | Cathode | 6 | Anode |
| 4 | No Connection | 5 | No Connection |

| Part Number | Typ. dBm into 50/125 μm @ 60mA | Typ. dBm into 100/140 μm @ 60mA |
|-------------|---|--|
| OPF1412T | -16.0 | -12.0 |
| OPF1414 | -12.0 | -6.5 |
| OPF1414T | -12.0 | -6.5 |



RoHS

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
sensors@ttelelectronics.com | www.ttelelectronics.com

Electrical Specifications

| Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted) | |
|--|--------------------------|
| Storage Temperature Range | -55°C to +85°C |
| Operating Temperature Range | -40°C to +85°C |
| Forward Input Current | Peak 200 mA DC 100 mA |
| Reverse Input Voltage | 1.8 V |
| Lead Soldering Temperature (1/16" (1.6 mm) from case for 5 seconds with soldering iron) ⁽¹⁾ | 260° C |

Notes:

(1) All parameters tested using pulse technique.

| Electrical Characteristics ($T_A = -40^\circ\text{C}$ to +85° C unless otherwise noted) Typ. values are at 25° C. | | | | | | |
|--|---|------|------------------|------|-------|---|
| SYMBOL | PARAMETER | MIN | TYP | MAX | UNITS | TEST CONDITIONS |
| V_F | Forward Voltage | 1.48 | 1.70 1.84 | 2.09 | V | $I_F = 60\text{ mA}$ $I_F = 100\text{ mA}$ |
| V_F/T | Forward Voltage Temperature Coefficient | | -0.20 | | mV/°C | $I_F = 60\text{ mA}$ |
| V_{BR} | Reverse Input Voltage | 1.8 | 3.8 | | V | $I_R = 100\ \mu\text{A}$ |
| λ_p | Peak Emission Wavelength | 820 | 840 | 865 | nm | $I_F = 60\text{ mA}$ |
| C_T | Diode Capacitance | | 55 | | pF | $V = 0, f = 1\text{ MHz}$ |
| P_T/T | Optical Power Temperature Coefficient | | -0.008 -0.020 | | dB/°C | $I_F = 60\text{ mA}$ $I_F = 100\text{ mA}$ |
| t_r, t_f | Rise Time, Fall Time (10% to 90%) | | 4.0 | 6.5 | ns | $I_F = 60\text{ mA}$, no pre-bias |

Peak Output Optical Power

| SYMBOL | PARAMETER | 1412 | | | 1414 | | | UNITS | TEST CONDITIONS |
|------------|--|-------|-------|-------|-------|-------|-------|-------|---|
| | | MIN | TYP | MAX | MIN | TYP | MAX | | |
| P_{T100} | 100/140 μm Fiber Cable N.A. = 0.30 | -15.0 | -12.0 | -10.0 | -9.5 | -6.5 | -4.5 | dBm | $I_F = 60\text{ mA}, T_A = 25^\circ\text{C}$ $I_F = 100\text{ mA}, T_A = 25^\circ\text{C}$ |
| | | -13.5 | -10.0 | -7.6 | -8.0 | -4.5 | -2.1 | | |
| P_{T62} | 62.5/125 μm Fiber Cable N.A. = 0.275 | -19.0 | -16.0 | -14.0 | -15.0 | -12.0 | -10.0 | dBm | $I_F = 60\text{ mA}, T_A = 25^\circ\text{C}$ $I_F = 100\text{ mA}, T_A = 25^\circ\text{C}$ |
| | | -17.5 | -14.0 | -11.6 | -13.5 | -10.0 | -7.6 | | |
| P_{T50} | 50/125 μm Fiber Cable N.A. = 0.20 | -21.8 | -18.8 | -16.8 | -18.8 | -15.8 | -13.8 | dBm | $I_F = 60\text{ mA}, T_A = 25^\circ\text{C}$ $I_F = 100\text{ mA}, T_A = 25^\circ\text{C}$ |
| | | -20.3 | -16.8 | -14.4 | -17.3 | -13.8 | -11.4 | | |


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


TT Electronics | OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
sensors@ttelelectronics.com | www.ttelelectronics.com

Performance

Relative Coupled Power vs Forward Current

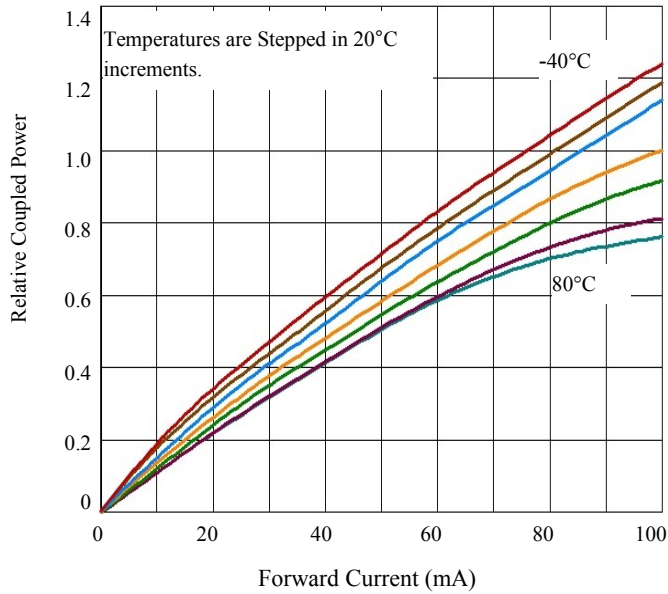

Typical Forward Voltage vs Forward Current

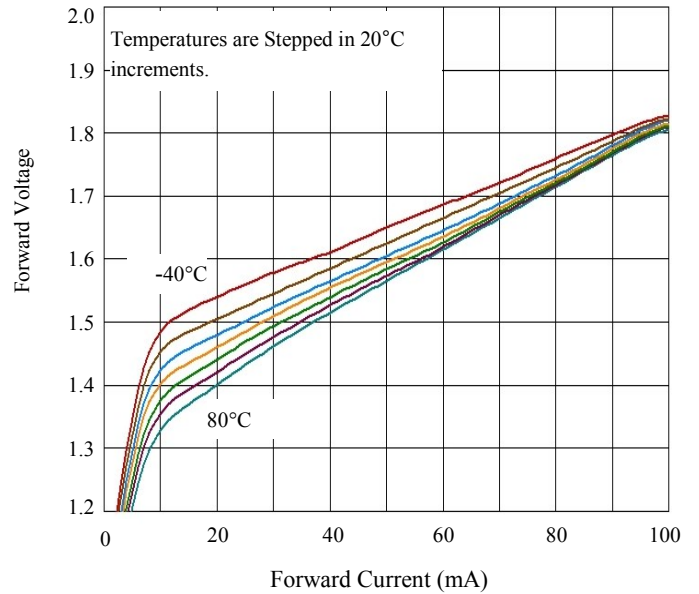

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTeK Technology, Inc.
 1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
sensors@ttelectronics.com | www.ttelectronics.com

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View OPF1414T on WIN SOURCE](#)

 [TT Electronics](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management