



**THE DATASHEET OF
OSTOQ200150**



Technical data

1. Nominal voltage: PITCH: 7.62mm
2. Insulation With AC 1600V/MIN
3. Insulation Resistance 1000MΩ or more
4. Operating temperature
5. Soldering temperature
6. Safety approval:
7. RoHS Compliance
8. Undimensioned

Dim. L = P x 7.62
 Dim. B = (P - 1) x 7.62
 P = number of pins





0-30mm
 over 30mm-60mm
 over 60mm-90mm
 over 90mm

Part No.:

OST00X

No. of
 02 2
 03 3
 ...
 16 16

Nonsta
 Mins co

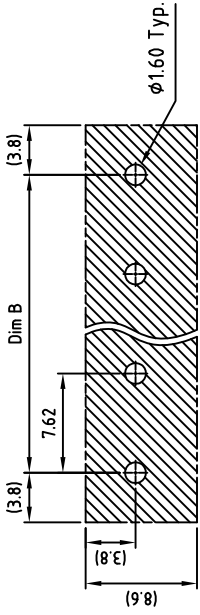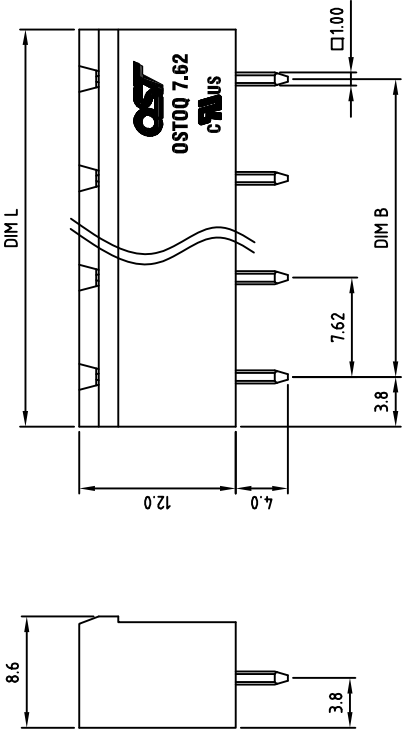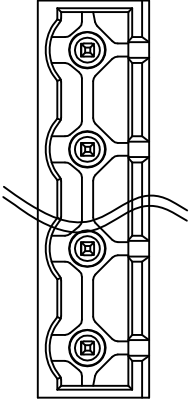

PCB LAYOUT



ON-SHORE TECHNOLOGY, INC.

REV	SIGN	DESCRIPTION	CHK.	DATE

2	PIN	COPPER
1	BODY	PA66 UL94V-0
ITEM NAME OF PART		MATL
DWG	Marvin Zhang	DATE 2019.01.15
CHK	Marvin Zhang	DATE 2019.01.15
APP		DATE

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View OSTOQ200150 on WIN SOURCE](#)

 [On Shore Technology Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management