



BFS200

Unregulated Brute Force Power Supplies

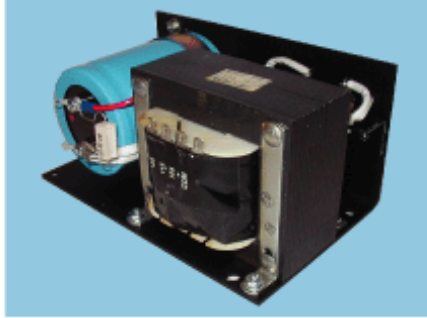

[Click Drawing to enlarge](#)

Features:

- Open frame
- Fully isolated output
- Input/output isolation: 1500 VAC
- Warranty – 5 years

Environmental

- Operating temperature.....0° C to 40° C
- Storage temperature.....-55° C to 85° C

EMI

Meets FCC class B, CISPR 22 class B

Safety

UL recognized

Electrical specifications

Input

- Voltage.....105/115/125 VAC
- Frequency.....47-400 Hz
- Input connector.....Transformer lugs

Output

- Unregulated: +/-10% full load
- Ripple/noise +/-3% RMS, DC to 50MHz

Mechanical:

- Size: 8.1 x 3.9 x 5.0 inches
- Weight: 12 lbs

Specifications:

Elpac Part #	Vdc	Amps	Watts	No load	Full load
				Volts	Volts
BFS200-12	12	15	200	15.4	12.5
BFS200-20	20	10	200	24.5	20
BFS200-24	24	7.5	200	32.2	27.3
BFS200-48	48	4	200	55.2	46.4

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View BFS200-24 on WIN SOURCE](#)
- [Inventus Power Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management