



**THE DATASHEET OF  
ROV05-180M-S**



# ROV05, ROV05H

## 5mm Series Metal Oxide Varistors

www.circuitprotection.com

Document: SCD 25480  
Status: Released  
Rev. C May 18, 2005

### GENERAL DESCRIPTION

The ROV05-XXX (Radial-leaded Metal Oxide Varistor) products are 5mm radial leaded varistor devices suitable for protection of overvoltage transients.

ROV devices can provide protection for a wide variety of power systems against overvoltage faults such as lightning, power contact and power induction. Suitable for a broad range of applications including, but not limited to security, power supplies, surge strips, etc., the ROV device helps to protect valuable equipment from potential power surge damage by clamping high energy, short duration impulses. The ROV devices have high current handling and energy absorption capability and fast response times to help protect against transient faults.


### FEATURES

- Radial leaded
- Broad Varistor voltage and  $V_{rms}$  range
  - Varistor voltage : 18V - 750V
  - $V_{rms}$  voltage : 11V - 460V
- Two surge capability series
  - Standard series, High surge series
- Various lead types
  - Straight, Kinked, Other
- Various packaging options
  - Bulk, Tape & Reel, Ammo Pack
- Helps designers meet the following standards
  - UL, CSA, VDE
- Fast response time
- High current and energy absorption capability

### APPLICATIONS

- Power supplies and power systems
- Line voltage
- Telecommunications systems
- Automotive systems
- Appliances

### TYPICAL APPLICATION SCHEMATIC

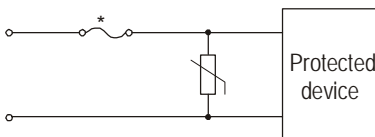

\*In some applications, a polymeric PTC device such as a Tyco Electronics PolySwitch device may be used instead of a fuse to provide a preferred solution.

### MATERIALS INFORMATION

RoHS Compliant

ELV Compliant

Directive 2002/95/EC  
Compliant

Directive 2000/53/EC  
Compliant

\*After May 1, 2005 all ROV devices will be produced as RoHS compliant devices.




# ROV05, ROV05H

## 5mm Series Metal Oxide Varistors

www.circuitprotection.com

Document: SCD 25480  
Status: Released  
Rev. C May 18, 2005

### PART NUMBERING

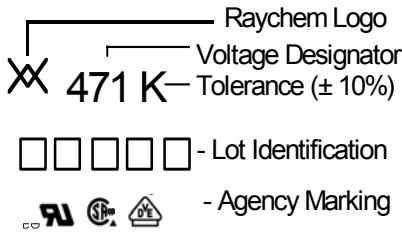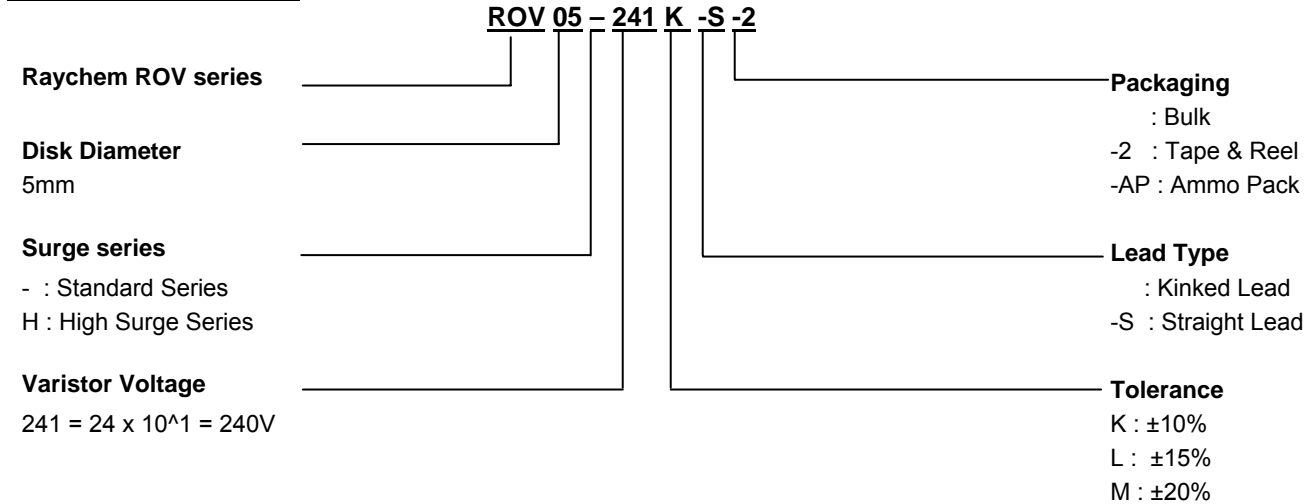

**Lot Identification**  
RoHS compliant devices: 4 characters  
Non RoHS compliant devices: 5 characters with M at the end.

### GENERAL CHARACTERISTICS

|   |                         |
|---|-------------------------|
| Storage temperature:                          | -40°C ... +125°C        |
| Maximum operating temperature:                | -40°C ... + 85°C        |
| Maximum working surface temperature:          | +115°C                  |
| Temperature coefficient of voltage:           | 0 ... +0.05% / °C max.  |
| Insulation resistance of coating (@ 500 VDC): | Over 1000MΩ             |
| Maximum response time:                        | 25ns                    |
| Lead Material:                                | 22 AWG Sn Plated Copper |

### AGENCY RECOGNITION

Device Ratings and Characteristics Tables contain specific recognition information for each individual part. The table below details marking symbols for each agency recognition type.

|        |                         |     |     |
|--------|-------------------------|-----|-----|
| UL1414 | UL1449<br>(2nd Edition) | CSA | VDE |
| ◆      | ●                       | ▲   | ■   |

# ROV05, ROV05H

## 5mm Series Metal Oxide Varistors

www.circuitprotection.com

Document: SCD 25480  
Status: Released  
Rev. C May 18, 2005

### DEVICE RATINGS AND CHARACTERISTICS

#### STANDARD SERIES

| Part Number | Varistor Voltage<br>V@0.1mA |           | Maximum Allowable Voltage              |                    | Maximum Clamping Voltage<br>V@5A | Maximum Surge Current<br>(8x20us) |                   | Rated Wattage | Energy<br>(10x1000us) | Capacitance<br>(Typical) | Certifications |
|-------------|-----------------------------|-----------|--|--------------------|----------------------------------|-----------------------------------|-------------------|---------------|-----------------------|--------------------------|----------------|
|             | (V <sub>DC</sub> )          | Tolerance | V <sub>rms</sub><br>(V <sub>AC</sub> ) | (V <sub>DC</sub> ) | (V <sub>DC</sub> )               | 1<br>Time<br>(A)                  | 2<br>Times<br>(A) | (W)           | (J)                   | @1kHz<br>(pF)            |                |
| ROV05-180M  | 18                          | ± 20%     | 11                                     | 14                 | 40 <sup>1)</sup>                 | 100                               | 50                | 0.01          | 0.6                   | 1121                     | ● ■*           |
| ROV05-220L  | 22                          | ± 15%     | 14                                     | 18                 | 48 <sup>1)</sup>                 |                                   |                   |               | 0.7                   | 1233                     | ● ■*           |
| ROV05-270K  | 27                          | ± 10%     | 17                                     | 22                 | 60 <sup>1)</sup>                 |                                   |                   |               | 0.9                   | 1073                     | ● ■*           |
| ROV05-330K  | 33                          |           | 20                                     | 26                 | 73 <sup>1)</sup>                 |                                   |                   |               | 1.1                   | 834                      | ● ■*           |
| ROV05-390K  | 39                          |           | 25                                     | 31                 | 86 <sup>1)</sup>                 |                                   |                   |               | 1.2                   | 877                      | ● ■*           |
| ROV05-470K  | 47                          |           | 30                                     | 38                 | 104 <sup>1)</sup>                |                                   |                   |               | 1.5                   | 715                      | ● ■*           |
| ROV05-560K  | 56                          |           | 35                                     | 45                 | 123 <sup>1)</sup>                |                                   |                   |               | 1.8                   | 643                      | ● ■*           |
| ROV05-680K  | 68                          |           | 40                                     | 56                 | 150 <sup>1)</sup>                |                                   |                   |               | 2.1                   | 501                      | ● ■*           |
| ROV05-820K  | 82                          |           | 50                                     | 65                 | 145                              |                                   |                   |               | 2.8                   | 269                      | ● ■            |
| ROV05-101K  | 100                         |           | 60                                     | 85                 | 175                              |                                   |                   |               | 3.5                   | 263                      | ● ■            |
| ROV05-121K  | 120                         |           | 75                                     | 100                | 210                              |                                   |                   |               | 4.0                   | 180                      | ● ■            |
| ROV05-151K  | 150                         |           | 95                                     | 125                | 260                              |                                   |                   |               | 5.5                   | 180                      | ● ■            |
| ROV05-181K  | 180                         |           | 115                                    | 150                | 320                              |                                   |                   |               | 6.5                   | 95                       | ● ■            |
| ROV05-201K  | 200                         |           | 130                                    | 170                | 355                              |                                   |                   |               | 7.1                   | 85                       | ◆ ● ▲ ■        |
| ROV05-221K  | 220                         |           | 140                                    | 180                | 380                              | 7.8                               | 80                | ◆ ● ▲ ■       |                       |                          |                |
| ROV05-241K  | 240                         |           | 150                                    | 200                | 415                              | 8.4                               | 74                | ◆ ● ▲ ■       |                       |                          |                |
| ROV05-271K  | 270                         | 175       | 225                                    | 475                | 9.9                              | 69                                | ◆ ● ▲ ■           |               |                       |                          |                |
| ROV05-301K  | 300                         | 195       | 250                                    | 525                | 400                              | 200                               | 0.1               | 10.5          | 65                    | ◆ ● ▲ ■                  |                |
| ROV05-331K  | 330                         | 210       | 275                                    | 575                |                                  |                                   |                   | 11.5          | 60                    | ◆ ● ▲ ■                  |                |
| ROV05-361K  | 360                         | 230       | 300                                    | 620                |                                  |                                   |                   | 13.0          | 69                    | ◆ ● ▲ ■                  |                |
| ROV05-391K  | 390                         | 250       | 320                                    | 675                |                                  |                                   |                   | 15.0          | 56                    | ◆ ● ▲ ■                  |                |
| ROV05-431K  | 430                         | 275       | 350                                    | 745                |                                  |                                   |                   | 16.5          | 47                    | ◆ ● ▲ ■                  |                |
| ROV05-471K  | 470                         | 300       | 385                                    | 810                |                                  |                                   |                   | 17.5          | 50                    | ◆ ● ▲ ■                  |                |
| ROV05-511K  | 510                         | 320       | 418                                    | 880                |                                  |                                   |                   | 18.5          | 50                    | ◆ ● ▲ ■*                 |                |
| ROV05-561K  | 560                         | 350       | 460                                    | 940                |                                  |                                   |                   | 19.5          | 50                    | ◆ ● ▲ ■*                 |                |
| ROV05-621K  | 620                         | 385       | 505                                    | 1050               |                                  |                                   |                   | 20.5          | 50                    | ◆ ● ▲ ■*                 |                |
| ROV05-681K  | 680                         | 420       | 560                                    | 1150               |                                  |                                   |                   | 21.5          | 43                    | ◆ ● ▲ ■*                 |                |
| ROV05-751K  | 750                         | 460       | 615                                    | 1290               |                                  |                                   |                   | 22.5          | ----                  | ◆ ● ▲ ■*                 |                |

\* Pending VDE recognition

1) The clamping voltage for devices ROV05-180M to ROV05-680K is tested with 1A current.

**ROV05, ROV05H**  
5mm Series Metal Oxide Varistors

www.circuitprotection.com

Document: SCD 25480  
Status: Released  
Rev. C May 18, 2005

**PULSE LIFETIME RATING CURVES**



**V-I CHARACTERISTIC CURVES**

**STANDARD SERIES**

**STANDARD SERIES**



**ROV05-180M – ROV05-680K**

**ROV05-180M – ROV05-680K**

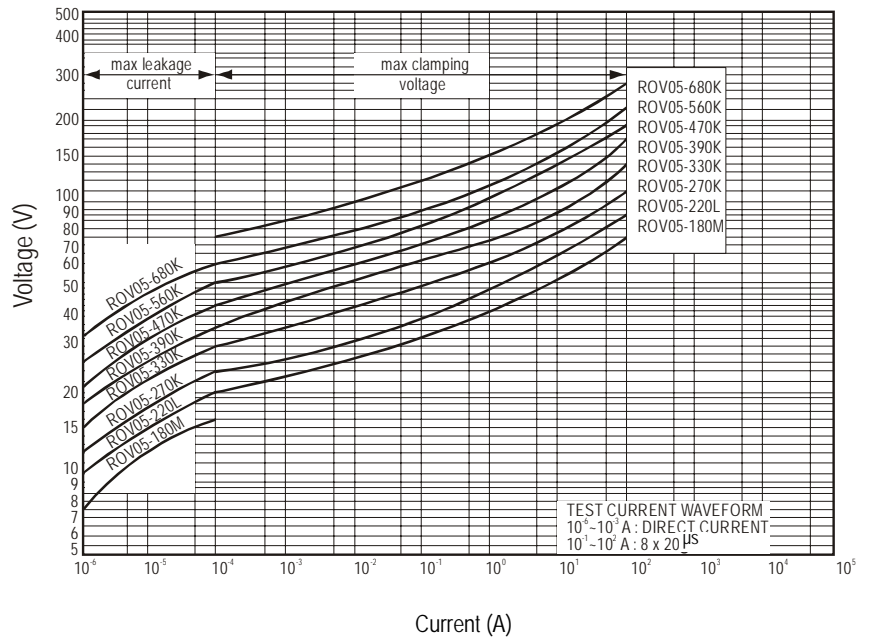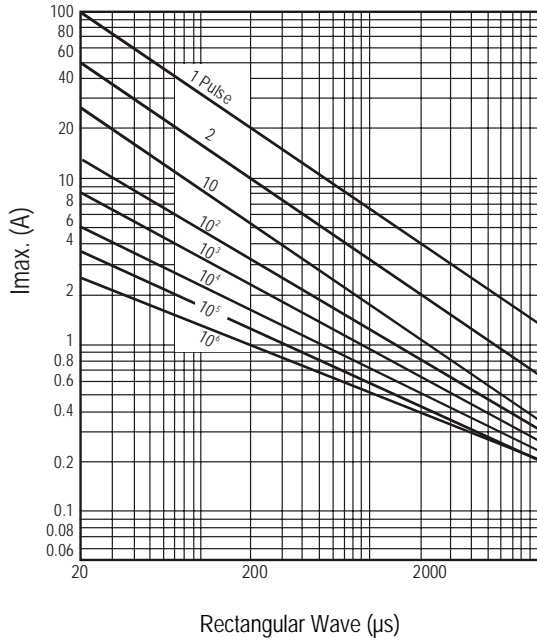

**ROV05-820K – ROV05-471K**

**ROV05-820K – ROV05-471K**

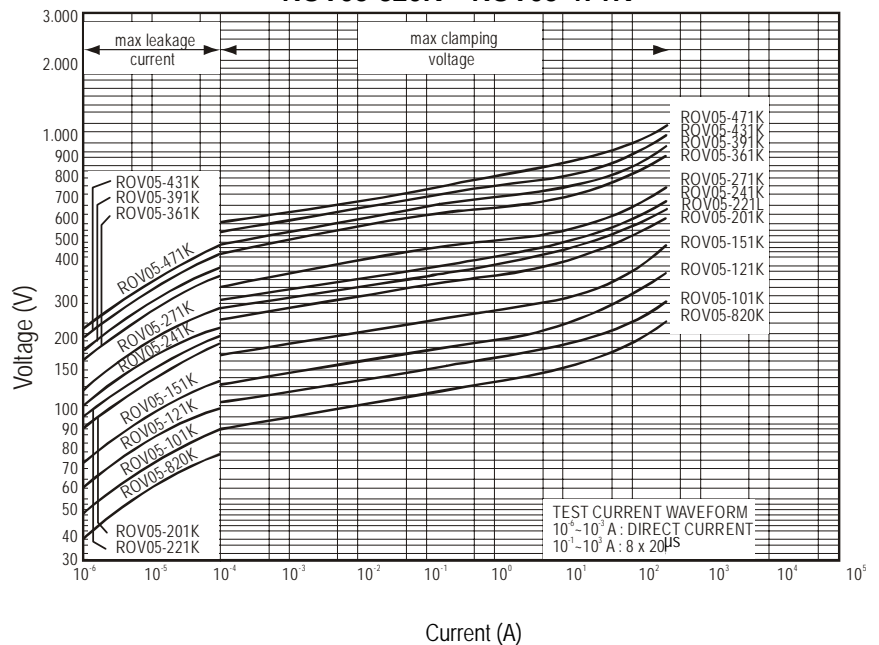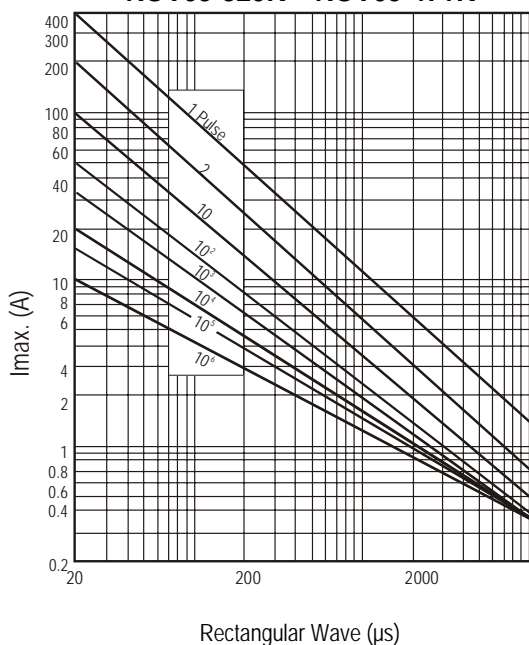

# ROV05, ROV05H 5mm Series Metal Oxide Varistors

www.circuitprotection.com

Document: SCD 25480  
Status: Released  
Rev. C May 18, 2005

## DEVICE RATINGS AND CHARACTERISTICS

### HIGH SURGE SERIES

| Part Number | Varistor Voltage<br>V@0.1mA |           | Maximum Allowable Voltage              |                    | Maximum Clamping Voltage<br>V@5A | Maximum Surge Current<br>(8x20us) |                   | Rated Wattage | Energy<br>(10x1000us) | Capacitance<br>(Typical) | Certifications |
|-------------|-----------------------------|-----------|--|--------------------|----------------------------------|-----------------------------------|-------------------|---------------|-----------------------|--------------------------|----------------|
|             | (V <sub>DC</sub> )          | Tolerance | V <sub>rms</sub><br>(V <sub>AC</sub> ) | (V <sub>DC</sub> ) | (V <sub>DC</sub> )               | 1<br>Time<br>(A)                  | 2<br>Times<br>(A) | (W)           | (J)                   | @1kHz<br>(pF)            |                |
| ROV05H180M  | 18                          | ± 20%     | 11                                     | 14                 | 40 <sup>1)</sup>                 | 250                               | 125               | 0.01          | 0.7                   | 1120                     | ● ■*           |
| ROV05H220L  | 22                          | ± 15%     | 14                                     | 18                 | 48 <sup>1)</sup>                 |                                   |                   |               | 0.8                   | 1230                     | ● ■*           |
| ROV05H270K  | 27                          | ± 10%     | 17                                     | 22                 | 60 <sup>1)</sup>                 |                                   |                   |               | 1.1                   | 1070                     | ● ■*           |
| ROV05H330K  | 33                          |           | 20                                     | 26                 | 73 <sup>1)</sup>                 |                                   |                   |               | 1.3                   | 830                      | ● ■*           |
| ROV05H390K  | 39                          |           | 25                                     | 31                 | 86 <sup>1)</sup>                 |                                   |                   |               | 1.5                   | 880                      | ● ■*           |
| ROV05H470K  | 47                          |           | 30                                     | 38                 | 104 <sup>1)</sup>                |                                   |                   |               | 1.8                   | 720                      | ● ■*           |
| ROV05H560K  | 56                          |           | 35                                     | 45                 | 123 <sup>1)</sup>                |                                   |                   |               | 2.2                   | 640                      | ● ■*           |
| ROV05H680K  | 68                          |           | 40                                     | 56                 | 150 <sup>1)</sup>                |                                   |                   |               | 2.6                   | 500                      | ● ■*           |
| ROV05H820K  | 82                          |           | 50                                     | 65                 | 145                              | 3.5                               | 270               | ● ■*          |                       |                          |                |
| ROV05H101K  | 100                         |           | 60                                     | 85                 | 175                              | 4.5                               | 260               | ● ■*          |                       |                          |                |
| ROV05H121K  | 120                         | 75        | 100                                    | 210                | 5.5                              | 180                               | ● ■*              |               |                       |                          |                |
| ROV05H151K  | 150                         | 95        | 125                                    | 260                | 6.5                              | 180                               | ● ■*              |               |                       |                          |                |
| ROV05H181K  | 180                         | 115       | 150                                    | 320                | 8.0                              | 95                                | ● ■*              |               |                       |                          |                |
| ROV05H201K  | 200                         | 130       | 170                                    | 355                | 8.5                              | 85                                | ◆ ● ▲ ■*          |               |                       |                          |                |
| ROV05H221K  | 220                         | 140       | 180                                    | 380                | 9.0                              | 80                                | ◆ ● ▲ ■*          |               |                       |                          |                |
| ROV05H241K  | 240                         | 150       | 200                                    | 415                | 10.5                             | 75                                | ◆ ● ▲ ■*          |               |                       |                          |                |
| ROV05H271K  | 270                         | 175       | 225                                    | 475                | 11.0                             | 70                                | ◆ ● ▲ ■*          |               |                       |                          |                |
| ROV05H301K  | 300                         | 195       | 250                                    | 525                | 800                              | 600                               | 0.10              | 12.0          | 65                    | ◆ ● ▲ ■*                 |                |
| ROV05H331K  | 330                         | 210       | 275                                    | 575                |                                  |                                   |                   | 13.0          | 60                    | ◆ ● ▲ ■*                 |                |
| ROV05H361K  | 360                         | 230       | 300                                    | 620                |                                  |                                   |                   | 16.0          | 70                    | ◆ ● ▲ ■*                 |                |
| ROV05H391K  | 390                         | 250       | 320                                    | 675                |                                  |                                   |                   | 17.0          | 55                    | ◆ ● ▲ ■*                 |                |
| ROV05H431K  | 430                         | 275       | 350                                    | 745                |                                  |                                   |                   | 20.0          | 45                    | ◆ ● ▲ ■*                 |                |
| ROV05H471K  | 470                         | 300       | 385                                    | 810                |                                  |                                   |                   | 21.0          | 50                    | ◆ ● ▲ ■*                 |                |
| ROV05H511K  | 510                         | 320       | 418                                    | 880                |                                  |                                   |                   | 22.0          | 50                    | ◆ ● ▲ ■*                 |                |
| ROV05H561K  | 560                         | 350       | 460                                    | 940                |                                  |                                   |                   | 25.0          | 50                    | ◆ ● ▲ ■*                 |                |
| ROV05H621K  | 620                         | 385       | 505                                    | 1050               | 27.0                             | 50                                | ◆ ● ▲ ■*          |               |                       |                          |                |
| ROV05H681K  | 680                         | 420       | 560                                    | 1150               | 28.0                             | 40                                | ◆ ● ▲ ■*          |               |                       |                          |                |
| ROV05H751K  | 750                         | 460       | 615                                    | 1290               | 29.0                             | ----                              | ◆ ● ▲ ■*          |               |                       |                          |                |

\* Pending VDE Recognition

1). The clamping voltage for devices ROV05H180M to ROV05H680K is tested with 1A current.

**ROV05, ROV05H**  
5mm Series Metal Oxide Varistors


www.circuitprotection.com

Document: SCD 25480  
Status: Released  
Rev. C May 18, 2005

**PULSE LIFETIME RATING CURVES**

**HIGH SURGE SERIES**

**ROV05H180M – ROV05H680K**

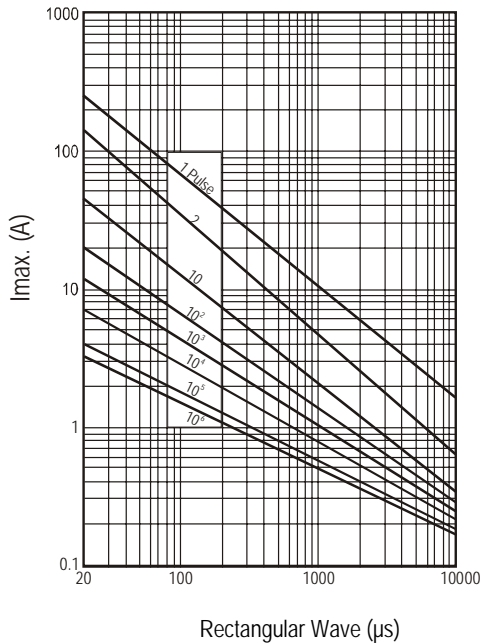


Rectangular Wave (μs)

**V-I CHARACTERISTIC CURVES**


**HIGH SURGE SERIES**

**ROV05H180M – ROV05H680K**

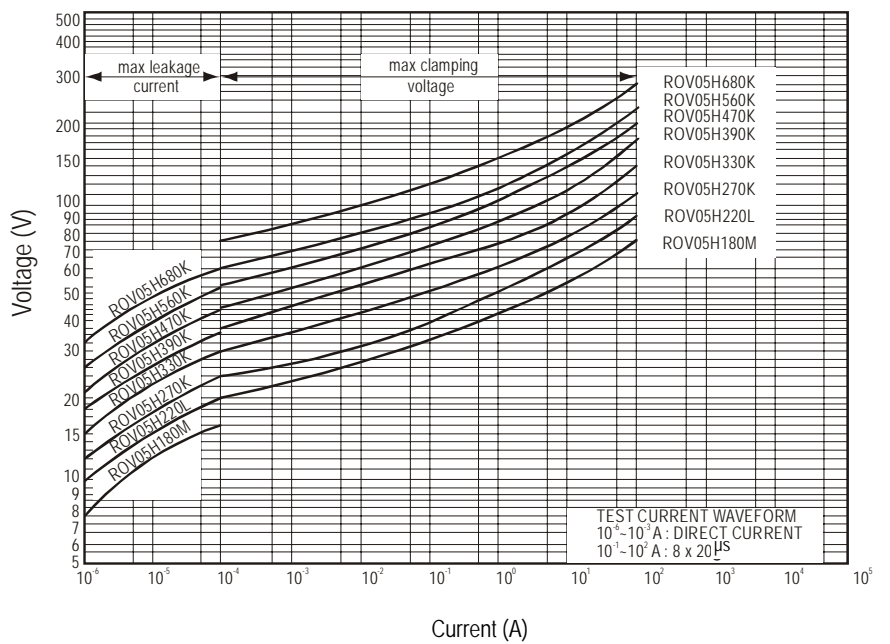


Current (A)

**ROV05H820K – ROV05H471K**

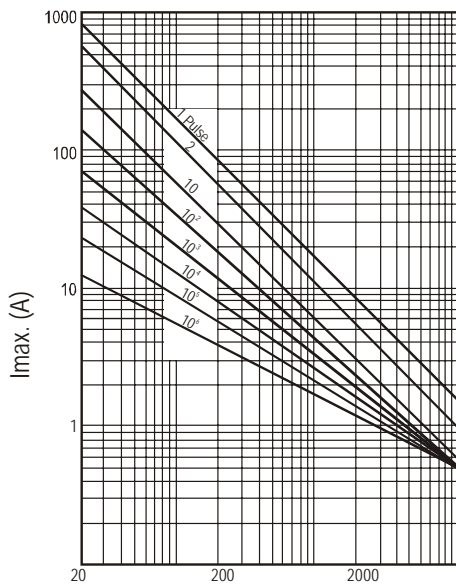

Rectangular Wave (μs)

**ROV05H820K – ROV05H471K**

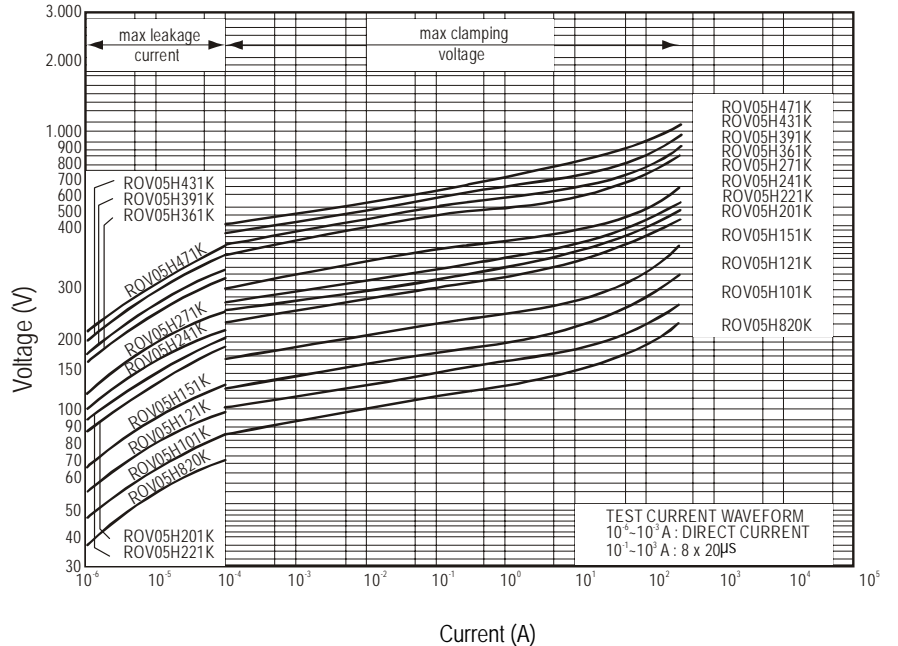


Current (A)

**ROV05, ROV05H**  
5mm Series Metal Oxide Varistors

www.circuitprotection.com


Document: SCD 25480  
Status: Released  
Rev. C May 18, 2005

**DIMENSIONS**

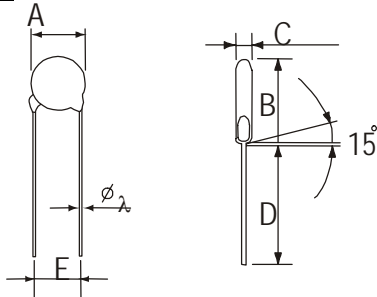

**KINKED LEAD TYPE**  
Dimension Table

|                    |      |
|--------------------|------|
| A max.             | 7.5  |
| $\lambda \pm 0.05$ | 0.6  |
| $E \pm 1.0$        | 5.0  |
| B max.             | 11.0 |
| $D_1$ min.         | 25.0 |
| D min.             | 24.0 |

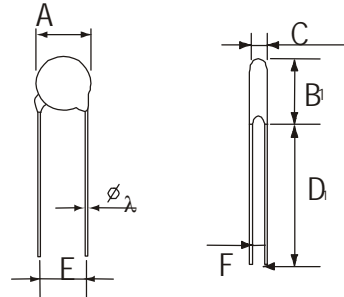

**STRAIGHT LEAD TYPE (-S)**  
Table of C max., F, and  $B_1$  max.

| Type No. | C max. | $F \pm 0.8$ | $B_1$ max. |
|----------|--------|-------------|------------|
| 180M     | 4.5    | 0.8         | 10.5       |
| 220L     | 4.5    | 0.9         | 10.5       |
| 270K     | 4.7    | 0.9         | 10.5       |
| 330K     | 4.7    | 1.0         | 10.5       |
| 390K     | 4.7    | 1.2         | 10.5       |
| 470K     | 5.0    | 1.2         | 10.5       |
| 560K     | 5.0    | 1.4         | 10.5       |
| 680K     | 5.5    | 1.7         | 10.5       |
| 820K     | 3.8    | 0.8         | 10.5       |
| 101K     | 3.9    | 0.8         | 10.5       |
| 121K     | 4.1    | 0.9         | 10.5       |
| 151K     | 4.5    | 1.2         | 10.5       |
| 181K     | 4.1    | 1.0         | 10.5       |
| 201K     | 4.2    | 1.0         | 10.5       |
| 221K     | 4.3    | 1.1         | 10.5       |
| 241K     | 4.4    | 1.1         | 10.5       |
| 271K     | 4.6    | 1.3         | 10.5       |
| 301K     | 4.8    | 1.3         | 10.5       |
| 331K     | 4.9    | 1.3         | 10.5       |
| 361K     | 5.1    | 1.8         | 10.5       |
| 391K     | 5.3    | 2.0         | 11.0       |
| 431K     | 6.1    | 2.1         | 11.0       |
| 471K     | 6.4    | 2.2         | 11.0       |
| 511K     | 6.6    | 2.5         | 11.5       |
| 561K     | 6.9    | 2.8         | 11.5       |
| 621K     | 7.2    | 3.1         | 11.5       |
| 681K     | 7.5    | 3.4         | 11.5       |
| 751K     | 7.9    | 3.7         | 11.5       |


**PACKAGING**

**ROV05, ROV05H**  
**5mm Series Metal Oxide Varistors**

www.circuitprotection.com

Document: SCD 25480  
Status: Released  
Rev. C May 18, 2005

in mm

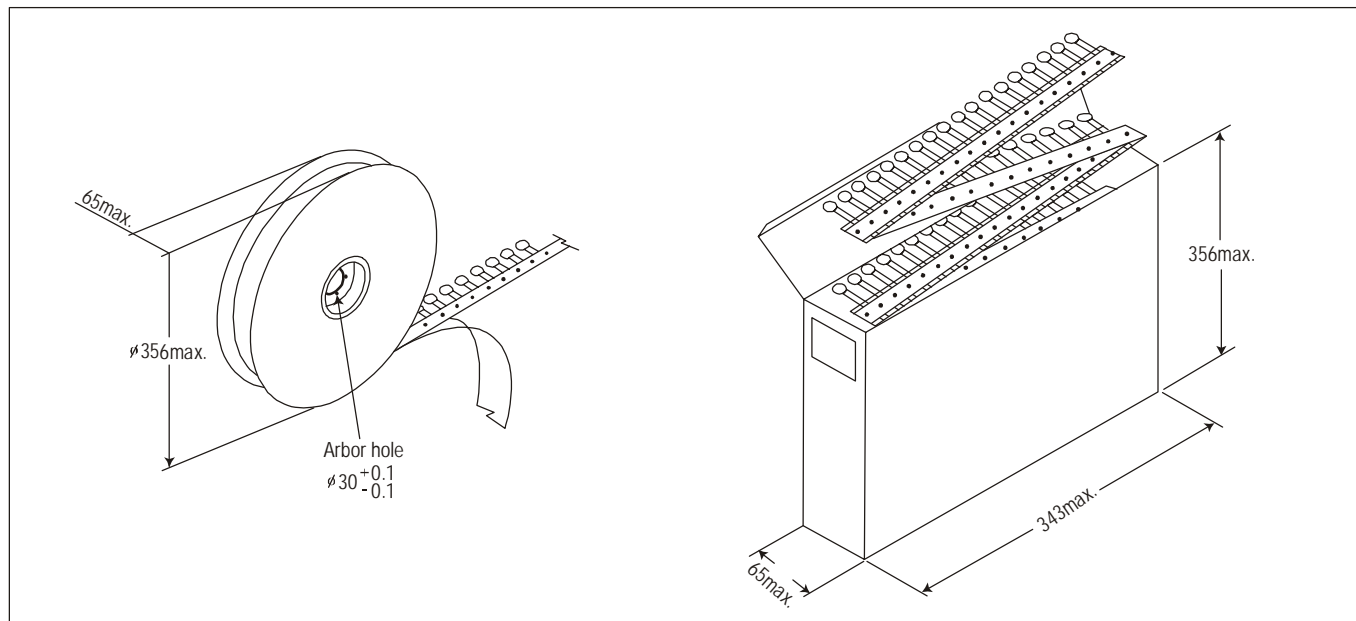

| Packaging        | Bulk (box)      | Reel               | Ammo            |
|------------------|-----------------|--------------------|-----------------|
| Box size (mm)    | 290 x 155 x 110 | 350 x 350 x 108    | 330 x 240 x 46  |
| Carton size (mm) | 310 x 328 x 250 | 371 x 371 x 590    | 350 x 500 x 270 |
| One carton with  | 4 Boxes         | 5 Boxes (10 reels) | 10 Boxes        |

| Part Number   | Bulk (box) | Reel | Ammo |
|---|------------|------|------|
| ROV05-180M to ROV05-470K,<br>ROV05H180M to ROV05H470K | 5000       | 1500 | 1500 |
| ROV05-560K to ROV05-680K,<br>ROV05H560K to ROV05H680K | 5000       | 1500 | 1000 |
| ROV05-820K to ROV05-331K,<br>ROV05H820K to ROV05H331K | 5000       | 1500 | 1500 |
| ROV05-361K to ROV05-391K,<br>ROV05H361K to ROV05H391K | 5000       | 1500 | 1000 |
| ROV05-431K to ROV05-471K,<br>ROV05H431K to ROV05H471K | 5000       | 1500 | 1000 |
| ROV05-511K to ROV05-751K,<br>ROV05H511K to ROV05H751K | 4000       | 1000 | 1000 |



**ROV05, ROV05H**  
5mm Series Metal Oxide Varistors

www.circuitprotection.com



Document: SCD 25480  
Status: Released  
Rev. C May 18, 2005

**TAPE AND REEL DIMENSIONS**

1/2" Pitch

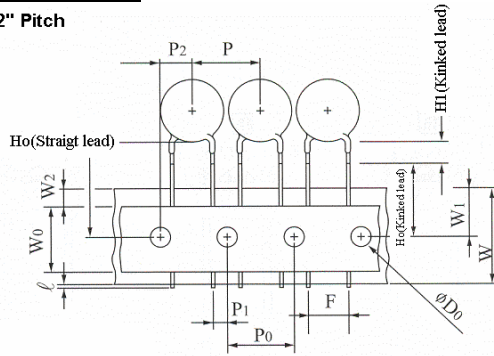

1.0" Pitch

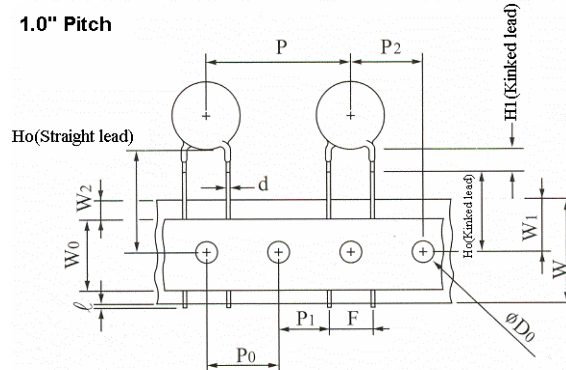

| Symbols               | Item                                   | Value  |
|-----------------------|--|--|
| $\lambda$             | Cut out length                         | 1.1mm max.   |
| $H_1$ (Kinked lead)   | Height of kink                         | 3.5mm max.   |
| $H_o$ (Kinked lead)   | Height to seating plane                | 16.0 $\pm$ 0.5mm   |
| $H_o$ (Straight lead) | Height of component from hole center   | 16.0-21.0mm  |
| $\Delta h$            | Front to back deviation                | 0.0 $\pm$ 2.0mm  |
| $W$                   | Carrier tape width                     | 18.0 $\begin{smallmatrix} +1.0 \\ -0.5 \end{smallmatrix}$ mm |
| $W_0$                 | Hold down tape width                   | 10.0mm   |
| $W_1$                 | Sprocket hole position                 | 9.0 $\begin{smallmatrix} +0.75 \\ -0.5 \end{smallmatrix}$ mm |
| $W_2$                 | Adhesive tape position                 | 3.0mm max.   |
| $F$                   | Component lead spacing                 | 5.0 $\begin{smallmatrix} +0.8 \\ -0.2 \end{smallmatrix}$ mm  |
| $P$                   | Pitch of component                     | 12.7 $\pm$ 1.0mm   |
| $P_0$                 | Sprocket hole pitch                    | 12.7 $\pm$ 0.3mm   |
| $P_1$                 | Lead length from hole center to lead   | 3.85 $\pm$ 0.7mm   |
| $P_2$                 | Length from hole center to disk center | 6.35 $\pm$ 1.3mm   |
| $D_0$                 | Sprocket hole diameter                 | 4.0 $\pm$ 0.2mm  |
| $d$                   | Lead wire diameter                     | 0.6 $\pm$ 0.05mm   |
| $T$                   | Disk thickness                         | See C. max table   |
| $t_1$                 | Total thickness tape                   | 0.7 $\pm$ 0.05mm   |
| $t_2$                 | Total thickness                        | 1.6mm max.   |

# ROV05, ROV05H

## 5mm Series Metal Oxide Varistors

---

[www.circuitprotection.com](http://www.circuitprotection.com)

Document: SCD 25480  
Status: Released  
Rev. C May 18, 2005

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of each product for their applications. Tyco Electronics Corporation assumes no responsibility for the use of its product or for any infringement of patents or other rights of third parties resulting from the use of its product. No license is granted by implication or otherwise under any patent or proprietary right of Tyco Electronics except the right to use such product for the purpose for which it is sold. Tyco Electronics reserves the right to change or update, without notice, any information contained in this publication; to change, without notice, the design, construction, processing, or specification of any product; and to discontinue or limit production or distribution of any product. This publication supersedes and replaces all information previously supplied. Without express written consent by an officer of Tyco Electronics, Tyco Electronics does not authorize the use of any its products as components in nuclear facility applications, aerospace, or in critical life support devices or systems. Tyco Electronics' only obligations are those in the Tyco Electronics Standard Terms and Conditions of Sale and in no case will Tyco Electronics be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products.

**Raychem** is a trademark of Tyco Electronics Corporation

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View ROV05-180M-S on WIN SOURCE](#)

 [Littelfuse Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management