





THE DATASHEET OF
132-00008


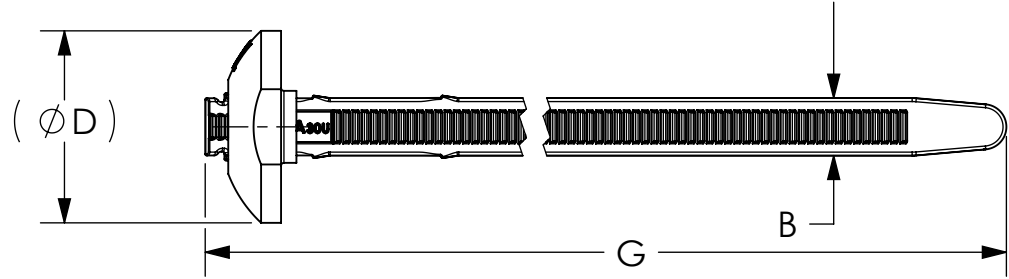


Revision level		Revision Record	Changed	Date	Approved	Date
Part	Drawing					
-	12	See ECN 010978	SJA	03/05/2008	JJP	11/20/2007



NOTES:

1. RECOMMENDED APPLICATION TOOL IS THE HT MARK 9 (MK9).
2. LOOPED BUNDLE LOAD APPLIED INLINE WITH MOUNTING HOLE AXIS.
3. FOR PROPER INSTALLATION FULLY SEAT STRAP WEDGE

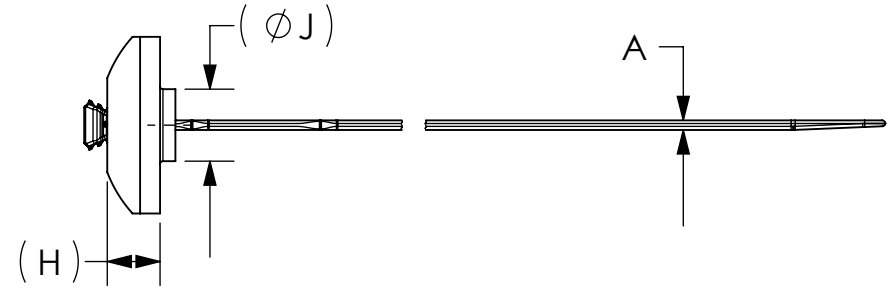

HEAD - PA 6/6 HS BLACK
STRAP - PA 6/6
IMHSUV BLACK

Bundle Dia. Range (mm)	A	B	D	G	H	J	Panel Hole Diameter (mm)	Min Loop Tensile Strength (Newtons) (2.)
6.4 to 73	1.3±0.2	7.6±0.25	25.4±0.6	267±8.0	7.0±0.5	9.5±0.5	10.0 to 20.83	578

Material

Dimension tolerances unless otherwise specified

.xxxx = ±.013
.xxx = ±.13
.xx = ±.3
.x = ±.8
∠ = ±0.5°

Dimension Units millimeters

PERFORMANCE SPECIFICATION

SW 2007

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER SHOWN ON THIS DRAWING ARE EXCLUSIVE PROPERTY OF HELLERMANNNTYTON

Drawn PLN 10/15/2004
Approved GGG 02/10/2006

HellermannTyton®
Cable Management Products

7930 N. Faulkner Rd.
Milwaukee, WI 53224
Ph: (414) 355-1130
Fx: (414) 362-8338

Scale 1:1 Computer File Number CT05-047-005CST_12

Title **BT130RDP
BUTTON HEAD TIE**

Drawing-No **CT05-047-005CST** Format **AH**

Sheet 1 of 1

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 132-00008](#) on WIN SOURCE

 [HellermannTyton](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management