



SJ111875  
(ON DRAWING) (台番号)

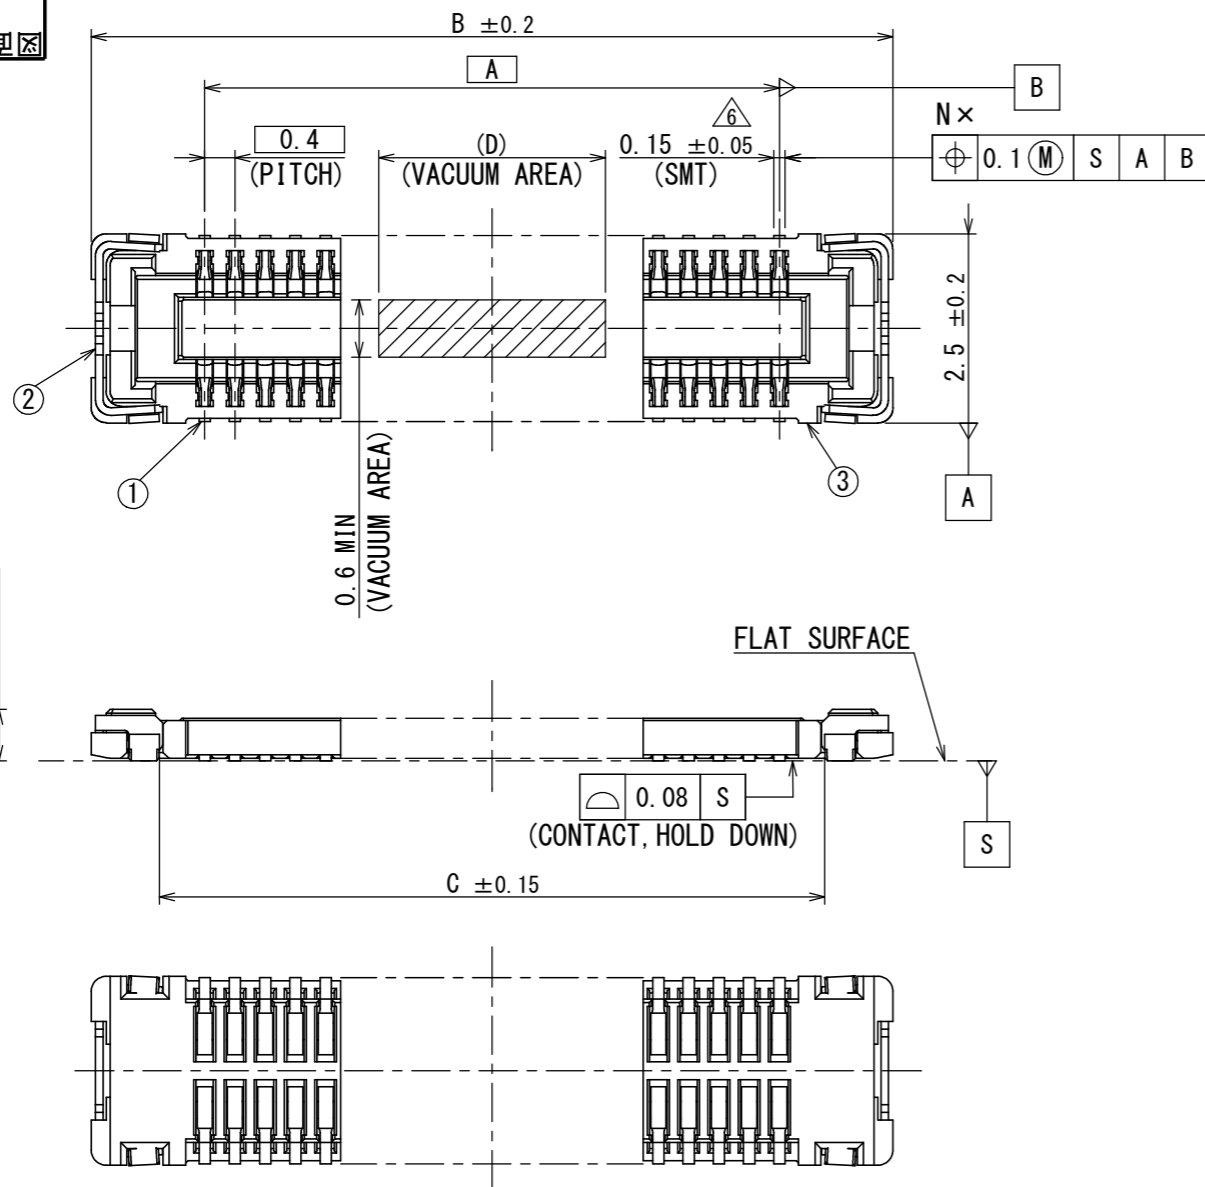


| 版数<br>VER. | 年月日<br>DATE | CN NO. | 変更内容<br>DESCRIPTION | 製図<br>DR. | 担当<br>CHK.   | 査閲<br>APPD.  | 承認<br>APPD. |
|------------|-------------|--------|---------------------|-----------|--------------|--------------|-------------|
| 2          | 28/FEB/2012 | 001773 | ADDED ITEM.         | —         | T. KOBUCHI   | T. NISHIMURA | H. OBIKANE  |
| 3          | 02/NOV/2012 | 004406 | ADDED ITEM.         | —         | H. MATSUZAKI | T. NISHIMURA | H. OBIKANE  |
| 4          | 28/FEB/2013 | 005530 | ADDED ITEM.         | —         | H. MATSUZAKI | T. NISHIMURA | H. OBIKANE  |
| 5          | 29/MAR/2013 | 005869 | ADDED ITEM.         | —         | H. MATSUZAKI | T. NISHIMURA | H. OBIKANE  |
| 6          | 03/APR/2013 | 005908 | CORRECT AN ERROR    | —         | H. MATSUZAKI | T. NISHIMURA | H. OBIKANE  |

TABLE 1

| NUMBER OF CONTACT<br>芯数 | DIMENSIONS<br>寸法 |     |     |     |
|-------------------------|------------------|-----|-----|-----|
|                         | A                | B   | C   | D   |
| 10                      | 1.6              | 4.6 | 2.8 | 2.0 |
| 16                      | 2.8              | 5.8 | 4.0 | 2.0 |
| 20                      | 3.6              | 6.6 | 4.8 | 2.0 |
| 22                      | 4.0              | 7.0 | 5.2 | 2.0 |
| 24                      | 4.4              | 7.4 | 5.6 | 2.0 |
| 26                      | 4.8              | 7.8 | 6.0 | 5.0 |
| 28                      | 5.2              | 8.2 | 6.4 | 5.0 |
| 30                      | 5.6              | 8.6 | 6.8 | 5.0 |
| 32                      | 6.0              | 9.0 | 7.2 | 5.0 |

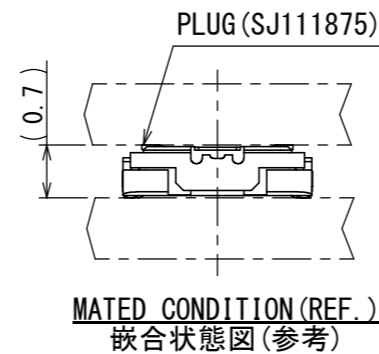


NOTE 1. IT SHOULD BE 3.5 ± 0.05 IF REPAIRING IS NEEDED.  
注 1. リペアーが必要な場合、この寸法は3.5 ± 0.05を推奨する。

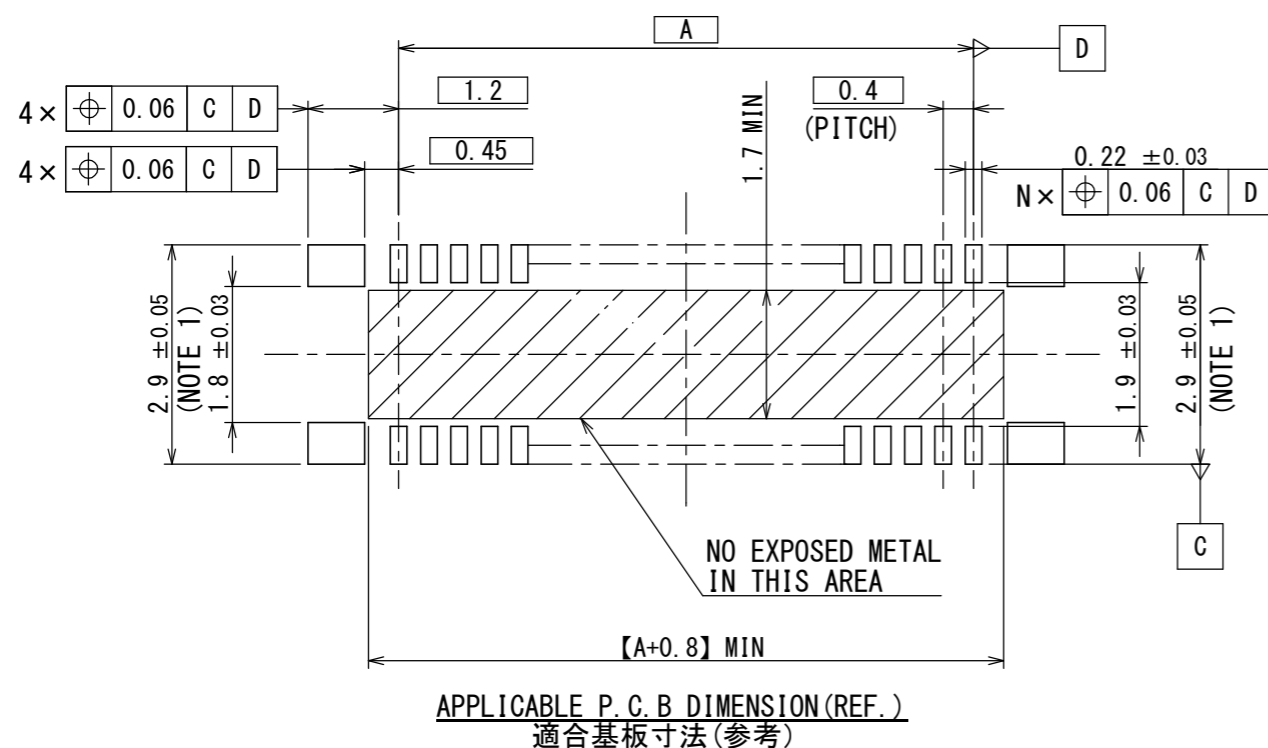

| 符号<br>NO. | 名称<br>DESCRIPTION    | 個数<br>QTY. | 材料<br>MATERIAL                      | 仕上<br>FINISH                         | 備考<br>REMARKS  |
|-----------|----------------------|------------|-------------------------------------|--------------------------------------|--|
| 3         | INSULATOR<br>インシュレータ | 1          | HEAT RESISTING PLASTICS<br>耐熱プラスチック | —                                    | —  |
| 2         | HOLD DOWN<br>ホールドダウン | 2          | COPPER ALLOY<br>銅合金                 | TIN PLATING<br>Snめっき                 | —  |
| 1         | CONTACT<br>コンタクト     | N          | COPPER ALLOY<br>銅合金                 | GOLD PLATING OVER NICKEL<br>Ni上Auめっき | CONTACT AREA : GOLD (0.1 μm MIN)<br>TERMINAL AREA : GOLD (0.05 μm MIN) |

|                                   |                                    |                            |                       |  |
|-----------------------------------|------------------------------------|----------------------------|-----------------------|--|
| 仕様書 (SPECIFICATION)<br>JACS-10814 | 第1版 (ORIGINAL DATE)<br>16/JUN/2011 | 尺度 (SCALE)<br>10:1         | シリーズ (SERIES)<br>WP7A | 日本航空電子工業株式会社   |
| 一般公差 (GENERAL TOLERANCE)          | 製図<br>DR.                          | 名称 (TITLE)<br>WP7A-S***VA1 |                       | JAE<br>JAPAN AVIATION<br>ELECTRONICS<br>INDUSTRY, LTD. |
| 寸法 (DIMENSION)                    | 担当<br>CHK.<br>H. MATSUZAKI         | 質量 (MASS)                  |                       |  |
| 角度 (ANGLES)                       | 査閲<br>APPD.<br>T. NISHIMURA        | 承認<br>APPD.<br>H. OBIKANE  |                       | 図面番号 (DRAWING NO.)<br>SJ111877                         |
| 単位 (UNIT) : mm                    | 承認<br>APPD.<br>H. OBIKANE          |                            |                       | 版数 (VER.)<br>6   |

DCF-C-212H(12.08)



WISDOM承認 2013/04/03

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

[View WP7A-S030VA1-R500 on WIN SOURCE](#)

[JAE Electronics Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management