



Film Capacitors

EMI Suppression Capacitors (MKP)

Series/Type: B32921 ... B32926
Date: May 2005

© EPCOS AG 2005. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

Typical applications

- X2 class for interference suppression
- "Across the line" applications

Climatic

- Max. operating temperature: 125 °C
- Climatic category (IEC 60068-1): 40/105/56

Construction

- Dielectric: polypropylene (MKP)
- Plastic case (UL 94 V-0)
- Epoxy resin sealing (UL 94 V-0)

Features

- Very small dimensions
- Self-healing properties

Terminals

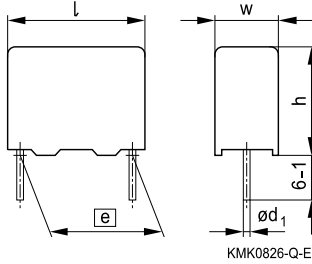
- Parallel wire leads, lead-free tinned
- Standard lead lengths: 6 – 1 mm
- Special lead lengths available on request

Marking

Manufacturer's logo, lot number, date code, rated capacitance (coded), cap. tolerance (code letter), rated AC voltage, series number, sub-class (X2), dielectric code (MKP), climatic category, passive flammability category, approvals.




Delivery mode





Bulk (untaped)
 Taped (Ammo pack or reel)
 For taping details, refer to chapter "Taping and packing".


Dimensional drawing


Dimensions in mm

| Lead spacing e ±0.4 | Lead diameter d_1 | Type |
|--------------------------|------------------------|--------|
| 10 | 0.6 | B32921 |
| 15 | 0.8 | B32922 |
| 22.5 | 0.8 | B32923 |
| 27.5 | 0.8 | B32924 |
| 37.5 | 1.0 | B32926 |


Marking examples
 $e = 10$ mm

 $e \geq 15$ mm/ $C_R \leq 1$ μF

 $e = 22.5, 27.5, 37.5$ mm/ $C_R > 1$ μF

Approvals

| Marks of conformity | Standards | Certificate |
|---|-------------------------|-----------------------------------|
|  | EN 132400, IEC 60384-14 | 40005536/40010694 |
|  | UL 1414 / UL 1283 | E97863 / E157153 |
|  | CSA C22.2 No. 1 / No. 8 | E97863 / E157153 (approved by UL) |
|  | CQC (GB/T 14472-1998) | CQC001007-14859 |



Overview of available types

| Lead spacing | 10 mm | 15 mm | 22.5 mm | 27.5 mm | 37.5 mm |
|-------------------------|--------|--------|---------|---------|---------|
| Type | B32921 | B32922 | B32923 | B32924 | B32926 |
| C_R (μF) | | | | | |
| 0.010 | | | | | |
| 0.022 | | | | | |
| 0.033 | | | | | |
| 0.047 | | | | | |
| 0.068 | | | | | |
| 0.10 | | | | | |
| 0.15 | | | | | |
| 0.22 | | | | | |
| 0.33 | | | | | |
| 0.47 | | | | | |
| 0.56 | | | | | |
| 0.68 | | | | | |
| 0.82 | | | | | |
| 1.0 | | | | | |
| 1.5 | | | | | |
| 2.2 | | | | | |
| 3.3 | | | | | |
| 4.7 | | | | | |
| 5.6 | | | | | |
| 6.8 | | | | | |
| 8.2 | | | | | |
| 10 | | | | | |



B32921 ... B32926

X2 / 305 VAC

Ordering codes and packing units

| Lead spacing mm | C _R μF | Max. dimensions w × h × l mm | Ordering code (composition see below) | Ammo pack pcs./unit | Reel pcs./unit | Untaped pcs./unit |
|--------------------|----------------------|------------------------------------|---|---------------------------|-------------------|----------------------|
| 10 | 0.010 | 4.0 × 9.0 × 13.0 | B32921C3103+*** | 1000 | 1700 | 1000 |
| | 0.022 | 4.0 × 9.0 × 13.0 | B32921C3223+*** | 1000 | 1700 | 1000 |
| | 0.033 | 4.0 × 9.0 × 13.0 | B32921C3333+*** | 1000 | 1700 | 1000 |
| | 0.047 | 5.0 × 11.0 × 13.0 | B32921C3473+*** | 830 | 1300 | 1000 |
| | 0.047 | 6.0 × 12.0 × 13.0 | B32921A2473+*** | 680 | 1100 | 1000 |
| | 0.068 | 6.0 × 12.0 × 13.0 | B32921A2683M*** | 680 | 1100 | 1000 |
| | 0.068 | 6.0 × 12.0 × 13.0 | B32921C3683+*** | 680 | 1100 | 1000 |
| | 0.10 | 6.0 × 12.0 × 13.0 | B32921A2104M*** | 680 | 1100 | 1000 |
| | 0.10 | 6.0 × 12.0 × 13.0 | B32921C3104M*** | 680 | 1100 | 1000 |
| 15 | 0.033 | 5.0 × 10.5 × 18.0 | B32922C3333+*** | 1170 | 1300 | 1000 |
| | 0.047 | 5.0 × 10.5 × 18.0 | B32922C3473+*** | 1170 | 1300 | 1000 |
| | 0.068 | 6.0 × 11.0 × 18.0 | B32922A2683+*** | 960 | 1100 | 1000 |
| | 0.068 | 5.0 × 10.5 × 18.0 | B32922C3683+*** | 1170 | 1300 | 1000 |
| | 0.10 | 6.0 × 11.0 × 18.0 | B32922A2104+*** | 960 | 1100 | 1000 |
| | 0.10 | 5.0 × 10.5 × 18.0 | B32922C3104+*** | 1170 | 1300 | 1000 |
| | 0.15 | 7.0 × 12.5 × 18.0 | B32922A2154+*** | 830 | 900 | 1000 |
| | 0.15 | 6.0 × 12.0 × 18.0 | B32922C3154+*** | 960 | 1100 | 1000 |
| | 0.22 | 8.5 × 14.5 × 18.0 | B32922A2224+*** | 680 | 700 | 500 |
| | 0.22 | 8.0 × 14.0 × 18.0 | B32922T2224+*** | 730 | 750 | 500 |
| | 0.22 | 7.0 × 12.5 × 18.0 | B32922C3224+*** | 830 | 900 | 1000 |
| | 0.22 | 8.0 × 14.0 × 18.0 | B32922T3224+*** | 730 | 750 | 500 |
| | 0.33 | 9.0 × 17.5 × 18.0 | B32922A2334+*** | 640 | 700 | 500 |
| | 0.33 | 13.0 × 14.0 × 18.0 | B32922T2334+*** | – | 500 | 300 |
| | 0.33 | 8.0 × 14.0 × 18.0 | B32922C3334M*** | 730 | 750 | 500 |
| | 0.33 | 8.5 × 14.5 × 18.0 | B32922D3334+*** | 680 | 700 | 500 |
| | 0.33 | 13.0 × 14.0 × 18.0 | B32922T3334+*** | – | 500 | 300 |
| | 0.47 | 9.0 × 17.5 × 18.0 | B32922C3474+*** | 640 | 700 | 500 |
| | 0.56 | 11.0 × 18.5 × 18.0 | B32922C3564+*** | – | 550 | 250 |
| 0.68 | 11.0 × 18.5 × 18.0 | B32922C3684M*** | – | 550 | 250 | |

Composition of ordering code

+ = Capacitance tolerance code:

M = ±20%

K = ±10%

*** = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (lead length 6 – 1 mm)

(Closer tolerances on request)

Ordering codes and packing units

| Lead spacing | C _R | Max. dimensions w × h × l | Ordering code (composition see below) | Ammo pack | Reel | Untaped |
|--------------|--------------------|------------------------------|---|--------------|-----------|-----------|
| mm | μF | mm | | pcs./unit | pcs./unit | pcs./unit |
| 22.5 | 0.33 | 8.5 × 16.5 × 26.5 | B32923A2334+*** | 480 | 500 | 510 |
| | 0.33 | 6.0 × 15.0 × 26.5 | B32923C3334M*** | 680 | 700 | 720 |
| | 0.33 | 7.0 × 16.0 × 26.5 | B32923D3334+*** | 580 | 600 | 630 |
| | 0.33 | 7.5 × 14.0 × 26.5 | B32923T3334+*** | 550 | 500 | 570 |
| | 0.47 | 8.5 × 16.5 × 26.5 | B32923A2474M*** | 480 | 500 | 510 |
| | 0.47 | 10.5 × 16.5 × 26.5 | B32923B2474+*** | 390 | 400 | 540 |
| | 0.47 | 8.5 × 16.5 × 26.5 | B32923C3474+*** | 480 | 500 | 510 |
| | 0.56 | 8.5 × 16.5 × 26.5 | B32923C3564M*** | 480 | 500 | 510 |
| | 0.68 | 10.5 × 18.5 × 26.5 | B32923A2684M*** | 390 | 400 | 540 |
| | 0.68 | 10.5 × 20.5 × 26.5 | B32923B2684+*** | 390 | 400 | 540 |
| | 0.68 | 10.5 × 16.5 × 26.5 | B32923C3684+*** | 390 | 400 | 540 |
| | 0.82 | 10.5 × 18.5 × 26.5 | B32923C3824M*** | 390 | 400 | 540 |
| | 1.0 | 12.0 × 22.0 × 26.5 | B32923A2105M*** | – | – | 450 |
| | 1.0 | 11.0 × 20.5 × 26.5 | B32923C3105+*** | 370 | 350 | 510 |
| | 1.5 | 12.0 × 22.0 × 26.5 | B32923C3155M*** | – | – | 450 |
| | 1.5 | 14.5 × 29.5 × 26.5 | B32923D3155+*** | – | – | 260 |
| 2.2 | 14.5 × 29.5 × 26.5 | B32923C3225+*** | – | – | 260 | |

Composition of ordering code

+ = Capacitance tolerance code:

M = ±20%

K = ±10%


*** = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (lead length 6 –1 mm)

(Closer tolerances on request)



B32921 ... B32926

X2 / 305 VAC

Ordering codes and packing units

| Lead spacing mm | C _R µF | Max. dimensions w × h × l mm | Ordering code (composition see below) | Ammo pack pcs./unit | Reel pcs./unit | Untaped pcs./unit |
|--------------------|----------------------|------------------------------------|---|---------------------------|-------------------|----------------------|
| 27.5 | 0.68 | 11.0 × 19.0 × 31.5 | B32924C3684+*** | – | 350 | 320 |
| | 0.82 | 11.0 × 19.0 × 31.5 | B32924C3824+*** | – | 350 | 320 |
| | 1.0 | 11.0 × 21.0 × 31.5 | B32924A2105+*** | – | 350 | 320 |
| | 1.0 | 11.0 × 19.0 × 31.5 | B32924C3105+*** | – | 350 | 320 |
| | 1.5 | 13.5 × 23.0 × 31.5 | B32924A2155M*** | – | 250 | 260 |
| | 1.5 | 14.0 × 24.5 × 31.5 | B32924B2155+*** | – | – | 260 |
| | 1.5 | 12.5 × 21.5 × 31.5 | B32924C3155+*** | – | 300 | 280 |
| | 2.2 | 18.0 × 27.5 × 31.5 | B32924A2225+*** | – | – | 200 |
| | 2.2 | 14.0 × 24.5 × 31.5 | B32924C3225+*** | – | – | 260 |
| | 3.3 | 21.0 × 31.0 × 31.5 | B32924A2335M*** | – | – | 180 |
| | 3.3 | 18.0 × 27.5 × 31.5 | B32924C3335M*** | – | – | 200 |
| | 3.3 | 16.0 × 32.0 × 31.5 | B32924D3335+*** | – | – | 220 |
| | 4.7 | 22.0 × 36.5 × 31.5 | B32924A2475M*** | – | – | 160 |
| | 4.7 | 18.0 × 33.0 × 31.5 | B32924C3475M*** | – | – | 200 |
| | 4.7 | 21.0 × 31.0 × 31.5 | B32924D3475M*** | – | – | 180 |
| 5.6 | 22.0 × 36.5 × 31.5 | B32924C3565+*** | – | – | 160 | |
| 37.5 | 2.2 | 14.0 × 25.0 × 41.5 | B32926C3225+*** | – | – | 115 |
| | 3.3 | 18.0 × 32.5 × 41.5 | B32926A2335+*** | – | – | 90 |
| | 3.3 | 16.0 × 28.5 × 41.5 | B32926C3335+*** | – | – | 100 |
| | 4.7 | 20.0 × 39.5 × 41.5 | B32926A2475M*** | – | – | 75 |
| | 4.7 | 18.0 × 32.5 × 41.5 | B32926C3475+*** | – | – | 90 |
| | 5.6 | 20.0 × 39.5 × 41.5 | B32926A2565M*** | – | – | 75 |
| | 5.6 | 18.0 × 32.5 × 41.5 | B32926C3565+*** | – | – | 90 |
| | 6.8 | 28.0 × 42.5 × 41.5 | B32926A2685M*** | – | – | 55 |
| | 6.8 | 20.0 × 39.5 × 41.5 | B32926C3685+*** | – | – | 75 |
| | 8.2 | 28.0 × 42.5 × 41.5 | B32926A2825M*** | – | – | 55 |
| | 8.2 | 20.0 × 39.5 × 41.5 | B32926C3825+*** | – | – | 55 |
| | 10.0 | 28.0 × 42.5 × 41.5 | B32926C3106+*** | – | – | 55 |

Composition of ordering code

+ = Capacitance tolerance code:

M = ±20%

K = ±10%

*** = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (lead length 6 – 1 mm)


(Closer tolerances on request)

Technical data

Standard version (A/B/T): B3292*A... / B3292*B... / B3292*T...

Miniaturized version (C/D): B3292*C... / B3292*D...

| | | | | |
|--|---|---|----------------------------------|-------------------|
| Max. operating temperature $T_{op,max}$ | +125 °C (for $C_R \leq 1 \mu F$ with A/B/T version) +110 °C (for $C_R > 1 \mu F$ or C/D version) | | | |
| Dissipation factor $\tan \delta$ (in 10^{-3}) at 20 °C (upper limit values) | | $C_R \leq 0.1 \mu F$ | $0.1 \mu F < C_R \leq 2.2 \mu F$ | $C_R > 2.2 \mu F$ |
| | at 1 kHz | 1.0 | 1.0 | 2.0 |
| | at 100 kHz | 5.0 | — | — |
| Insulation resistance R_{ins} or time constant $\tau = C_R \cdot R_{ins}$ at 20 °C, rel. humidity $\leq 65\%$ (minimum as-delivered values) | $C_R \leq 0.33 \mu F$ | $C_R > 0.33 \mu F$ | | |
| | 100 000 M Ω | 30 000 s | | |
| DC test voltage | 2121 V, 2 s | | | |
| Passive flammability category to IEC 40 (CO) 752 | B | | | |
| Maximum continuous AC voltage V_{AC} | 310 V (50/60 Hz) | | | |
| Rated AC voltage (IEC 60384-14) | 305 V (50/60 Hz) | | | |
| Maximum continuous DC voltage V_{DC} | 760 V (630 V for C/D version) | | | |
| Operating AC voltage V_{op} at high temperature | $T_A \leq 110 \text{ °C}$ | $V_{op} = V_{AC}$ (continuously) | | |
| | $T_A \leq 110 \text{ °C}$ | $V_{op} = 1.25 \cdot V_{AC}$ (1000 h) | | |
| | $110 \text{ °C} < T_A \leq 125 \text{ °C}$ | $V_{op} = V_{AC}$ (1000 h) (only for A/B/T version) | | |
| Damp heat test | 56 days / 40 °C / 93% relative humidity | | | |
| Limit values after damp heat test | Capacitance change $ \Delta C/C \leq 5\%$ Dissipation factor change $\Delta \tan \delta \leq 0.5 \cdot 10^{-3}$ (at 1 kHz) Insulation resistance $R_{ins} \leq 1.0 \cdot 10^{-3}$ (at 10 kHz) or time constant $\tau = C_R \cdot R_{ins} \geq 50\%$ of minimum as-delivered values | | | |



B32921 ... B32926

X2 / 305 VAC

Pulse handling capability

"dV/dt" represents the maximum permissible voltage change per unit of time for non-sinusoidal voltages, expressed in V/ μ s.

"k₀" represents the maximum permissible pulse characteristic of the waveform applied to the capacitor, expressed in V²/ μ s.

Note:


The values of dV/dt and k₀ provided below must not be exceeded in order to avoid damaging the capacitor.

dV/dt and k₀ values

| Lead spacing | 10 mm | | 15 mm | | 22.5 mm | | 27.5 mm | | 37.5 mm | |
|--|--------|--------|--------|--------|---------|--------|---------|--------|---------|-------|
| | A/B/T | C/D | A/B/T | C/D | A/B/T | C/D | A/B/T | C/D | A/B/T | C/D |
| dV/dt in V/ μ s | 550 | 475 | 400 | 340 | 200 | 170 | 150 | 120 | 100 | 80 |
| k ₀ in V ² / μ s | 473000 | 408500 | 344000 | 292400 | 172000 | 146200 | 129000 | 103200 | 86000 | 68800 |



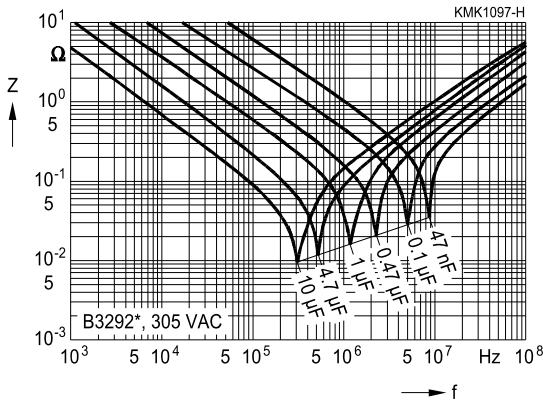Impedance Z versus frequency f

(typical values)









Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View B32926A2335M on WIN SOURCE](#)
-  [EPCOS \(TDK\) Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management