



RF Filters for Cellular Phones

Series/Type: **B7752**

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39212B7752C910	B39212B9408K610	2007-09-21	2007-12-31	2008-03-31


For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.


Chip Sized SAW Package DCS6K
Features

- Low-loss RF filter for mobile telephone W-CDMA system, receive path
- Low amplitude ripple
- Usable passband 60 MHz
- Unbalanced to balanced operation
- Impedance transformation from 50Ω to 200Ω
- Package for **Surface Mounted Technology (SMT)**
- Chip Sized SAW Package (CSSP)

Terminals


- Gold-plated Ni

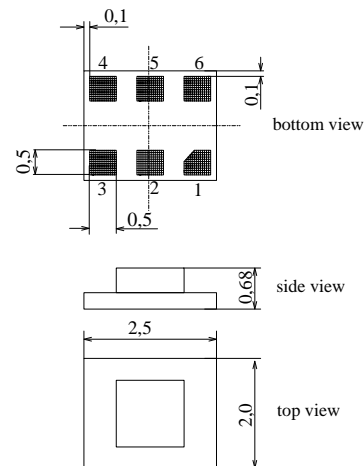

Dimensions in mm, approx. weight 0,012 g

Pin configuration

- 2 Input, unbalanced
- 4, 6 Output, balanced
- 1, 3, 5 To be grounded

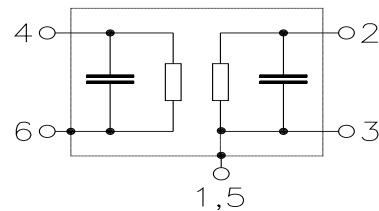

Type	Ordering code	Marking and Package according to	Packing according to
B7752	B39212-B7752-C910	C61157-A7-A97	F61074-V8153-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operating temperature range	T	- 20/+ 85	°C	
Storage temperature range	T_{stg}	- 40/+ 85	°C	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{ESD}	50	V	
Source power	P_S	10	dBm	

Data Sheet

Characteristics

Operating temperature range: $T = +25^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 200\ \Omega$ (balanced) || 12 nH

		min.	typ.	max.	
Center frequency	f_C	—	2140,0	—	MHz
Maximum insertion attenuation	α_{\max}	—	2,4	2,8	dB
2110,0 ... 2170,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,8	1,2	dB
2110,0 ... 2170,0 MHz					
Amplitude ripple per 5MHz channel (p-p)	$\Delta\alpha_{5\text{MHz}}$	—	0,3	0,5	dB
2110,0 ... 2170,0 MHz					
Input VSWR		—	1,9	2,2	
2110,0 ... 2170,0 MHz					
Output VSWR		—	1,9	2,2	
2110,0 ... 2170,0 MHz					
Output amplitude balance (S_{31}/S_{21})		-1,0	0	1,0	dB
2110,0 ... 2170,0 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)		-10,0	0	10,0	degree
2110,0 ... 2170,0 MHz					
Attenuation	α				
180,0 ... 200,0 MHz		60	80	—	dB
200,0 ... 1000,0 MHz		50	58	—	dB
1000,0 ... 1880,0 MHz		35	40	—	dB
1880,0 ... 1980,0 MHz		30	36	—	dB
1980,0 ... 2050,0 MHz		24	28	—	dB
2205,0 ... 2255,0 MHz		15	22	—	dB
2255,0 ... 2300,0 MHz		20	27	—	dB
2300,0 ... 2490,0 MHz		27	34	—	dB
2490,0 ... 2550,0 MHz		35	40	—	dB
2550,0 ... 3200,0 MHz		35	39	—	dB
3200,0 ... 6000,0 MHz		40	54	—	dB



Characteristics

Operating temperature range:	$T = -20$ to $+85$ °C
Terminating source impedance:	$Z_S = 50$ Ω
Terminating load impedance:	$Z_L = 200$ Ω (balanced) 12 nH


		min.	typ.	max.	
Center frequency	f_C	—	2140,0	—	MHz
Maximum insertion attenuation	α_{max}	—	2,8	3,2	dB
2110,0 ... 2170,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	1,2	1,5	dB
2110,0 ... 2170,0 MHz					
Amplitude ripple per 5MHz channel (p-p)	$\Delta\alpha_{5MHz}$	—	0,3	0,5	dB
2110,0 ... 2170,0 MHz					
Input VSWR		—	2,0	2,2	
2110,0 ... 2170,0 MHz					
Output VSWR		—	2,0	2,2	
2110,0 ... 2170,0 MHz					
Output amplitude balance (S_{31}/S_{21})		-1,0	0	1,5	dB
2110,0 ... 2170,0 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)		-10,0	0	15,0	degree
2110,0 ... 2170,0 MHz					
Attenuation	α				
180,0 ... 200,0 MHz		60	80	—	dB
200,0 ... 1000,0 MHz		50	58	—	dB
1000,0 ... 1880,0 MHz		35	40	—	dB
1880,0 ... 1980,0 MHz		30	36	—	dB
1980,0 ... 2050,0 MHz		24	28	—	dB
2205,0 ... 2255,0 MHz		15	21	—	dB
2255,0 ... 2300,0 MHz		20	27	—	dB
2300,0 ... 2490,0 MHz		27	34	—	dB
2490,0 ... 2550,0 MHz		35	40	—	dB
2550,0 ... 3200,0 MHz		35	39	—	dB
3200,0 ... 6000,0 MHz		40	54	—	dB



Transfer function:

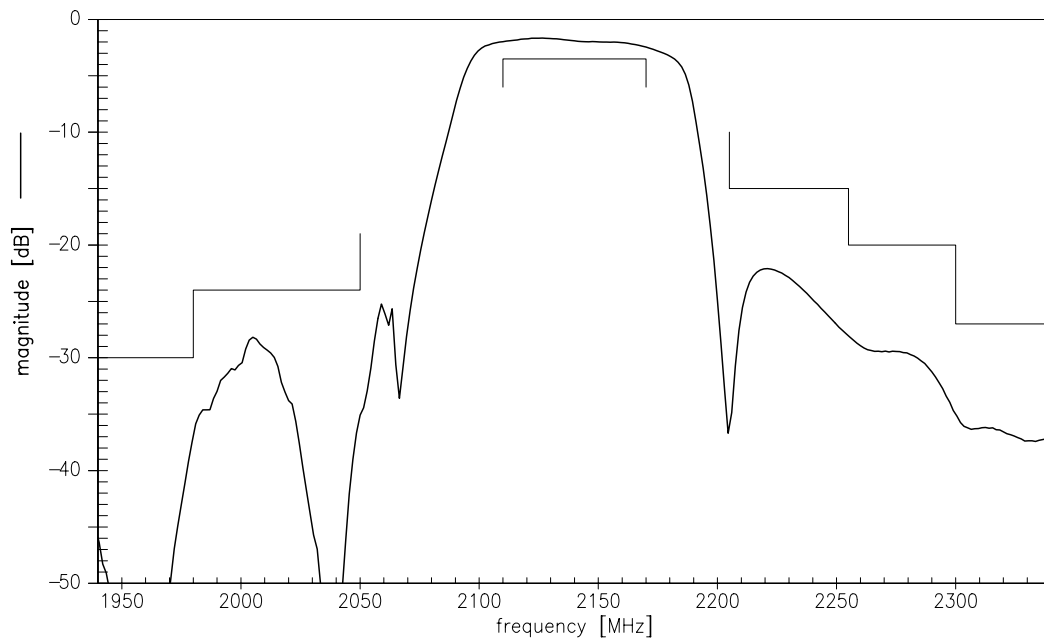


Transfer function (wide band) :

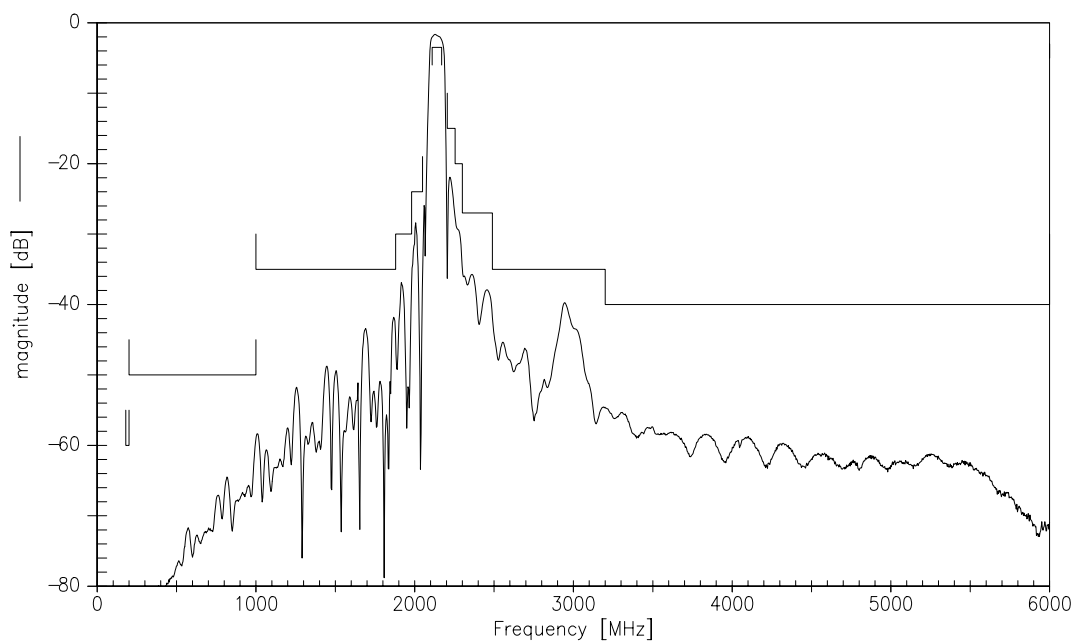




Output amplitude balance($|S_{31}/S_{21}|$):

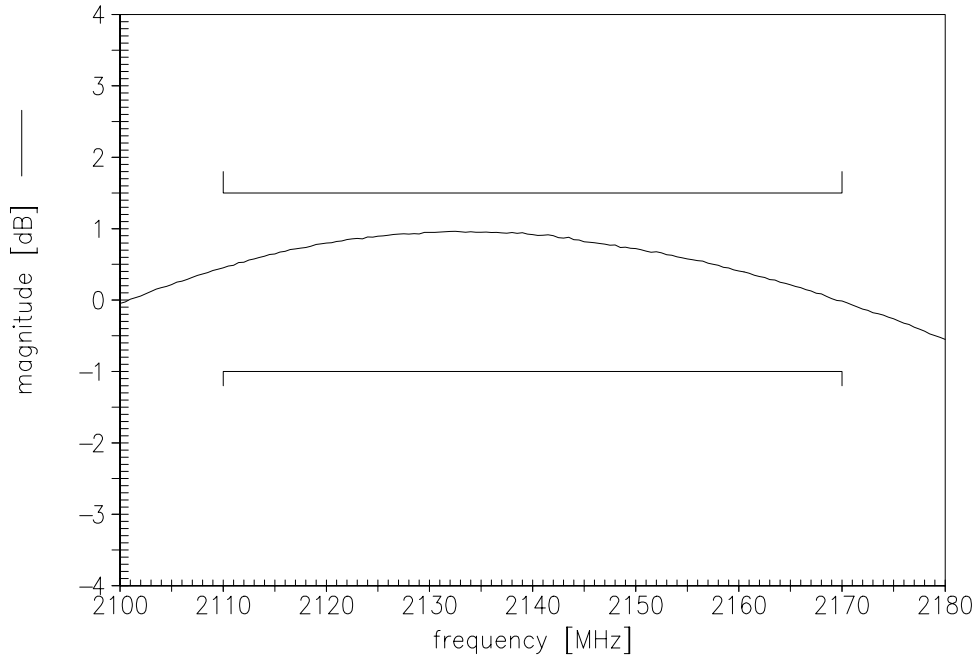

Output phase balance($\phi(S_{31})-\phi(S_{21})+180^\circ$):

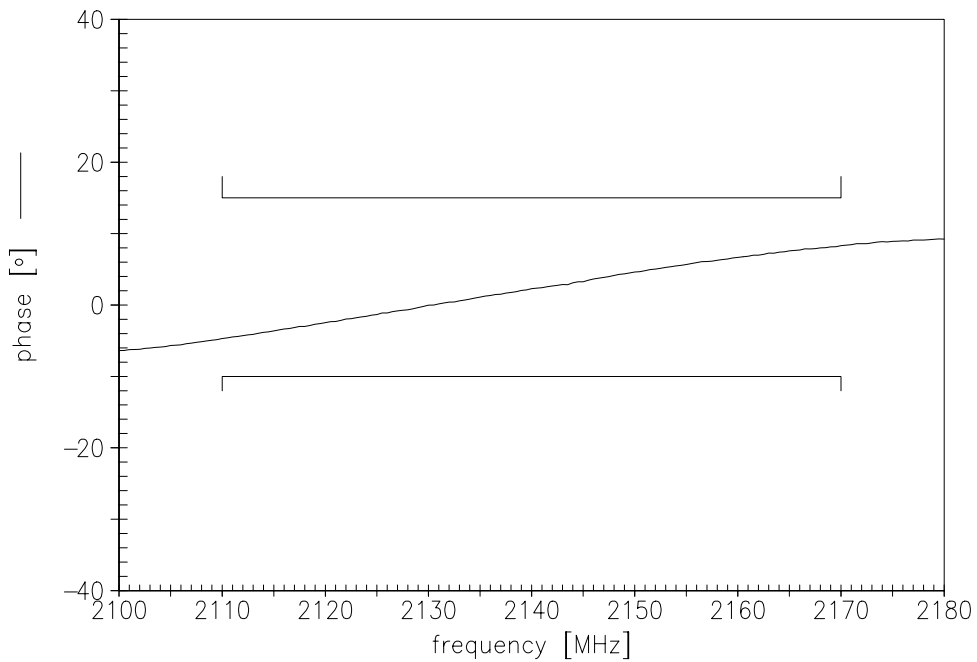



Published by EPCOS AG
Surface Acoustic Wave Components Division, SAW MC WT
P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2003. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.



This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View B39212-B7752-C910 on WIN SOURCE](#)
-  [EPCOS \(TDK\) Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management