



**THE DATASHEET OF  
B39389-L9653-M100**





# SAW Components

Data Sheet L 9653 M





**SAW Components**

**L 9653 M**

**IF Filter for Audio Applications**

**33,90 MHz and 38,90 MHz**

**Data Sheet**

**Standard**

Plastic package **SIP5K**


- L/L'

**Features**

- TV IF audio filter with two channels
- Channel 1 (L') with pass band for sound carrier at 40,40 MHz
- Channel 2 (L) with pass band for sound carrier at 32,40 MHz

**Terminals**


- Tinned CuFe alloy

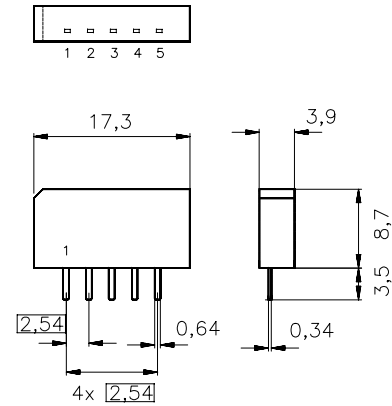

Dimensions in mm, approx. weight 1,0 g

**Pin configuration**

- 1 Input
- 2 Switching Input
- 3 Chip carrier - ground
- 4 Output
- 5 Output



Type	Ordering code	Marking and package according to	Packing according to
L 9653 M	B39389-L9653-M100	C61157-A1-A15	F61074-V8067-Z000

**Maximum ratings**

Operating temperature range	$T_A$	- 25/+ 65	°C	
Storage temperature range	$T_{stg}$	- 40/+ 85	°C	
DC voltage	$V_{DC}$	5	V	between any terminals
AC voltage	$V_{pp}$	10	V	between any terminals



Data Sheet

Characteristics of channel 1 (switching pin 2 connected to ground)

Reference temperature:  $T_A = 25\text{ °C}$   
 Terminating source impedance:  $Z_S = 50\ \Omega$   
 Terminating load impedance:  $Z_L = 2\text{ k}\Omega \parallel 3\text{ pF}$

		min.	typ.	max.	
<b>Insertion attenuation</b>					
	$\alpha$				
Reference level for the following data	40,40 MHz	12,5	14,0	15,5	dB
<b>Relative attenuation</b>					
	$\alpha_{rel}$				
Picture carrier	33,90 MHz	42,0	52,0	—	dB
	38,40 MHz	40,0	45,0	—	dB
Adjacent picture carrier	41,90 MHz	34,0	38,0	—	dB
Adjacent sound carrier	32,40 MHz	39,0	55,0	—	dB
Lower sidelobe	25,00 ... 33,90 MHz	35,0	41,0	—	dB
Upper sidelobe	41,90 ... 45,00 MHz	32,0	37,0	—	dB
<b>Impedance at 40,40 MHz</b>					
Input:	$Z_{IN} = R_{IN} \parallel C_{IN}$	—	0,4    12,2	—	k $\Omega$    pF
Output:	$Z_{OUT} = R_{OUT} \parallel C_{OUT}$	—	0,5    10,3	—	k $\Omega$    pF
<b>Temperature coefficient of frequency</b>	$TC_f$	—	-72	—	ppm/K



Data Sheet

Characteristics of channel 2 (switching pin 2 connected to pin 1)



Reference temperature:  $T_A = 25\text{ °C}$   
 Terminating source impedance:  $Z_S = 50\ \Omega$   
 Terminating load impedance:  $Z_L = 2\text{ k}\Omega \parallel 3\text{ pF}$

		min.	typ.	max.	
<b>Insertion attenuation</b>					
	$\alpha$				
Reference level for the following data	32,40 MHz	12,2	13,7	15,2	dB
<b>Relative attenuation</b>					
	$\alpha_{rel}$				
Picture carrier	38,90 MHz	45,0	61,0	—	dB
	34,40 MHz	33,0	37,0	—	dB
Adjacent picture carrier	30,90 MHz	46,0	58,0	—	dB
Adjacent sound carrier	40,40 MHz	37,0	47,0	—	dB
Lower sidelobe	25,00 ... 30,90 MHz	36,0	42,0	—	dB
Upper sidelobe	38,90 ... 45,00 MHz	35,0	41,0	—	dB
<b>Impedance at 32,40 MHz</b>					
Input:	$Z_{IN} = R_{IN} \parallel C_{IN}$	—	0,7 $\parallel$ 16,0	—	k $\Omega$ $\parallel$ pF
Output:	$Z_{OUT} = R_{OUT} \parallel C_{OUT}$	—	0,7 $\parallel$ 13,9	—	k $\Omega$ $\parallel$ pF
<b>Temperature coefficient of frequency</b>	$TC_f$	—	-72	—	ppm/K



Data Sheet



Frequency response of channel 1

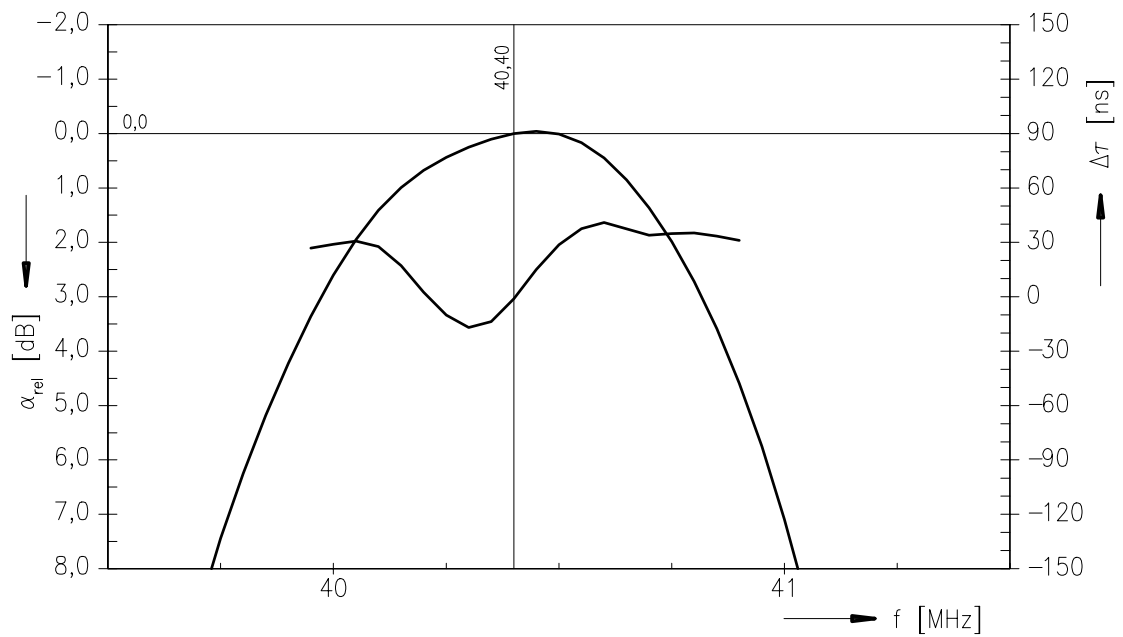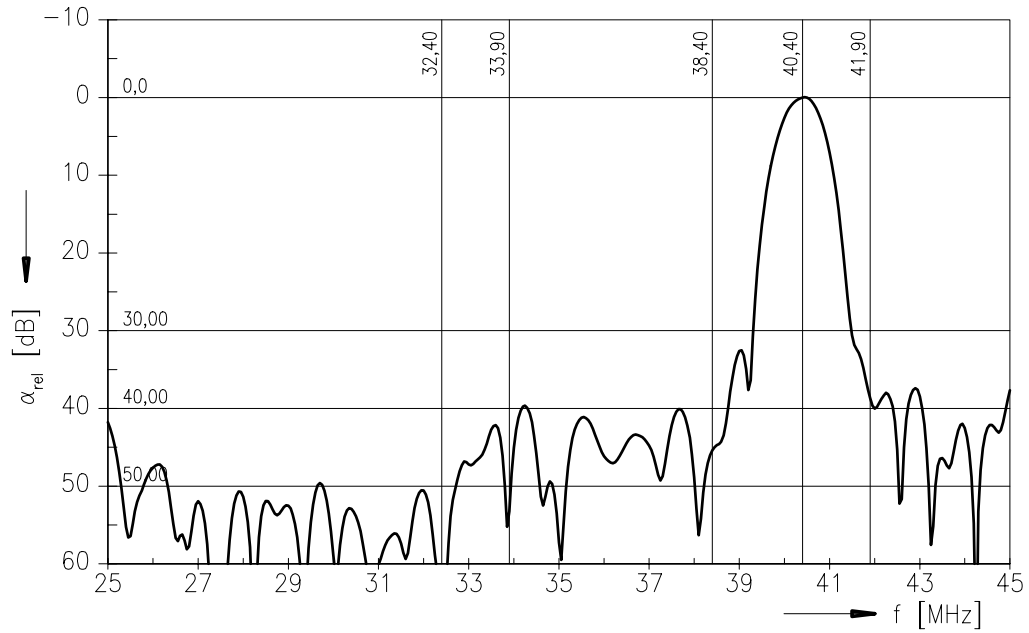



Data Sheet

Frequency response of channel 2

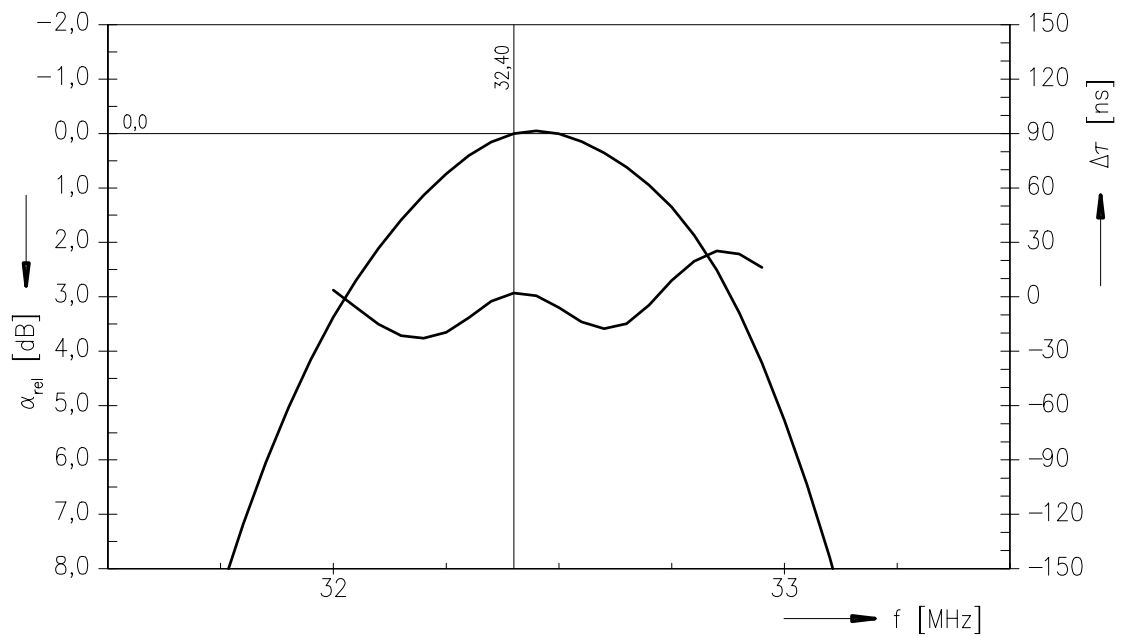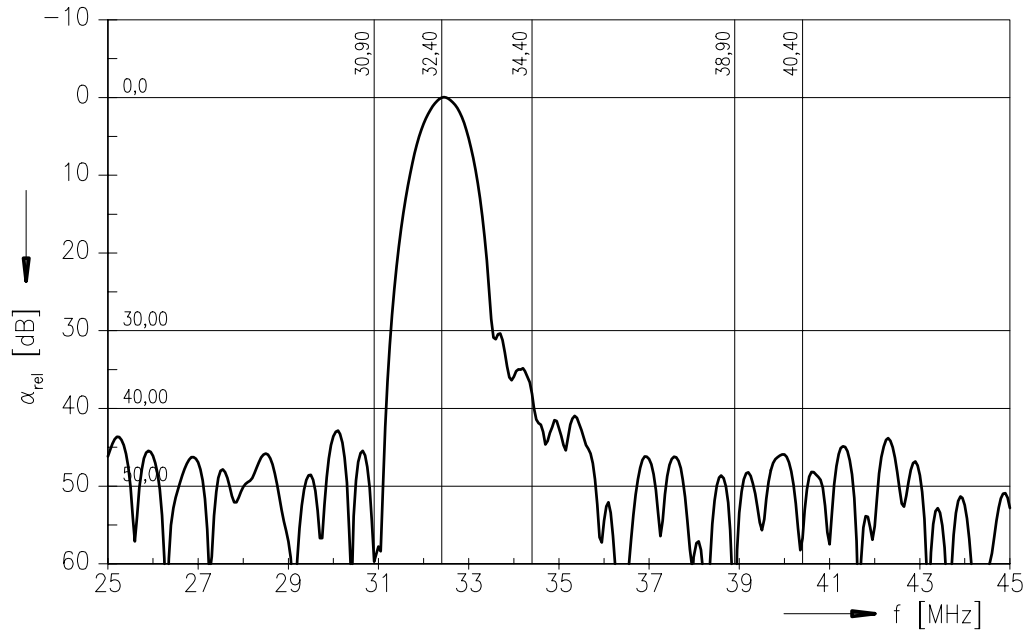



**SAW Components**

**L 9653 M**

**IF Filter for Audio Applications**

**33,90 MHz and 38,90 MHz**

**Data Sheet**

**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW CE MM PD**

**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 2001. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View B39389-L9653-M100 on WIN SOURCE](#)
- [EPCOS \(TDK\) Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management