



**THE DATASHEET OF
B39458-M1967-M100**





SAW Components

Data Sheet M 1967 M





SAW Components

M 1967 M

IF Filter for Intercarrier Applications

45,75 MHz

Data Sheet

Standard

Plastic package **SIP5K**



- M/N

Features

- TV IF filter with Nyquist slope and sound shelf
- High color carrier level
- Constant group delay

Terminals


- Tinned CuFe alloy

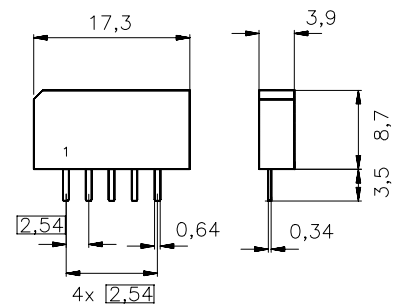

Dimensions in mm, approx. weight 1,0 g

Pin configuration

- 1 Input
- 2 Input - ground
- 3 Chip carrier - ground
- 4 Output
- 5 Output



Type	Ordering code	Marking and package according to	Packing according to
M 1967 M	B39458-M1967-M100	C61157-A1-A15	F61074-V8067-Z000

Maximum ratings

Operable temperature range	T_A	-25/+65	°C	
Storage temperature range	T_{stg}	-40/+85	°C	
DC voltage	V_{DC}	12	V	between any terminals
AC voltage	V_{pp}	10	V	between any terminals



SAW Components

M 1967 M

IF Filter for Intercarrier Applications

45,75 MHz

Data Sheet

Characteristics



Reference temperature: $T_A = 25 (45) \text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 50 \text{ } \Omega$
 Terminating load impedance: $Z_L = 2 \text{ k}\Omega \parallel 3 \text{ pF}$

		min.	typ.	max.	
Insertion attenuation	α				
Reference level for the following data	44,06 (44,00) MHz	11,1	12,6	14,1	dB
Relative attenuation	α_{rel}				
Picture carrier	45,81 (45,75) MHz	5,0	6,0	7,0	dB
Color carrier	42,23 (42,17) MHz	0,0	1,0	2,0	dB
	41,98 (41,92) MHz	—	3,0	—	dB
	41,73 (41,67) MHz	—	7,4	—	dB
Sound carrier	41,31 (41,25) MHz	17,6	19,1	20,6	dB
Adjacent picture carrier	39,81 (39,75) MHz	50,0	62,0	—	dB
Adjacent sound carrier	47,31 (47,25) MHz	46,0	56,0	—	dB
Lower sidelobe	35,06 ... 39,81 (35,00 ... 39,75) MHz	41,0	46,0	—	dB
Upper sidelobe	47,31 ... 55,06 (47,25 ... 55,00) MHz	42,0	47,0	—	dB
Reflected wave signal suppression					
1,1 μs ... 6,0 μs after main pulse (test pulse 250 ns, carrier frequency 44,06 MHz)		42,0	52,0	—	dB
Feedthrough signal suppression					
1,2 μs ... 1,1 μs before main pulse (test pulse 250 ns, carrier frequency 44,06 MHz)		50,0	56,0	—	dB
Group delay ripple (p-p)	$\Delta\tau$	—	40	—	ns
Impedance at 44,06 MHz					
Input: $Z_{IN} = R_{IN} \parallel C_{IN}$		—	0,9 \parallel 14,9	—	k Ω \parallel pF
Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$		—	0,9 \parallel 4,1	—	k Ω \parallel pF
Temperature coefficient of frequency	TC_f	—	-72	—	ppm/K



Data Sheet

Frequency response

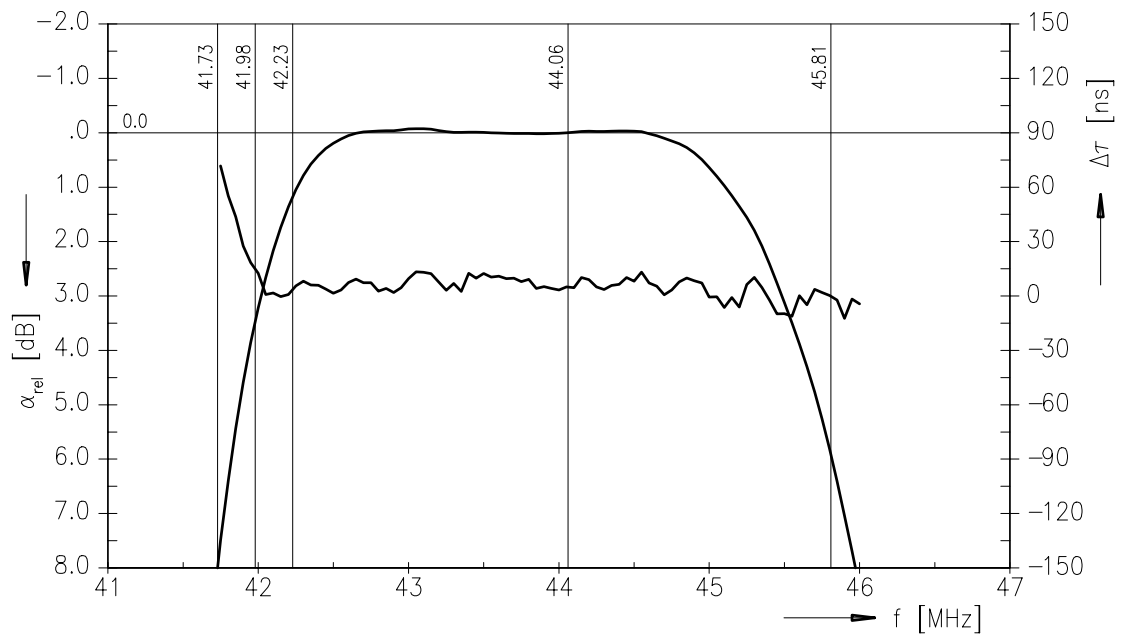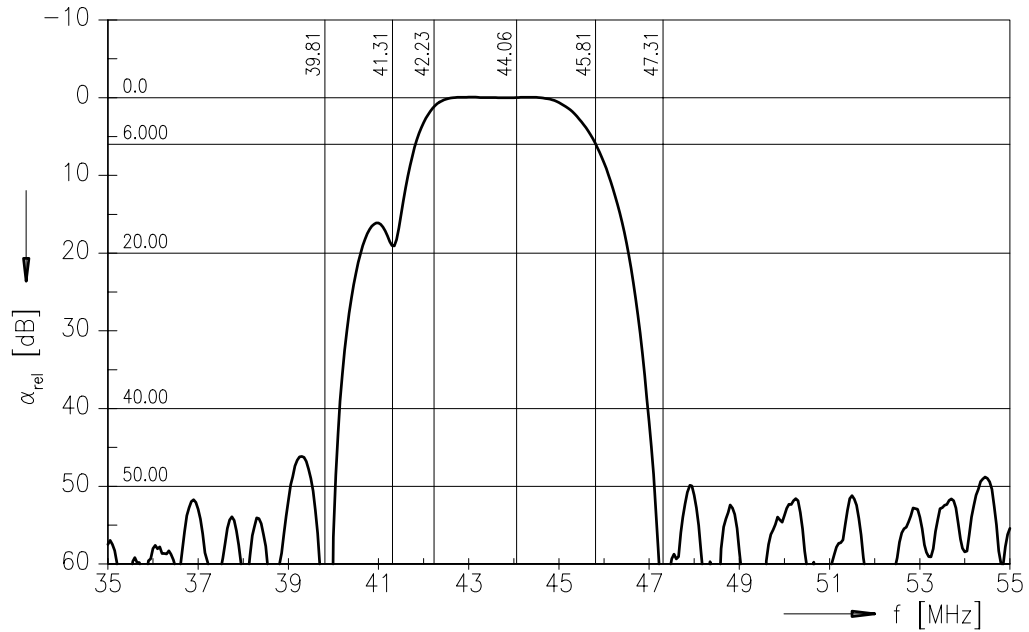



SAW Components


M 1967 M

IF Filter for Intercarrier Applications


45,75 MHz

Data Sheet

Frequency response

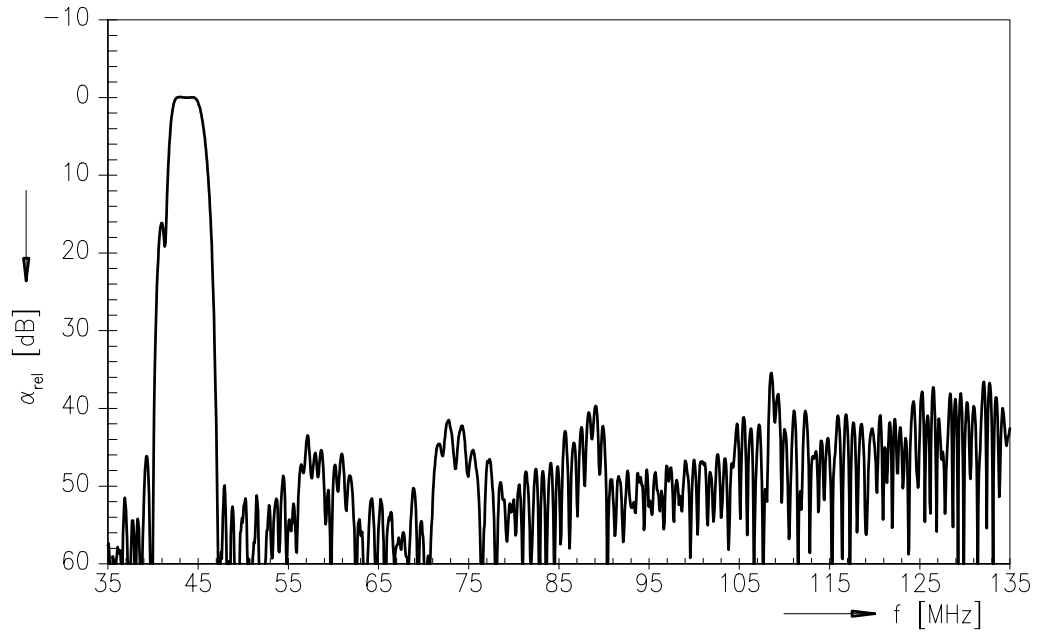

Time domain response

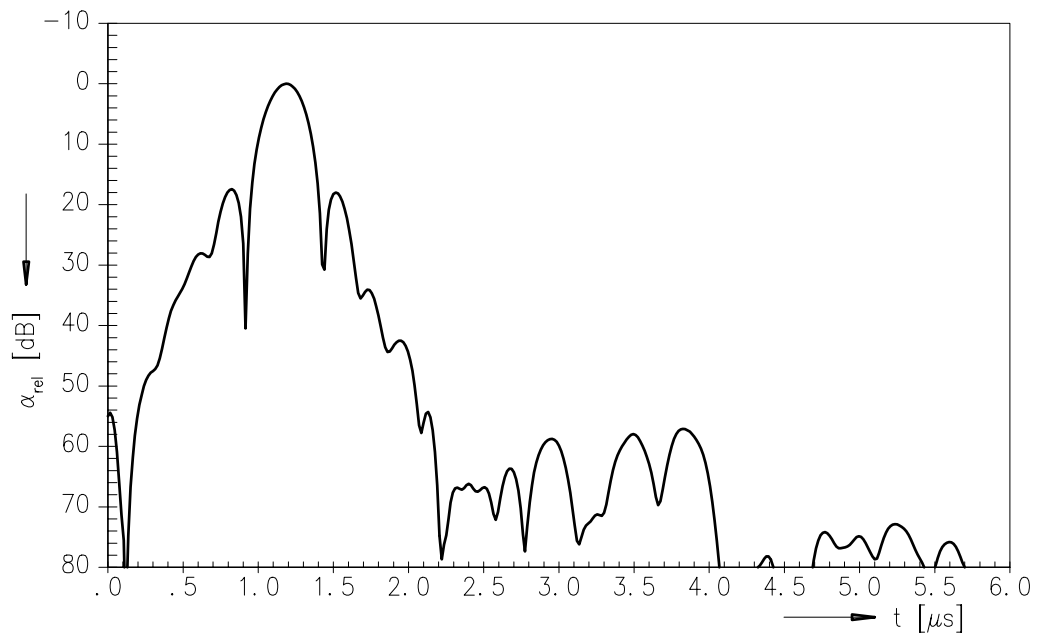



SAW Components

M 1967 M

IF Filter for Intercarrier Applications

45,75 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW CE MM PD

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2001. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.



Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View B39458-M1967-M100 on WIN SOURCE](#)
-  [EPCOS \(TDK\) Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management