



**THE DATASHEET OF
HMC916LP3ETR**



SMT MMIC x3 ACTIVE FREQUENCY MULTIPLIER, 8 - 16 GHz OUTPUT



Typical Applications


The HMC916LP3E is Ideal for:

- Microwave Radio & VSAT
- Military Radios, Radar & ECM
- Test Instrumentation

Features

- Output Power: 2 dBm
- Spurious Suppression: >15 dBc
- SSB Phase Noise: -152 dBc/Hz @ 100 kHz Offset
- Single Supply: +5V @ 83 mA
- 16 Lead 3x3 mm SMT Package: 9 mm²

Functional Diagram

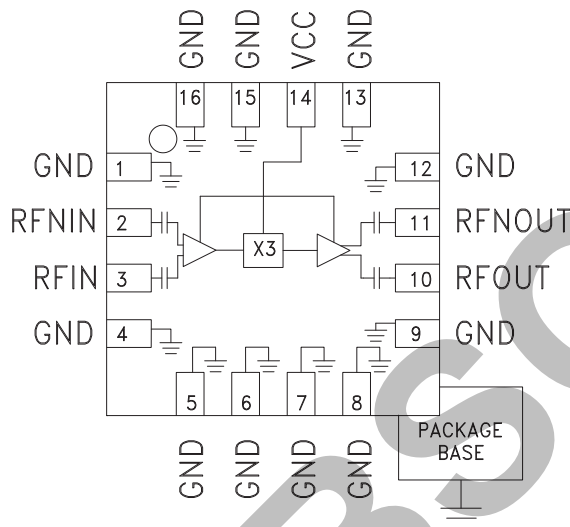

General Description

The HMC916LP3E is an active x3 frequency multiplier in a 3x3 mm leadless QFN surface mount package. Power output is 2 dBm typical from a single +5V supply and varies little vs. input power, temperature and supply voltage. Suppression of undesired fundamental and spurious is 15 dBc typical with respect to output signal level. The low additive SSB phase noise of -152 dBc/Hz at 100 kHz offset helps the user maintain good system noise performance. The HMC916LP3E is ideal for use in LO multiplier chains allowing reduced parts count versus traditional approaches.

Electrical Specifications, $T_A = +25^\circ\text{C}$, $V_{CC} = 5V$ [1]


| Parameter | Min. | Typ. | Max. | Units |
|--|-------------|------|------|--------|
| Frequency Range, Input | 2.66 - 5.33 | | | GHz |
| Frequency Range, Output | 8 - 16 | | | GHz |
| Input Power Range | 0 | 5 | 10 | dBm |
| Output power Range | 2 | | | dBm |
| Spurious | -15 | | | dBc |
| Input Return Loss | 13 | | | dB |
| Output Return Loss | 15 | | | dB |
| SSB Phase Noise (100 kHz offset) $P_{in} = +5$ dBm | -152 | | | dBc/Hz |
| Supply Current (I_{CC}) | 83 | | | mA |

[1] All data shown is single ended operation.




**SMT MMIC x3 ACTIVE
FREQUENCY MULTIPLIER, 8 - 16 GHz OUTPUT**


Output Power vs. Temperature @ 0 dBm Drive Level [1]

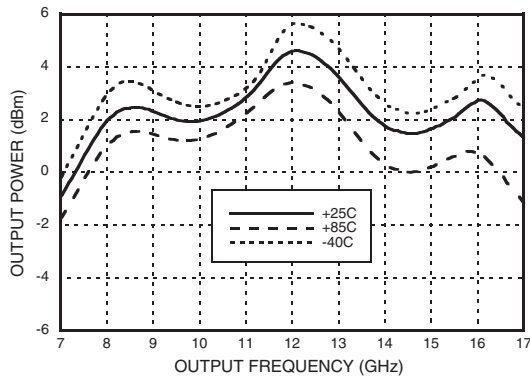


Output Power vs. Drive Level [1]

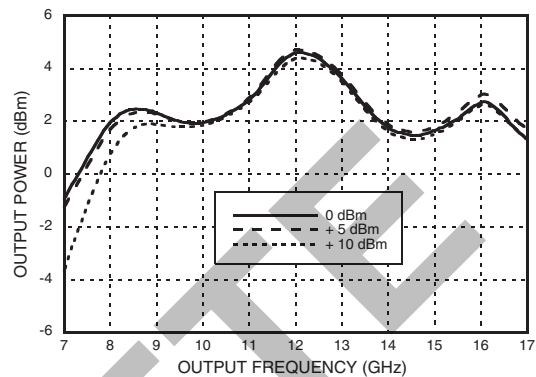


Output Power vs. Supply Voltage @ 0 dBm Drive Level [1]

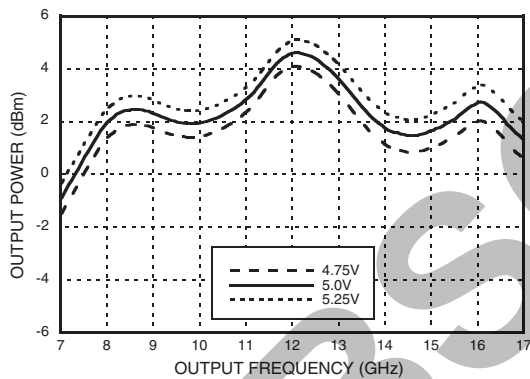


Spurious Output vs. Fin Pin = +5 dBm [1]

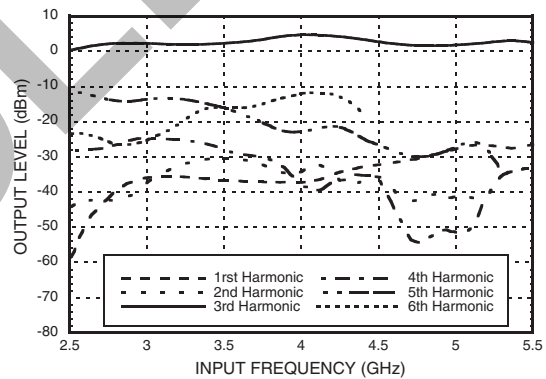

Input Return Loss vs. Temperature [1]

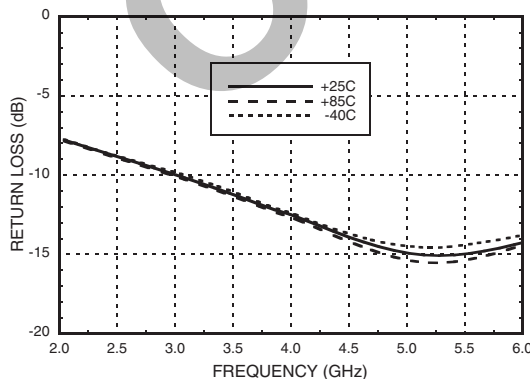

Output Return Loss vs. Temperature [1]

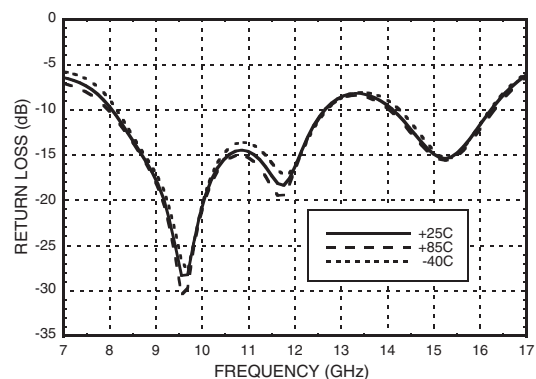


[1] All data shown is single ended operation.




**SMT MMIC x3 ACTIVE
FREQUENCY MULTIPLIER, 8 - 16 GHz OUTPUT**

SSB Phase Noise vs. Pin
F_{out} = 12 GHz, T = 25 °C [1]

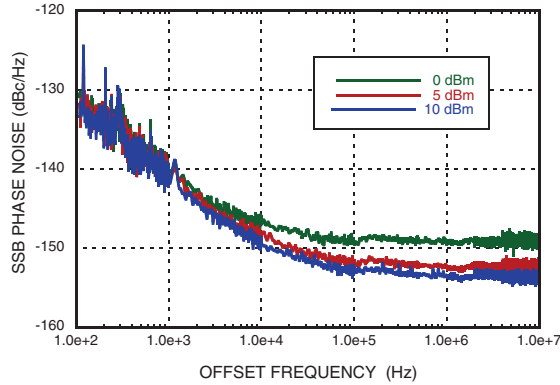

I_{cc} vs. Temperature [1]

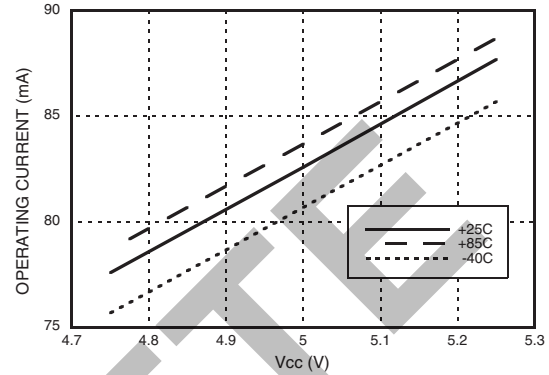

Absolute Maximum Ratings

| | |
|----------------------------------|----------------|
| RF Input (V _{cc} = +5V) | +20 dBm |
| V _{cc} | +6.0V |
| Storage Temperature | -65 to +150 °C |
| ESD Sensitivity (HBM) | 100V |

Reliability Information

| | |
|--|-------------------|
| Junction Temperature To Maintain 1 Million Hour MTF | 150 °C |
| Nominal Junction Temperature (T = 85 °C) | 101.4 °C |
| Thermal Resistance (Junction to GND paddle, 5V supply) | 39.5 °C/W |
| Operating Temperature | -40 °C to + 85 °C |



**ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS**

[1] All data shown is single ended operation.


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at www.analog.com Application Support: Phone: 1-800-ANALOG-D



SMT MMIC x3 ACTIVE FREQUENCY MULTIPLIER, 8 - 16 GHz OUTPUT

Outline Drawing

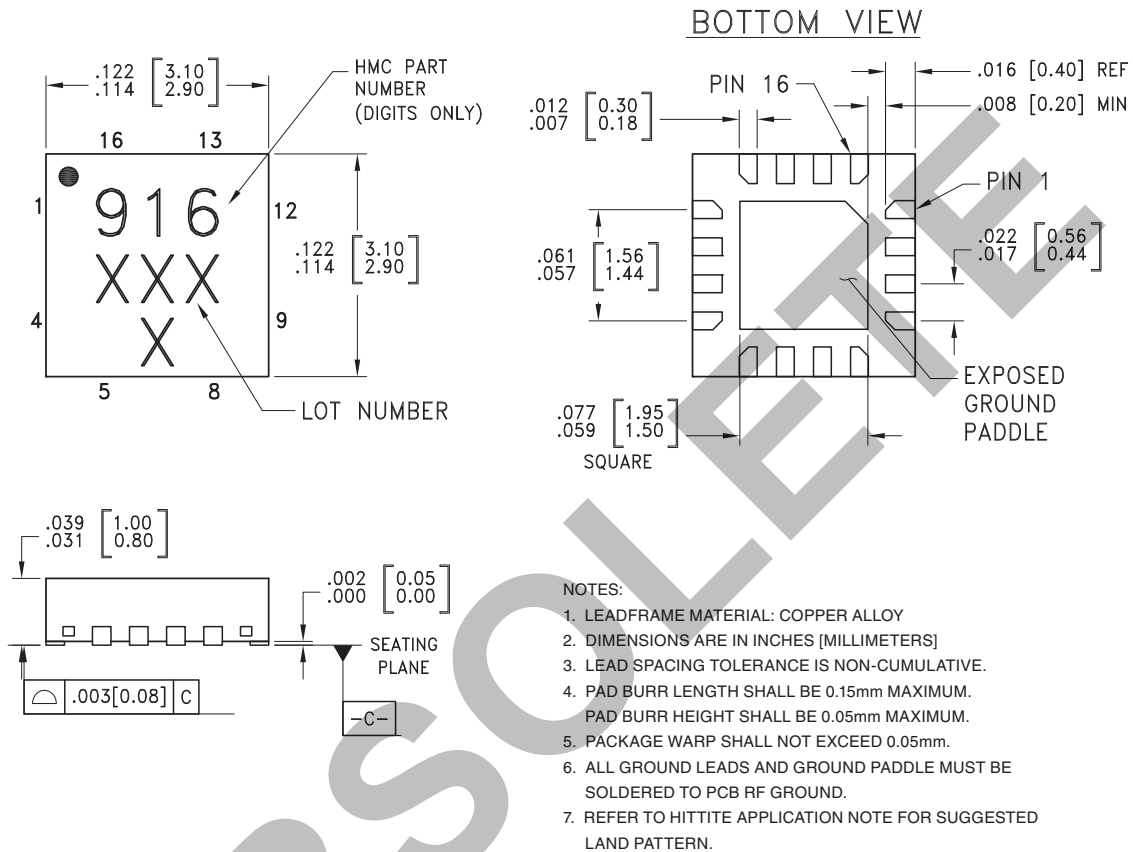

Package Information

| Part Number | Package Body Material | Lead Finish | MSL Rating | Package Marking ^[1] |
|-------------|--|---------------|---------------------|--------------------------------|
| HMC916LP3E | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 ^[2] | 916 XXXX |

[1] 4-Digit lot number XXXX

[2] Max peak reflow temperature of 260 °C



SMT MMIC x3 ACTIVE FREQUENCY MULTIPLIER, 8 - 16 GHz OUTPUT

Pin Description


| Pin Number | Function | Description | Interface Schematic |
|--------------------------|----------------|--|---------------------|
| 1, 4 - 9, 12, 13, 15, 16 | GND | These pins and exposed paddle must be connected to RF/DC ground. | |
| 2 | RFNIN (or GND) | This pin is AC coupled and matched to 50 ohms, and is 180° out of phase with pin 3 for differential operation. RF/DC ground for single ended operation. | |
| 3 | RFIN | This pin is AC coupled and matched to 50 ohms | |
| 10 | RFOUT | This pin is AC coupled and matched to 50 ohms | |
| 11 | RFNOUT | This pin is AC coupled and matched to 50 ohms, and is 180° out of phase with pin 10 for differential operation. Terminate in 50 ohms for single ended operation. | |
| 14 | Vcc | Supply voltage +5V | |

OBSOLETE



**SMT MMIC x3 ACTIVE
FREQUENCY MULTIPLIER, 8 - 16 GHz OUTPUT**

Evaluation PCB

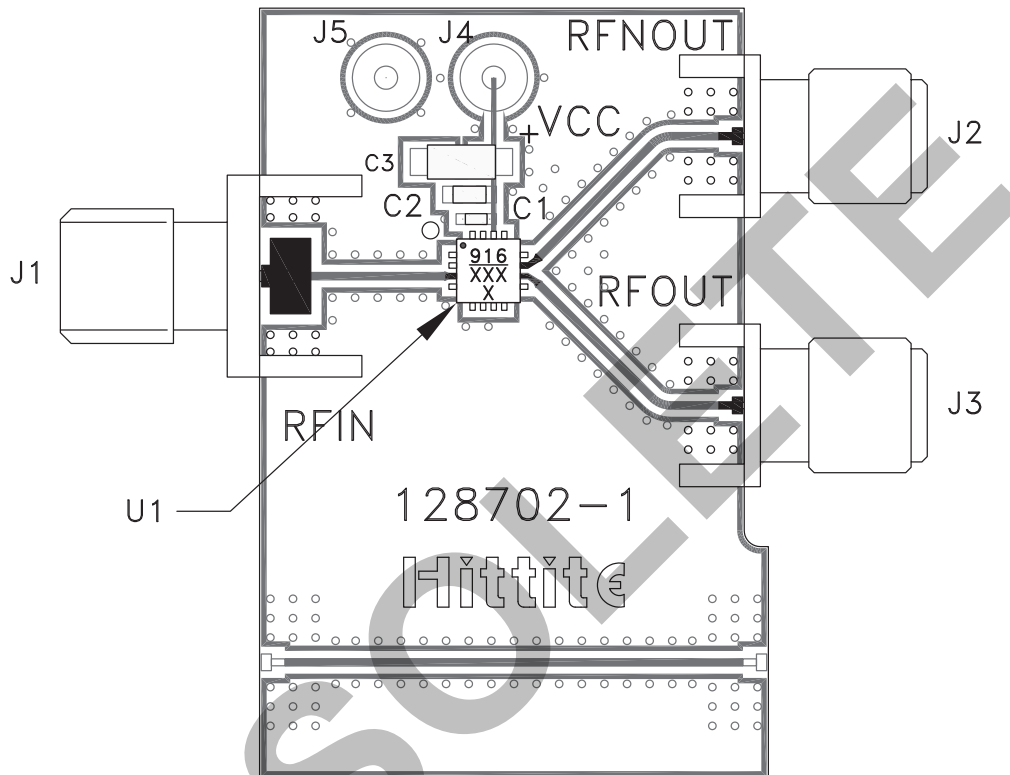

List of Materials for Evaluation PCB 128383 [1]

| Item | Description |
|---------|---------------------------------|
| J1 - J3 | PCB Mount SMA Connector |
| J4, J5 | DC Pin |
| C1 | 100 pF Capacitor, 0402 Pkg. |
| C2 | 1000 pF Capacitor, 0402 Pkg. |
| C3 | 4.7 μF Capacitor, 0402 Pkg. |
| U1 | HMC916LP3E x3 Active Multiplier |
| PCB [2] | 128702 Eval Board |


[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the application should be generated with proper RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. The evaluation circuit board shown is available from Hittite upon request.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View HMC916LP3ETR on WIN SOURCE](#)
-  [Analog Devices Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management