



**THE DATASHEET OF
NX2520SA-26MHZ-STD-CSX-1**



NX2520SA For OA / AV Mobile Communications/ Short-range Wireless


■ Features

Ideal for such as Bluetooth, Wi-Fi, smartphone and tablet pc.

- Compact and thin. (2.5 × 2.0 × 0.50 mm typ.)
- Excellent environmental characteristics, including heat and shock resistance.
- Lead-free. Meets the requirements for re-flow profiling using lead-free solder.

Pb Free

RoHS Compliant
Directive 2011/65/EU
Directive (EU) 2015/863

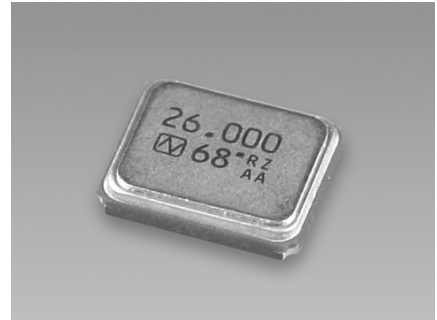

■ Specifications

Item	Model	NX2520SA		
		Standard		Optional
Nominal Frequency (MHz)		16 ≤ F ≤ 80	16 ≤ F ≤ 54	16 ≤ F ≤ 80
Overtone Order		Fundamental		
Frequency Tolerance (25 ±3 °C)		±15 × 10 ⁻⁶	±10 × 10 ⁻⁶	±8×10 ⁻⁶ (16 ≤ F ≤ 40MHz) ±12×10 ⁻⁶ (40 < F ≤ 80MHz)
Frequency versus Temperature Characteristics (with reference to +25 °C)		±25 × 10 ⁻⁶	±10 × 10 ⁻⁶	±10 × 10 ⁻⁶ (Temp extended case, *1)
Operating Temperature Range(°C)		-40 to +85	-20 to +75	-20 to +75 (-40 to +85 °C Extended)
Storage Temperature Range (°C)		-40 to +85		
Equivalent Series Resistance		Refer to *2	Refer to *3	Refer to *2
Level of Drive (µW)		10 (Max. 100)		10 (Max. 200) *1
Load Capacitance (pF)		8		6 to 32
Frequency Aging (+25 °C)		---		Max. ±3×10 ⁻⁶ / year *1
Specifications Number		STD-CSW-6	STD-CSX-1	Refer to *4

Please specify the model name, frequency, and specification number when you order products.

For further questions regarding specifications, please feel free to contact us.

*1 If you have any other requests, NDK will study it.

*4 Ordering information: Overtone Order Fundamental / 3rd Overtone, the Operating Temperature Range, Frequency versus Temperature Characteristics, Frequency Tolerance, and Load Capacitance.

Ex. Model, Frequency (24.000000MHz 6digits), S1: Fundamental or S3 : 3rd overtone


- Operating Temperature Range (-40 to +85°C) - Frequency versus Temperature Characteristics (±25 × 10⁻⁶)
- Frequency Tolerance (±10 × 10⁻⁶) - Load Capacitance (8pF)

NX2520SA

24.000000MHz

S1-4085-25-10-8

■ Dimensions

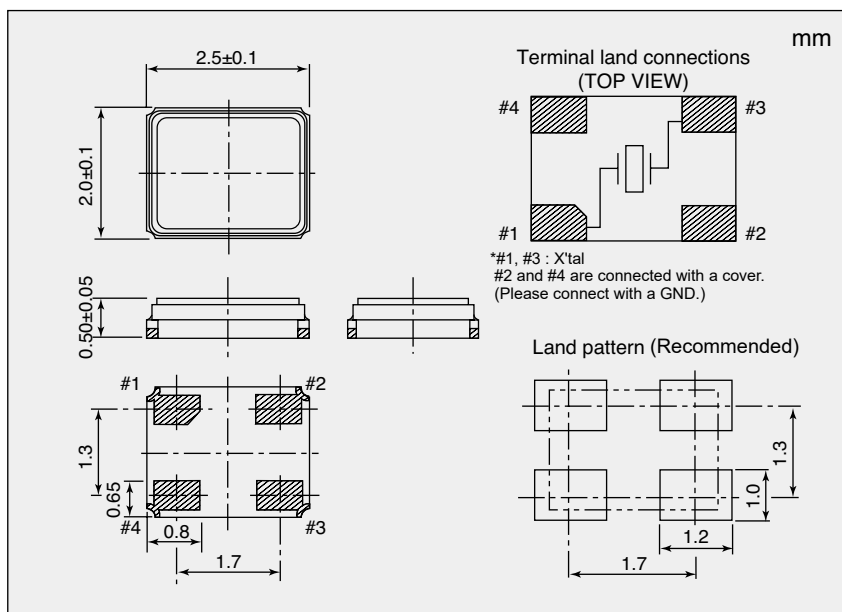

*2 Equivalent Series Resistance

Nominal Frequency (MHz)	Equivalent Series Resistance Max. (Ω)
16 ≤ F < 20	80
20 ≤ F < 30	60
30 ≤ F < 35	50
35 ≤ F ≤ 80	40

If you have any other requests, NDK will study it.



*3 Equivalent Series Resistance

Nominal Frequency (MHz)	Equivalent Series Resistance Max. (Ω)
16 ≤ F < 20	80
20 ≤ F < 30	60
30 ≤ F < 35	50
35 ≤ F ≤ 54	40

If you have any other requests, NDK will study it.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View NX2520SA-26MHZ-STD-CSX-1 on WIN SOURCE](#)
-  [NDK Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management