



**THE DATASHEET OF
DMF3Z5R5H474M3DTA0**






Low ESR, In Small, Slim Package~

- Hand Soldering Only
- REACH
- RoHS




ESR	Thickness (mm)	Operation Temp.
12	3.2(max 3.4)	-40°C~+70°C
21 × 14		


Package Current




ESR




4. Charge and Discharge Characteristics

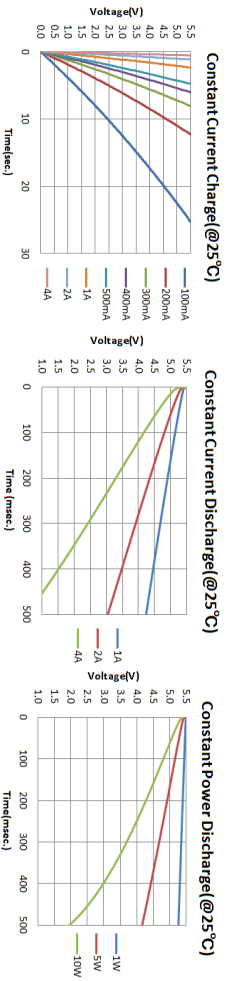

5-1. High Temperature Loading Test 1 (Test Condition: 4.2V / 70°C)

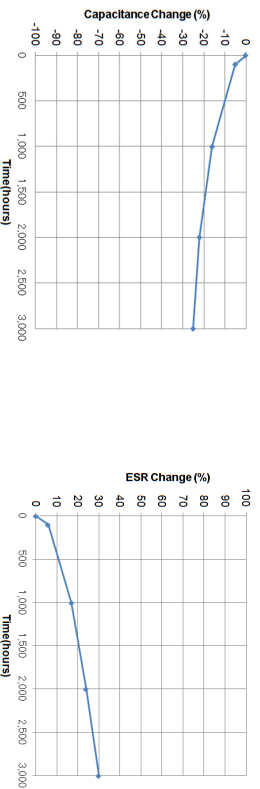

5-2. High Temperature Loading Test 2 (Test Condition: 5.5V / 70°C)

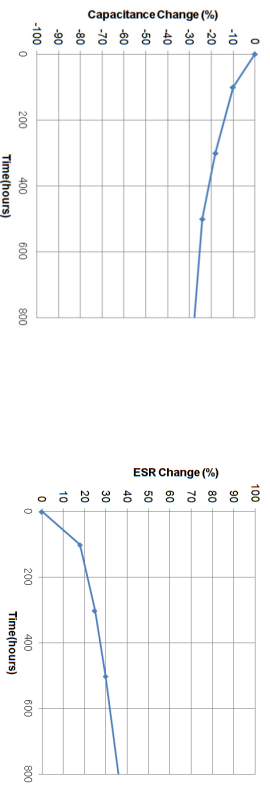

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View DMF3Z5R5H474M3DTA0 on WIN SOURCE](#)
- ⊖ [Murata Electronics North America Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management