



**THE DATASHEET OF
TH8056KDC-AAA-008-TU**



Product Information

Single Wire CAN Transceiver

TH8056

The TH8056 is a physical layer device for a single wire data link capable of operating with various CSMA/CR protocols such as the Bosch Controller Area Network (CAN) version 2.0. This serial data link network is intended for use in applications where a high data rate is not required and a lower data rate can achieve cost reductions in both the physical media components and the microprocessor and/or dedicated logic devices that use the network.

The bit rate for normal communications is typically 33.33kbit/s, for high-speed transmissions as described above a typical bit rate of 83.33kbit/s is recommended. The TH8056 is designed in accordance with the Single Wire CAN Physical Layer Specification GMW3089 V2.x and supports many additional features like under-voltage lock-out, time-out for faulty blocked input signals, output blanking time in case of bus ringing and a very low sleep mode current.

Features

- Fully compatible with GMW3089 V2.x and J2411 Single Wire CAN specification
- 30 μ A typical power consumption in sleep mode
- Operating voltage range 5V to 27V
- Up to 40 kbps bus speed
- Up to 100 kbps high-speed mode
- Logic inputs compatible with 3.3V and 5V
- Control pin for external voltage regulators
- Low RFI due to output wave shaping in normal and high voltage wake up mode
- Fully integrated receiver filter
- Bus terminals proof against short-circuits and transients in automotive environment
- Loss of ground protection, very low leakage current (typ. 20 μ A at 27V and 125 $^{\circ}$ C)
- Protection against load dump, jump start
- Thermal overload and short circuit protection
- ESD protection of 4 kV on CAN pin (2kV on any other pin)
- Under voltage lockout
- Bus dominant time-out feature
- 14-pin thermally enhanced and 8-pin SOIC package
- Available as lead free and RoHS compliant

Melexis
Microelectronic Integrated Systems

Automotive ICs

RF & RFID

Intelligent Drivers
and Actuators


Bus ICs

Hall ICs

CMOS Imaging


Silicon MEMS

IR Temperature



Small things make a big difference.


Application Circuitry

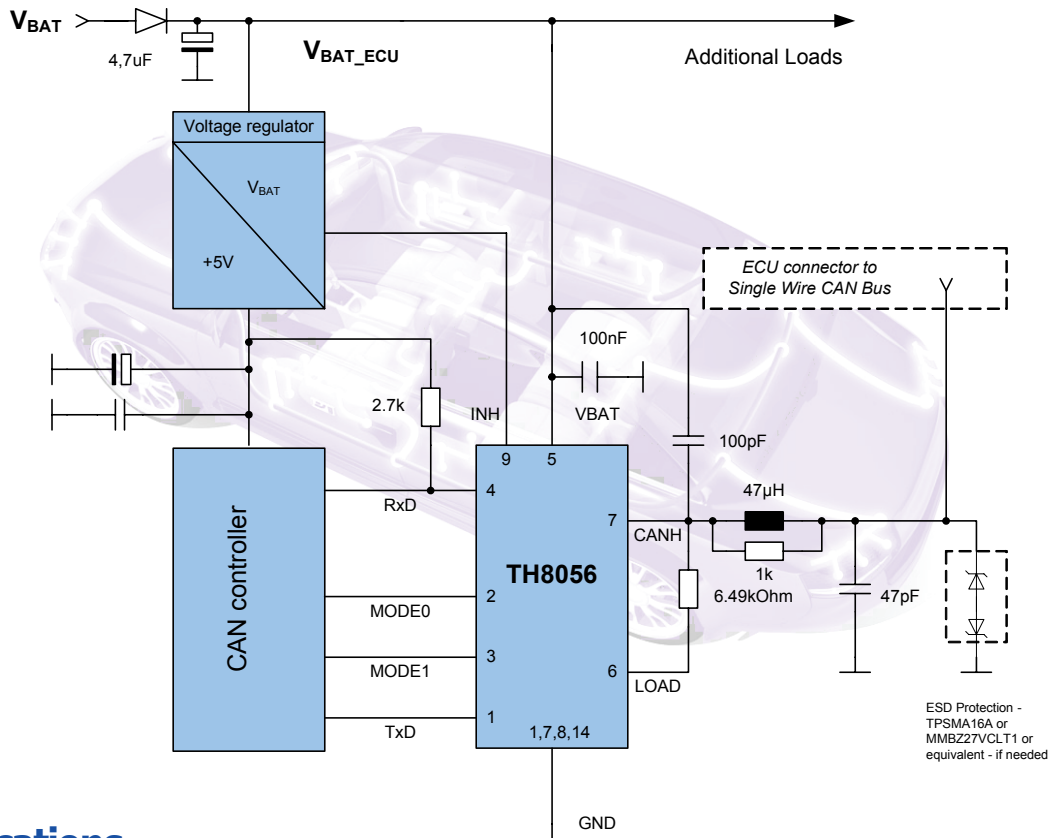


Applications

- All Applications which require a Single Wire CAN Interface
- GM-LAN according to GMW3089 Rev 2.x
- Usable for GMT-900, Epsilon-2 and Global-A platforms

Pinout

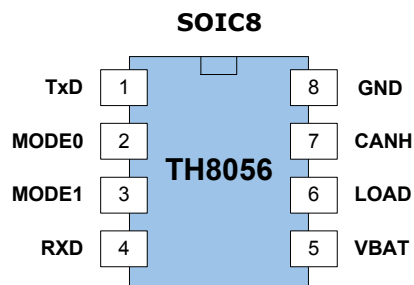

SOIC14, fused leadframe

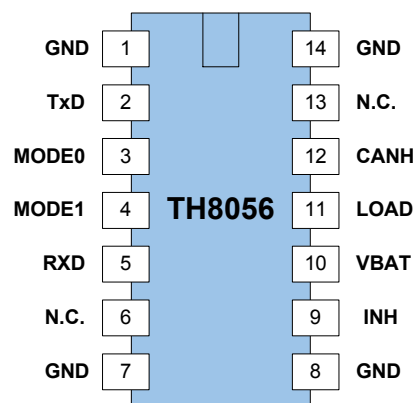

Disclaimer:

Devices sold by Melexis are covered by the warranty and patent indemnification provisions appearing in its Term of Sale. Melexis makes no warranty, express, statutory, implied, or by description regarding the information set forth herein or regarding the freedom of the described devices from patent infringement. Melexis reserves the right to change specifications and prices at any time and without notice. Therefore, prior to designing this product into a system, it is necessary to check with Melexis for current information. This product is intended for use in normal commercial applications. Applications requiring extended temperature range, unusual environmental requirements, or high reliability applications, such as military, medical life-support or life-sustaining equipment are specifically not recommended without additional processing by Melexis for each application. The information furnished by Melexis is believed to be correct and accurate. However, Melexis shall not be liable to recipient or any third party for any damages, including but not limited to personal injury, property damage, loss of profits, loss of use, interrupt of business or indirect, special incidental or consequential damages, of any kind, in connection with or arising out of the furnishing, performance or use of the technical data herein. No obligation or liability to recipient or any third party shall arise or flow out of Melexis' rendering of technical or other services. © 2006 Melexis NV. All rights reserved.

Email Europe and rest of the world:
sales_europe@melexis.com

Email USA :
sales_usa@melexis.com

Email Asia:
sales_asia@melexis.com

For additional information go to our website at:

www.melexis.com

Melexis
Microelectronic Integrated Systems

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View TH8056KDC-AAA-008-TU on WIN SOURCE](#)
- ⊖ [Melexis Technologies NV Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management