



THE DATASHEET OF W04



W005 - W10

PRV : 50 - 1000 Volts

Io : 1.5 Ampere


FEATURES :

- * High case dielectric strength
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Ideal for printed circuit board
- * **Pb / RoHS Free**

MECHANICAL DATA :

- * Case : Reliable low cost construction utilizing molded plastic technique
- * Epoxy : UL94V-O rate flame retardant
- * Terminals : Plated leads solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Polarity symbols marked on case
- * Mounting position : Any
- * Weight : 1.29 grams

SILICON BRIDGE RECTIFIERS

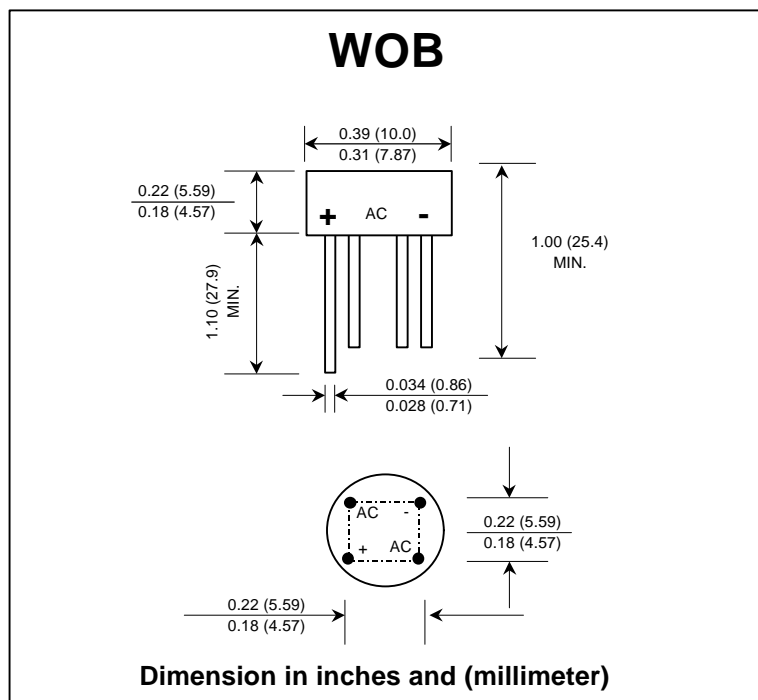

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

RATING	SYMBOL	W005	W01	W02	W04	W06	W08	W10	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Current 0.375" (9.5 mm) lead length	$I_{F(AV)}$	1.5							A
Peak Forward Surge Current Single half sine wave Superimposed on rated load (JEDEC Method)	I_{FSM}	50							A
Rating for fusing (t < 8.3 ms.)	I^2t	10							A ² S
Maximum Forward Voltage per Diode at $I_F = 1.0$ A	V_F	1.0							V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	10							μ A
	$I_{R(H)}$	1.0							mA
Typical Junction Capacitance per Diode (Note 1)	C_J	14							pf
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	36							°C/W
Operating Junction Temperature Range	T_J	- 50 to + 150							°C
Storage Temperature Range	T_{STG}	- 50 to + 150							°C

Notes :

1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.

2) Thermal resistance from Junction to Ambient at 0.375" (9.5 mm) lead length P.C. Board mounting.

RATING AND CHARACTERISTIC CURVES (W005 - W10)

FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

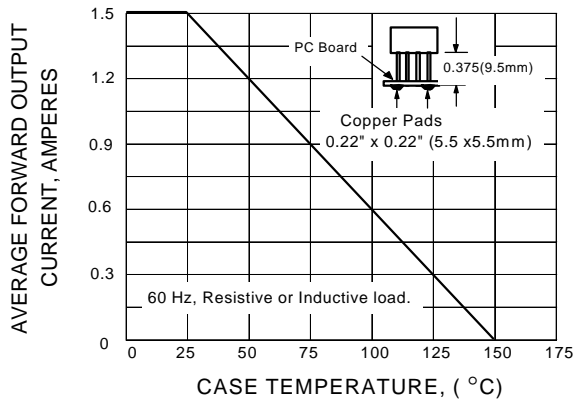


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

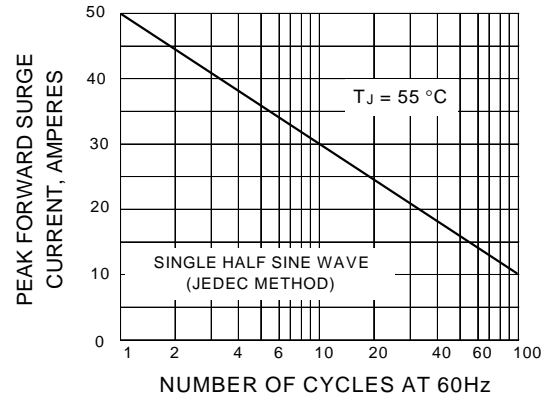


FIG.3 - TYPICAL FORWARD CHARACTERISTICS


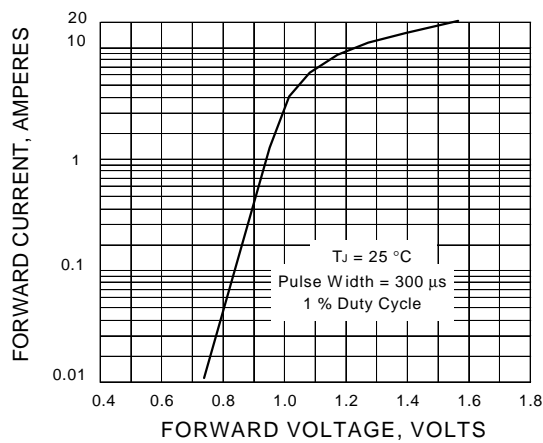


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

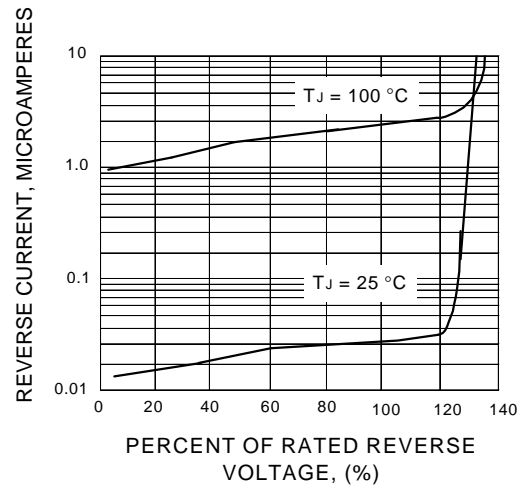

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View W04](#) on WIN SOURCE
- ⊖ [EIC discrete Semiconductors](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management