



**THE DATASHEET OF  
PI3EQX12908AZFEX**



**PRODUCT BRIEF**

**SIGNAL INTEGRITY SOLUTIONS**

**PI3EQX12908A**

**PCIe3/10GE/SAS3 12Gps 8-channel ReDriver™ with Linear Equalization**

**Description**

Pericom Semiconductor's PI3EQX12908A is a PCIe3, 10GE-KR, SAS3, 8 differential channels ReDriver™. The device provides programmable linear equalization, output swing and gain, by either pin strapping option or I<sup>2</sup>C Control, to optimize performance over a variety of physical mediums by reducing Inter-symbol interference.

The PI3EQX12908A supports eight 100-Ohm Differential CML data I/O's and extends the signals across other distant data pathways on the user's platform.

The programmable settings can be applied easily via pins, software (I<sup>2</sup>C) or loaded via an external EEPROM.



When operating in the EEPROM mode, the configuration information is automatically loaded on power up, which eliminates the need for an external microprocessor or software driver.

The PI3EQX12908A offers fully Linear Transfer function to fully comply with all PCIe 3, 10GE & SAS3 Link Training signals.

**Applications**

- Rack server
- JBOD storage
- Blade server

**Eye Diagram**

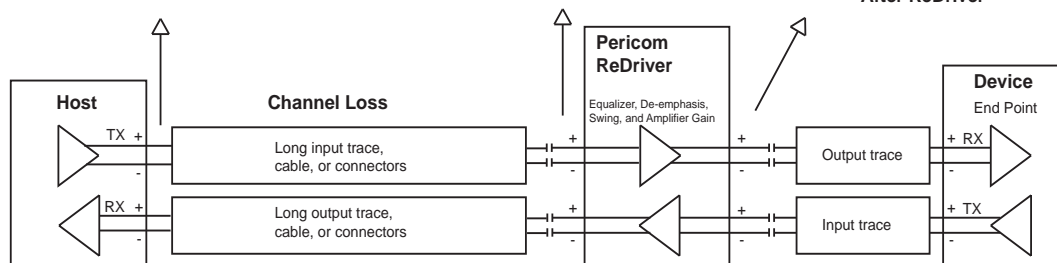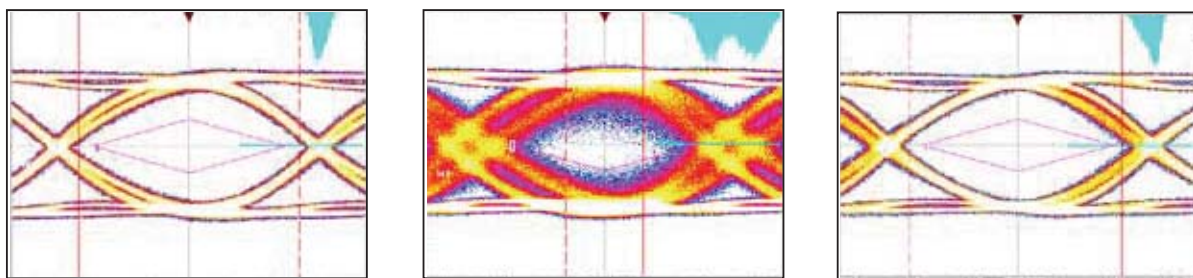

**Features**

- 8-12Gbps serial link with linear equalizer
- Handle up to 36dB channel loss
- Support PCIe Gen 3, 10GE, SAS3 protocol
- Supporting 8 differential channels
- Independent channel configuration of receiver equalization, output swing and flat gain
- Per Channel Activity Detector with selectable input termination between 50Ω to V<sub>DD</sub> and 200KΩ to V<sub>DD</sub>
- Per Channel Output Termination Detector on power up with selectable output termination between 50Ω to V<sub>DD</sub> and high impedance
- Very linear transfer function
- Fully compliant to PCISIG, 10GE-KR, SAS3 Link Training
- Single-ended mode receiver detection for PCIe
- Input Threshold detection
- Pin strap and I<sup>2</sup>C master/slave selectable device programming with external EEPROM
- 4-bit selectable address bit for I<sup>2</sup>C
- Supply Voltage: 3.3V±0.3V
- Industrial Temperature Range: -40°C to 85°C
- Packaging (Pb-free & Green):
- 54-contact TQFN (10mm x 5.5mm x 0.5mm pitch) - flowthrough pinout

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PI3EQX12908AZFEX on WIN SOURCE](#)

 [Diodes Incorporated](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management