




**THE DATASHEET OF
IZ1205S**



3 Watts IZ Series



- Regulated Single & Dual Output
- Wide 2:1 Input Range
- SIP Package
- 1600 VDC Isolation
- Continuous Short Circuit Protection
- Remote On/Off
- 3 Year Warranty


Specification

Input

- Input Voltage Range • See table
 Input Reflected Ripple Current • 35 mA pk-pk through 12 μ H inductor and 47 μ F capacitor, 5 Hz to 20 MHz
 Input Filter • Capacitor

Output

- Output Voltage • See table
 Minimum Load • None⁽⁴⁾
 Line Regulation • $\pm 0.5\%$ max
 Load Regulation • $\pm 1.0\%$ max for a 25-100% load change
 Setpoint Accuracy • $\pm 1\%$ max
 Ripple & Noise • 75 mV pk-pk max, 20 MHz bandwidth
 Short Circuit Protection • Continuous with auto recovery (foldback)
 Cross Regulation • $\pm 5\%$ on dual output models⁽⁵⁾
 Temperature Coefficient • 0.02%/C
 Remote On/Off • Module "on" if pin 3 is open circuit. Module "off" by driving 3-6mA into pin 3. Maximum applied voltage 9.7VDC relative to -Vin. See below.

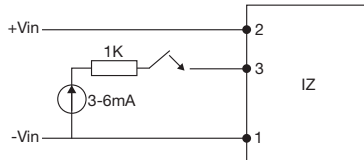

General

- Efficiency • See table
 Isolation Voltage • 1600 VDC
 Isolation Resistance • $10^9 \Omega$
 Isolation Capacitance • 680 pF
 Switching Frequency • 100-650 kHz
 MTBF • >1.34 Mhrs to MIL-HDBK-217F at 25 °C, GB

Environmental


- Operating Temperature • -40 °C to +100 °C, derate from 100% load at +70 °C to 0% load at +100 °C
 Storage Temperature • -40 °C to +125 °C
 Case Temperature • +100 °C max
 Cooling • Convection cooled

Safety

- Safety Approvals • UL60950-1, CAN/CSA C22.2 No.60950-1, UL62368-1, CE & UKCA meets all applicable directives & legislation

Input Voltage	No Load ⁽¹⁾ Input Current	Output Voltage	Output Current	Efficiency	Max Capacitive Load	Model Number ⁽²⁾
4.5-9.0 V	65 mA	3.3 V	700 mA	74%	2200 μ F	IZ0503SA
	70 mA	5.0 V	600 mA	76%	1000 μ F	IZ0505SA
	75 mA	12.0 V	250 mA	82%	470 μ F	IZ0512SA
	75 mA	15.0 V	200 mA	82%	220 μ F	IZ0515SA
	90 mA	± 5.0 V	± 300 mA	77%	± 470 μ F	IZ0505S
	90 mA	± 12.0 V	± 125 mA	81%	± 220 μ F	IZ0512S
9.0-18.0 V	90 mA	± 15.0 V	± 100 mA	82%	± 100 μ F	IZ0515S
	25 mA	3.3 V	700 mA	76%	2200 μ F	IZ1203SA
	35 mA	5.0 V	600 mA	81%	1000 μ F	IZ1205SA
	35 mA	12.0 V	250 mA	84%	470 μ F	IZ1212SA
	35 mA	15.0 V	200 mA	84%	220 μ F	IZ1215SA
	45 mA	± 5.0 V	± 300 mA	80%	± 470 μ F	IZ1205S
18.0-36.0 V	45 mA	± 12.0 V	± 125 mA	83%	± 220 μ F	IZ1212S
	45 mA	± 15.0 V	± 100 mA	82%	± 100 μ F	IZ1215S
	15 mA	3.3 V	700 mA	74%	2200 μ F	IZ2403SA
	15 mA	5.0 V	600 mA	79%	1000 μ F	IZ2405SA
	20 mA	12.0 V	250 mA	82%	470 μ F	IZ2412SA
	20 mA	15.0 V	200 mA	84%	220 μ F	IZ2415SA
36.0-72.0 V	20 mA	± 5.0 V	± 300 mA	80%	± 470 μ F	IZ2405S
	20 mA	± 12.0 V	± 125 mA	83%	± 220 μ F	IZ2412S
	20 mA	± 15.0 V	± 100 mA	83%	± 100 μ F	IZ2415S
	10 mA	3.3 V	700 mA	75%	2200 μ F	IZ4803SA
	10 mA	5.0 V	600 mA	78%	1000 μ F	IZ4805SA
	15 mA	12.0 V	250 mA	81%	470 μ F	IZ4812SA
	15 mA	15.0 V	200 mA	81%	220 μ F	IZ4815SA
	35 mA	± 5.0 V	± 300 mA	78%	± 470 μ F	IZ4805S
	20 mA	± 12.0 V	± 125 mA	80%	± 220 μ F	IZ4812S
	20 mA	± 15.0 V	± 100 mA	81%	± 100 μ F	IZ4815S

Mechanical Details

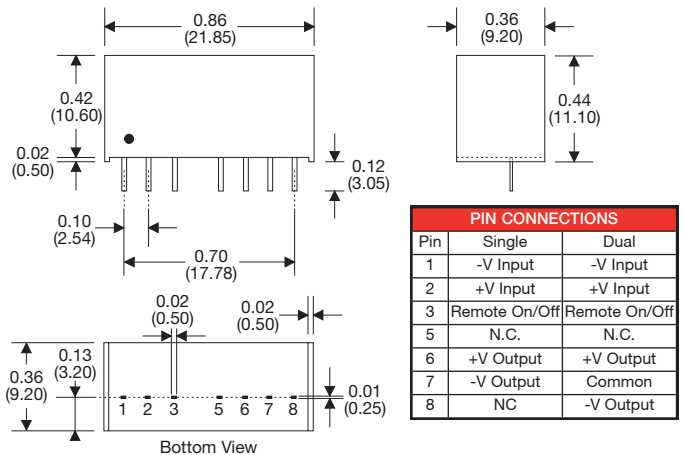



Notes






1. Measured at nominal input voltage.
2. Minimum load of 25% required to meet load regulation & ripple & noise specifications.
3. Operation at no load will not damage the part but it may not meet all specifications.
4. When one output is set to 100% load and the other varies between 25-100% load.
5. Pin pitch tolerance: ± 0.014 (± 0.35)
6. Case tolerance: ± 0.02 (± 0.5)
7. Weight: SIP 0.009 lbs (3.9 g), DIP 0.013 lbs (5.9 g)
8. All dimensions in inches (mm)

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View IZ1205S on WIN SOURCE](#)
-  [XP Power Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management