



**THE DATASHEET OF
PJS008-2003-1**



SPECIFICATIONS:

- Insulation Resistance: 1,000MΩ min. at 500V DC
- Withstanding Voltage: 500Vrms for 1min
- Voltage Rating: 50 Vrms DC
- Current Rating: 0.5A
- Contact Resistance: 100mΩ max. at 20mV max.
- Operating Temp.: -20°C ~ +85°C
- Mating Cycle:
 - Indoor: 10,000 times
 - None-indoor environment: 3,000 times

PART NUMBER:

PJS008-2003-X

Series Name	↑
8 pins Micro SD	↑
PCB Positioning Post:	↑
0 = Without	
1 = With	

MATERIALS AND FINISH:


- Contacts: PB
- Metal Shell: Stainless Steel
- Insulator: LCP

FEATURES:

- Card-detection switch
- Card-flyout prevention design
- Push-Push R/A SMT Reverse mount
- RoHS and REACH Compliant



OUTLINE DIMENSIONS (mm, WITH CARD DETECTION SWITCH):

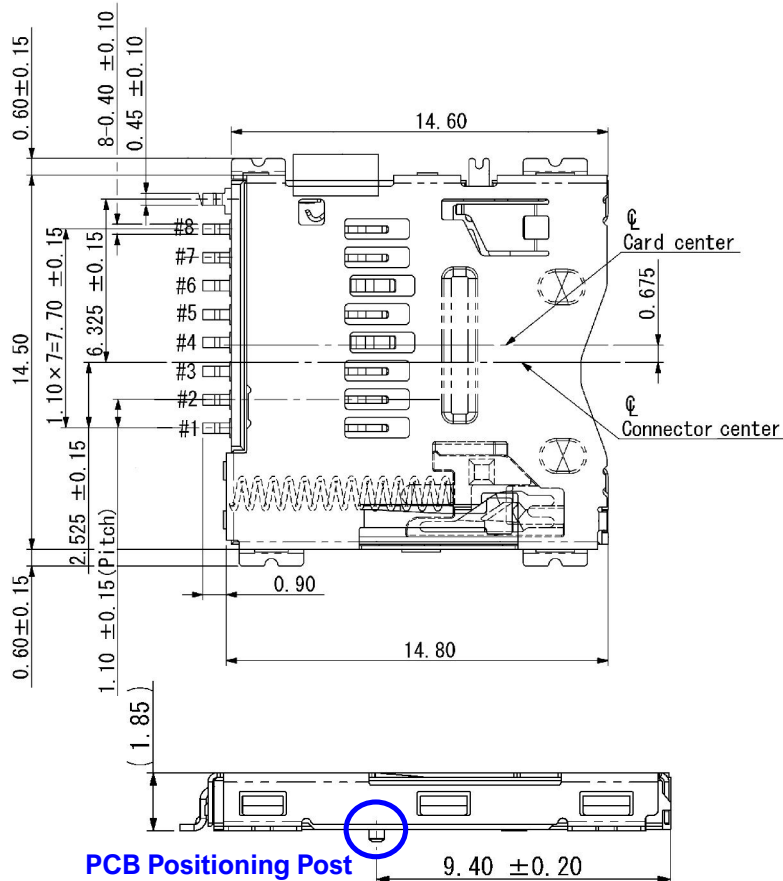

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PJS008-2003-1 on WIN SOURCE](#)

 [Yamaichi Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management